

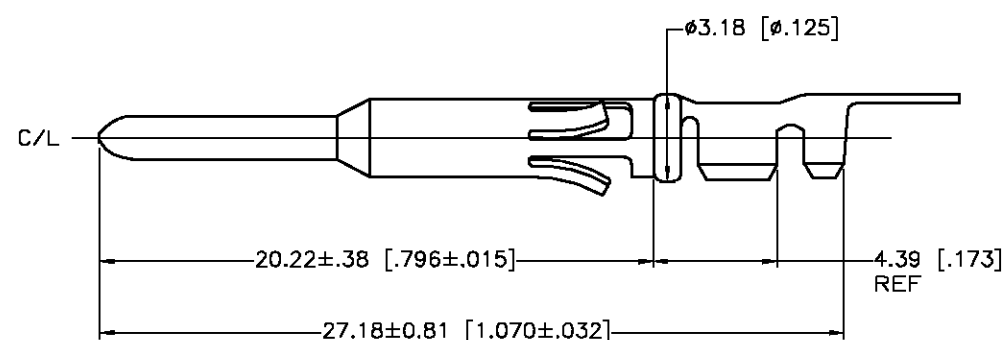


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN APVD
BD	39		G	REV PER EC 0G3B-0317-03	24APR03	VF GS

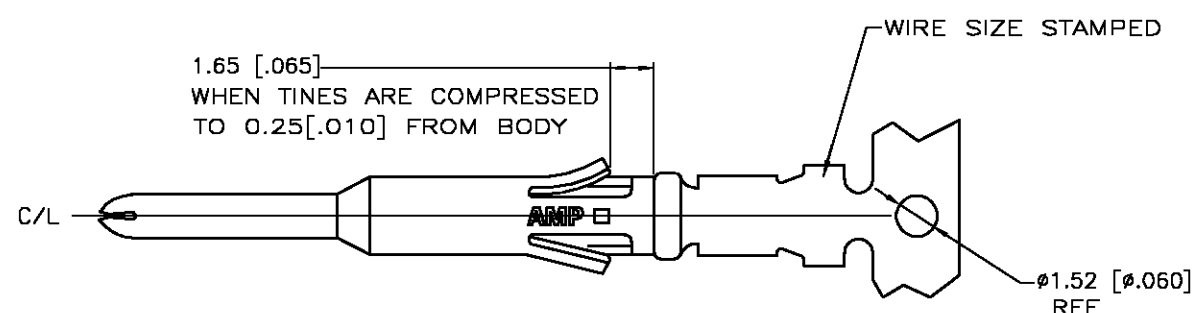

SECTION B-B

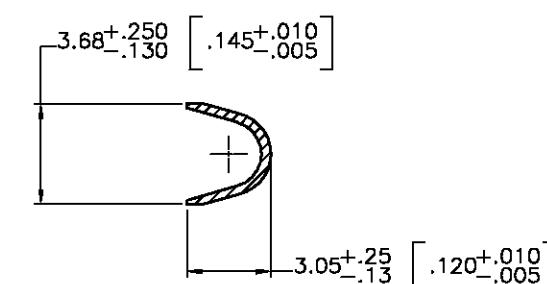

SECTION A-A

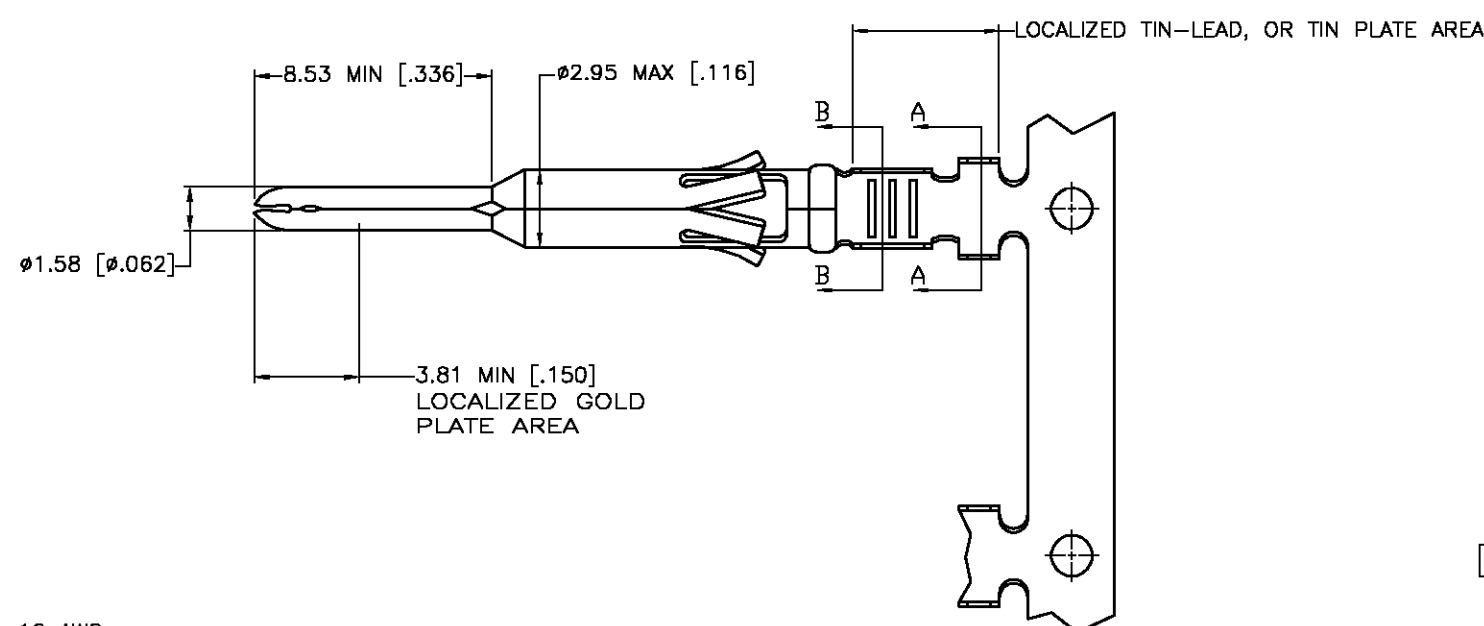

1. WIRE RANGE 18-16 AWG.
 2. INSULATION RANGE 2.54-2.03 [.100-.080] DIA.
 3. FOR LOOSE PIECE PART SEE DWG 66589.
- ⚠ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.
- ⚠ TIN PLATED.
- ⚠ 2.54µm [.000100] MIN SILVER OVER 1.27µm [.000050] MIN NICKEL.
- ⚠ GOLD PLATING PER MIL-G-45204, SILVER PER QQ-S-365, TIN PER MIL-T-10727
AND NICKEL PER QQ-N-290.
- ⚠ 0.76µm [.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA,
1.27µm [.000050] MIN TIN IN LOCALIZED TIN PLATE AREA,
BOTH OVER 1.27µm [.000050] MIN NICKEL.

OBSOLETE

REVERSE REELED FOR MINI-APPLICATOR	8	66579-7
-	6	66579-6
REVERSE REELED FOR MINI-APPLICATOR	4	66579-4
-	4	66579-3
REVERSE REELED FOR MINI-APPLICATOR	5	66579-2
-	5	66579-1
DESCRIPTION	FINISH	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN V. FURLER 14MAY2003	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: MM [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK G. STEINHAUER 16MAY03		
	0 PLC ± -	APVD G. STEINHAUER 16MAY03	NAME CONTACT, PIN, STRIP, TYPE VI, MULTIMATE	
	1 PLC ± -	PRODUCT SPEC		
	2 PLC ± 0.13 [.005]	APPLICATION SPEC	SIZE A3	
	3 PLC ± -	WEIGHT		
MATERIAL BRASS MIL-C-50	4 PLC ± -	CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO C-66579
	ANGLES ± -	SCALE 8:5	SHEET 1 OF 1	REV G
	FINISH SEE TABLE			