


32.768 kHz SMD LOW PROFILE CRYSTAL

ABS09

ABS09



RoHS
Compliant



4.1 x 1.5 x 0.9 mm

ABS09 is not recommended for new designs. Please consider the ABS04W or ABS05.

FEATURES:

- Low frequency in small size SMD
- 0.9mm height ideal for high density circuit boards
- Ceramic package offers excellent environmental & heat resistance
- Extended temperature -40°C to +85°C for industrial applications

APPLICATIONS:


- Wide range in communication & measuring equipment
- Commercial & Industrial applications
- Wireless communications
- PDA and Palm Pilots

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ABS09
Nominal Frequency	32.768 kHz
Operating Temperature	-40°C to + 85°C
Turn-over Temperature	+25°C to ±5°C
Storage Temperature	-55°C to +125°C
Frequency Tolerance	±20 ppm max.
Temperature Coefficient (β)	- 0.034±0.006 ppm/T ²
Equivalent Series Resistance	70 kohms max.
Load Capacitance CL	12.5 pF (see option)
Drive Level	1.0 μW max.
Aging (first year) 25°C	± 5 ppm max.
Insulation Resistance	500 MΩ with 100 Vdc ±15V
Shunt capacitance Co	1.0pF typ.
Motional capacitance C1	2.0fF typ.

TUNING FORK CRYSTAL TEMPERATURE CURVE

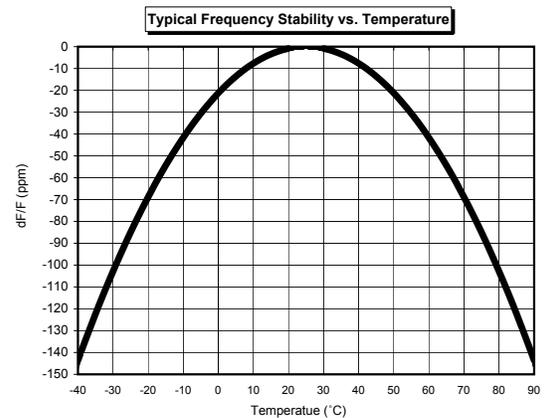

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)


ABS09-32.768kHz-□ - □ - □

Load Capacitance		Freq. Tolerance		Packaging	
Blank	12.5pF	1	± 10 ppm	Blank	Bulk
9	9pF	4	± 30 ppm	T	Tape and Reel
7	7pF				

*Contact ABRACON for non-standard load capacitance

32.768kHz SMD LOW PROFILE CRYSTAL

ABS09




4.1 x 1.5 x 0.9 mm

ABS09




RoHS
Compliant

OUTLINE DRAWING:

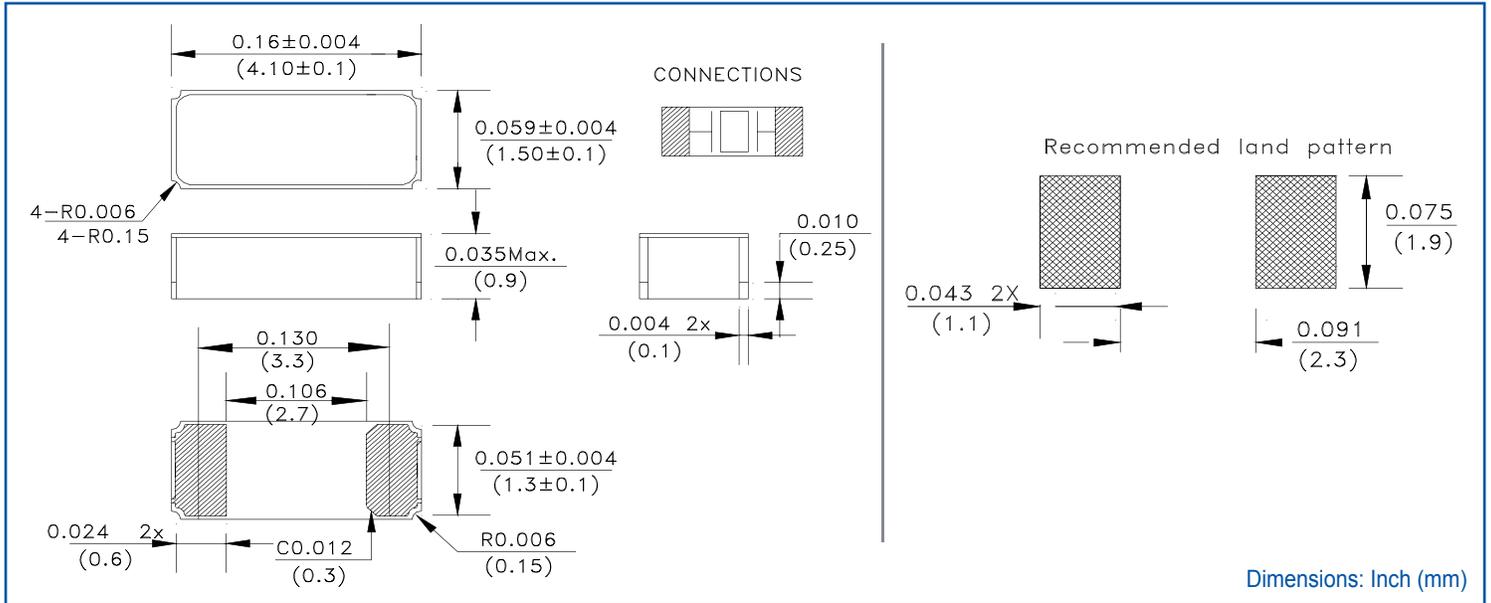

TAPE & REEL: T = Tape and reel 3,000pcs/reel

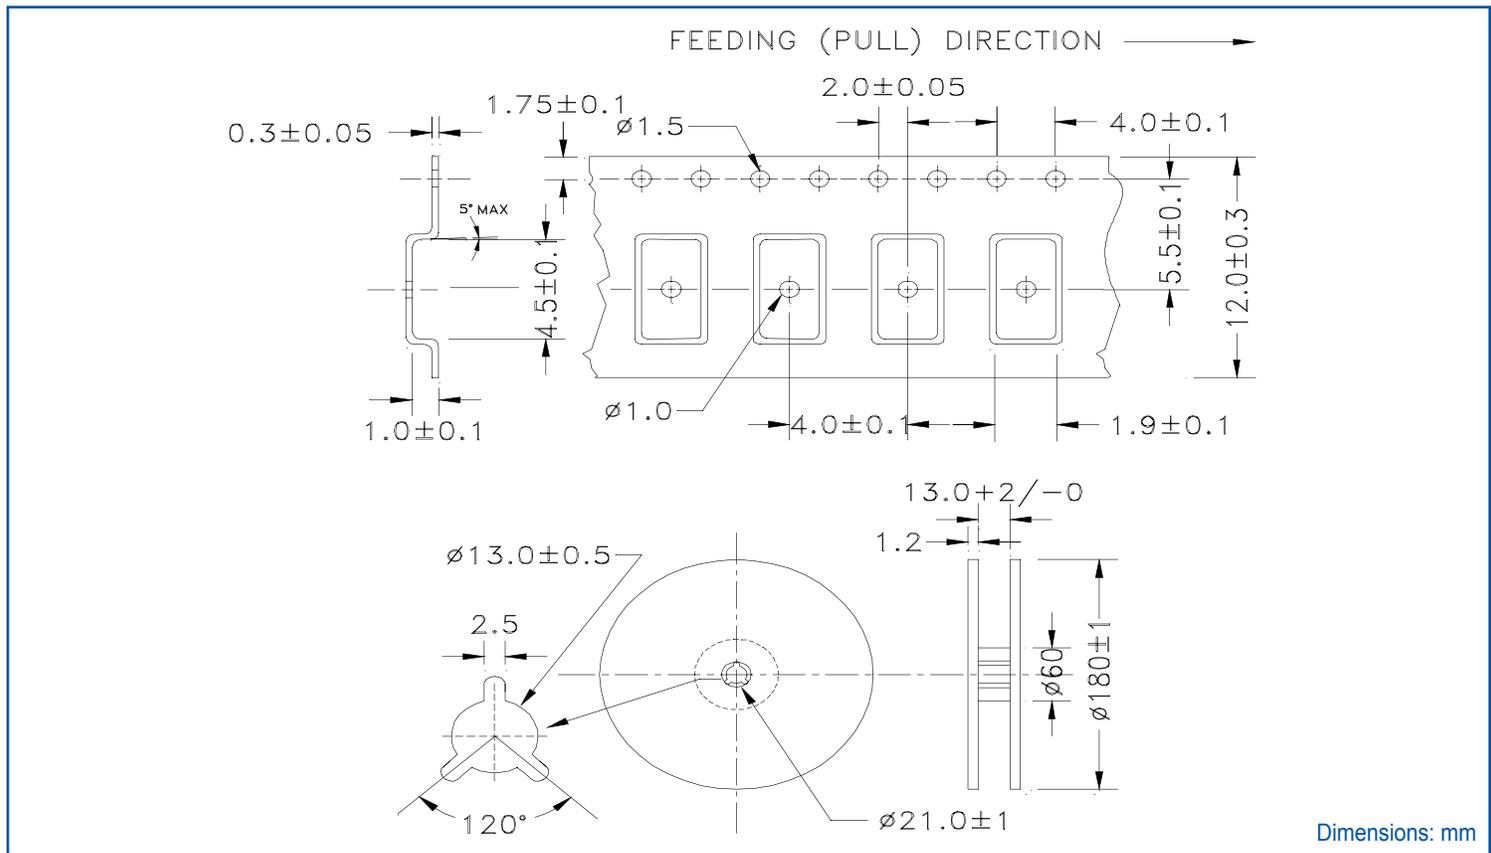

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS1V-T1K-32.768kHz-12.5pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [17000](#) [17301](#) [16875](#) [ECS-80-18-30B-JEM-TR](#)