

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples



Check Inventory



1.1 x 0.9 x 0.7 mm

RoHS Compliant

Features

- GPS/GLONASS/BEIDOU/GALILEO Support
- Smallest Form Factor 1.10 x 0.9 x 0.70 mm
- Low Insertion Loss
- Industrial Grade -40°C ~ +85°C
- Maximum Input Power: 15dBm
- RoHS Compliant

Applications

- RF Modules
- Transportation & Telematics
- Asset Tracking / Fleet Management
- UAVs, Robotics & Autonomous Vehicles
- Micro-Mobility Solutions
- Precision Agriculture

Electrical Specifications

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency (fc)	-	1582.4	-	MHz	-
Insertion Loss	-	1.8	2.2	dB	1559.05 - 1563.15 MHz
	-	1.2	1.5	dB	1574.42 - 1576.42 MHz
	-	1.5	2.0	dB	1597.78 - 1605.66 MHz
Amplitude Ripple	-	0.2	1.0	dB	1559.05 - 1563.15MHz
	-	0.2	1.0	dB	1574.42 - 1576.42MHz
	-	0.2	1.0	dB	1597.78 - 1605.66MHz
Attenuation	35	38	-	dB	10 - 925 MHz
	38	42	-		1427 - 1463 MHz
	38	42	-		1710 - 1785 MHz
	38	42	-		1850 - 2025 MHz
	40	45	-		2300 - 3000 MHz
	25	30	-		4800 - 5000 MHz
Group Delay	-	16	20	ns	1597.78 -1605.66 MHz
VSWR	-	1.6	2.0	-	1559.05 - 1563.15 MHz
	-	1.2	2.0		1574.42 - 1576.42MHz
	-	1.3	2.0		1597.78 - 1605.66MHz
Group Delay Ripple	-	4	9	ns	1559.05 - 1563.15MHz
	-	2	5		1574.42 - 1576.42MHz
	-	3	6		1597.78 - 1605.66MHz
Input Power Level	-	-	10	dBm	
DC Voltage (V)	-	-	3	V	

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples



Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant

Mechanical Specifications

Parameters	Specifications
Dimension	1.1 x 0.9 x 0.7 mm
Mounting Type	SMD Mount

Environmental Specifications

Parameters	Specifications
Operating Temperature Range	-40°C ~ +85°C
Storage Temperature Range	-40°C ~ +85°C
MSL level	MSL 3
ESD	N/A

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM


Request Samples



Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant

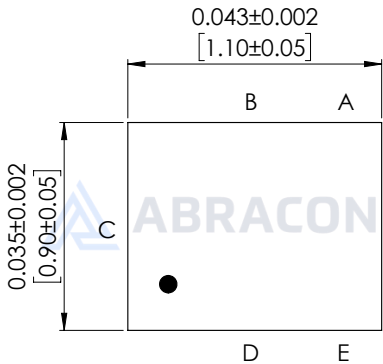


TOP VIEW

Unit: inches[mm]



FRONT VIEW

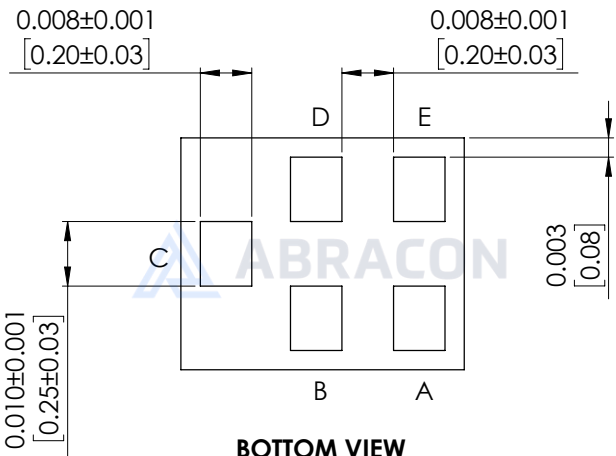

BOTTOM VIEW

Unit: inches [mm]

Pin No.	Description
C	Input
A	Output
B,D	Case Ground
E	To be Grounded

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples




Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant

Measurement Circuit

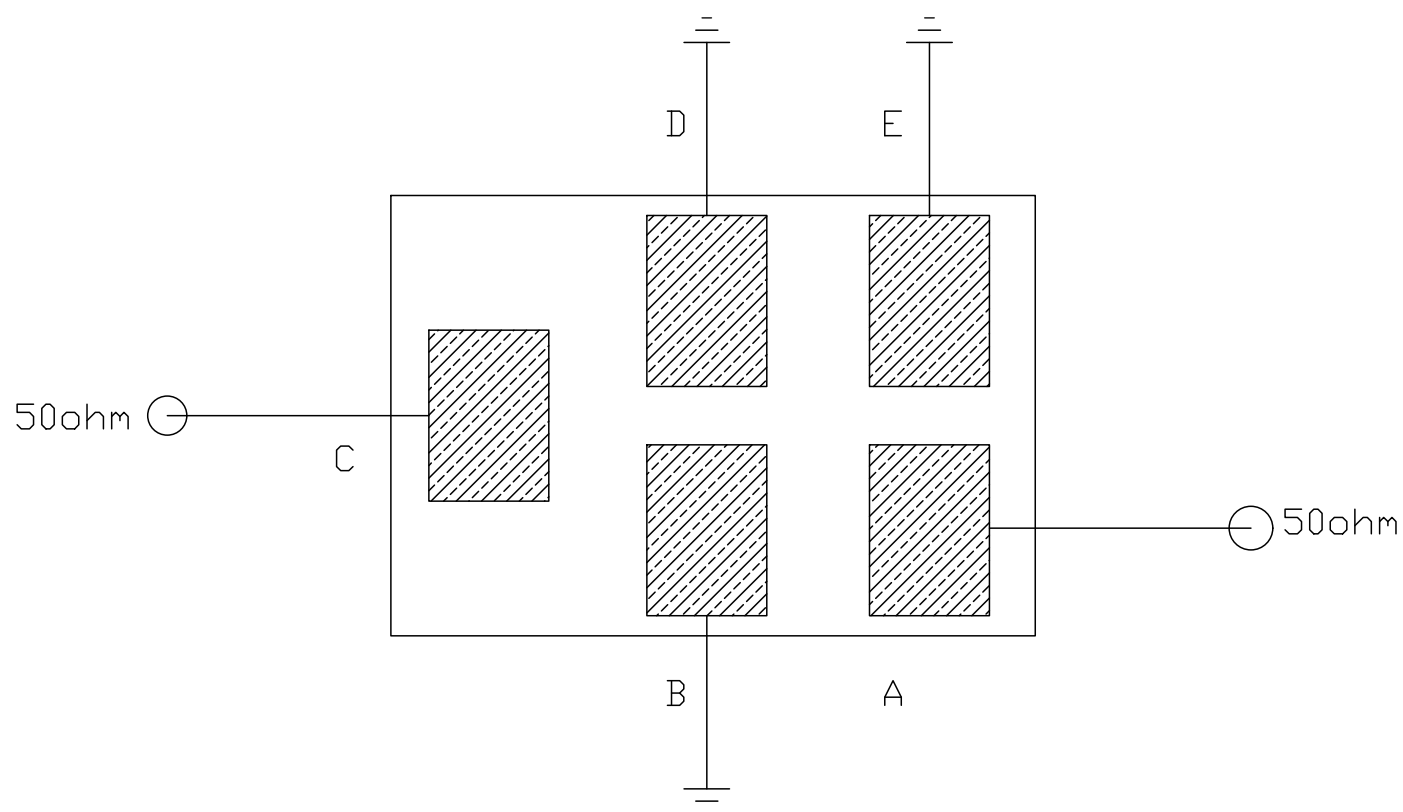

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples





Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant

Frequency Characteristics

S21 narrow band

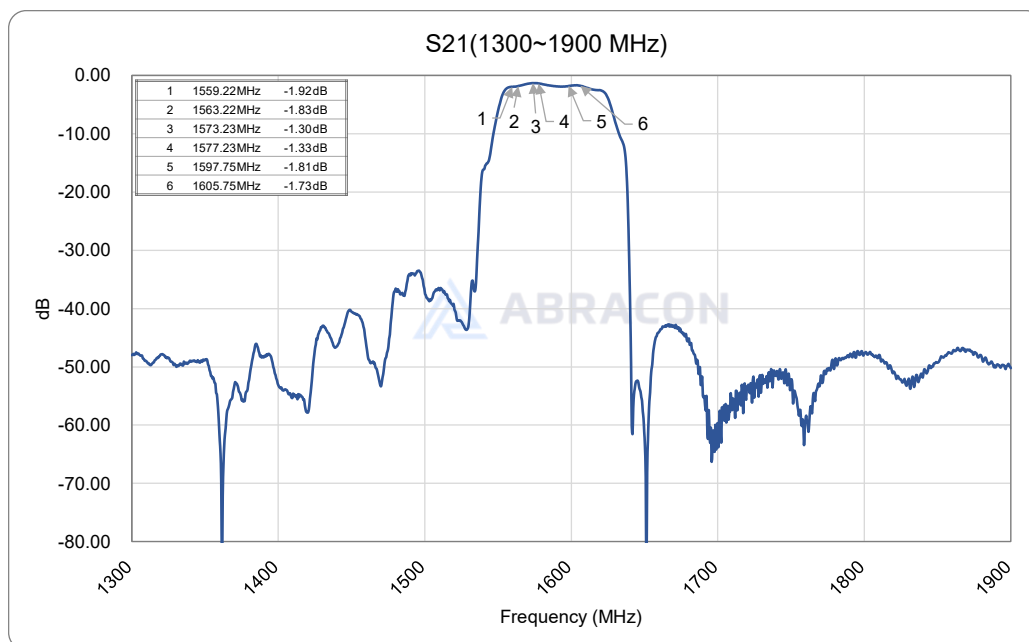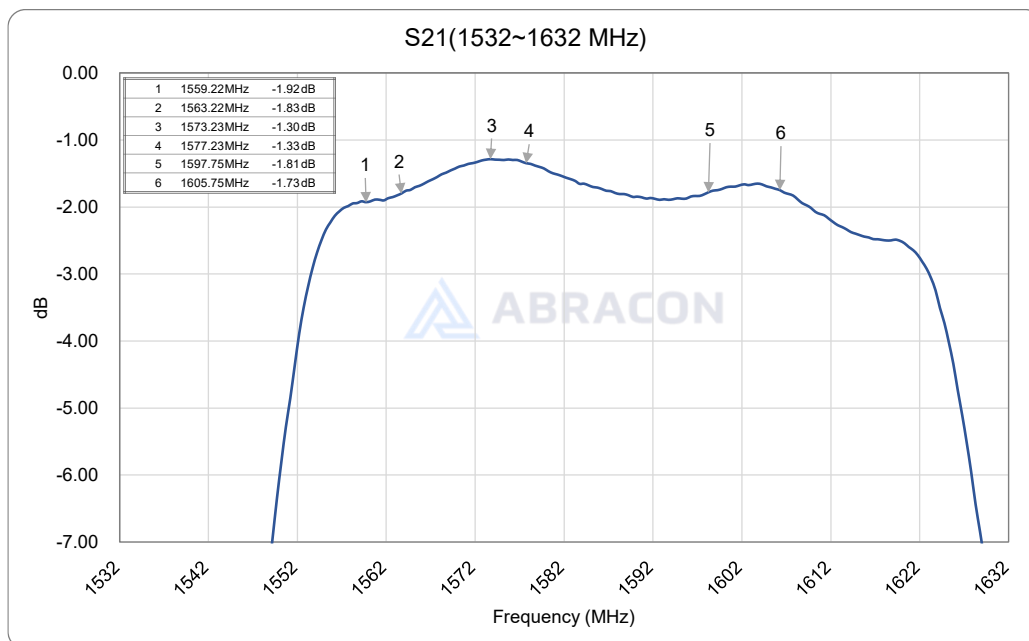

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples




Check Inventory




1.1 x 0.9 x 0.7 mm
RoHS Compliant

S21 wide band

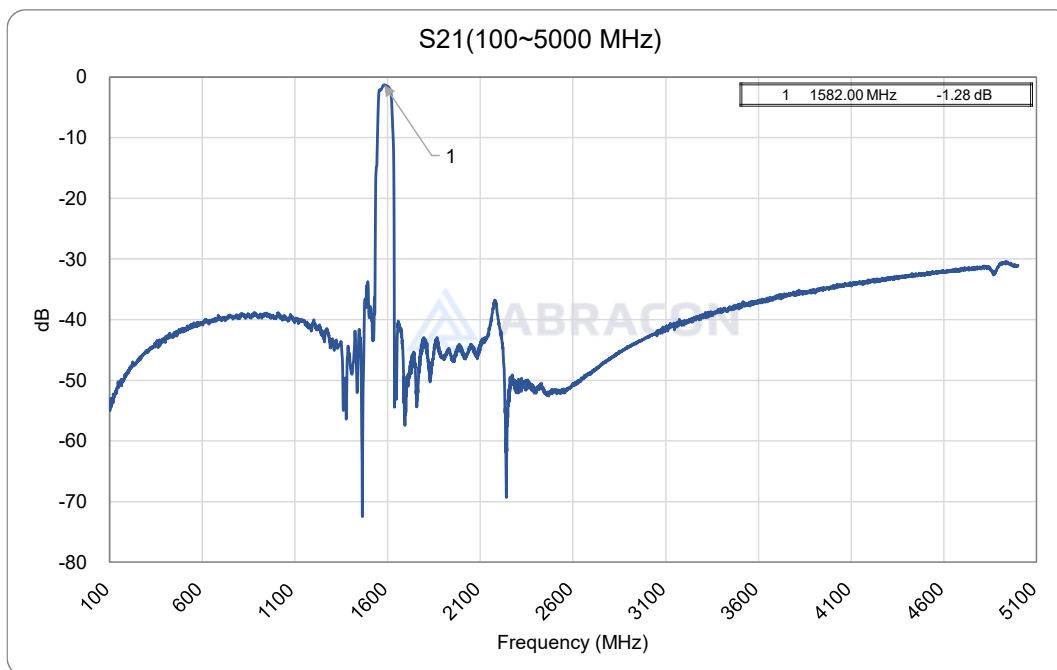

Group Delay Ripple

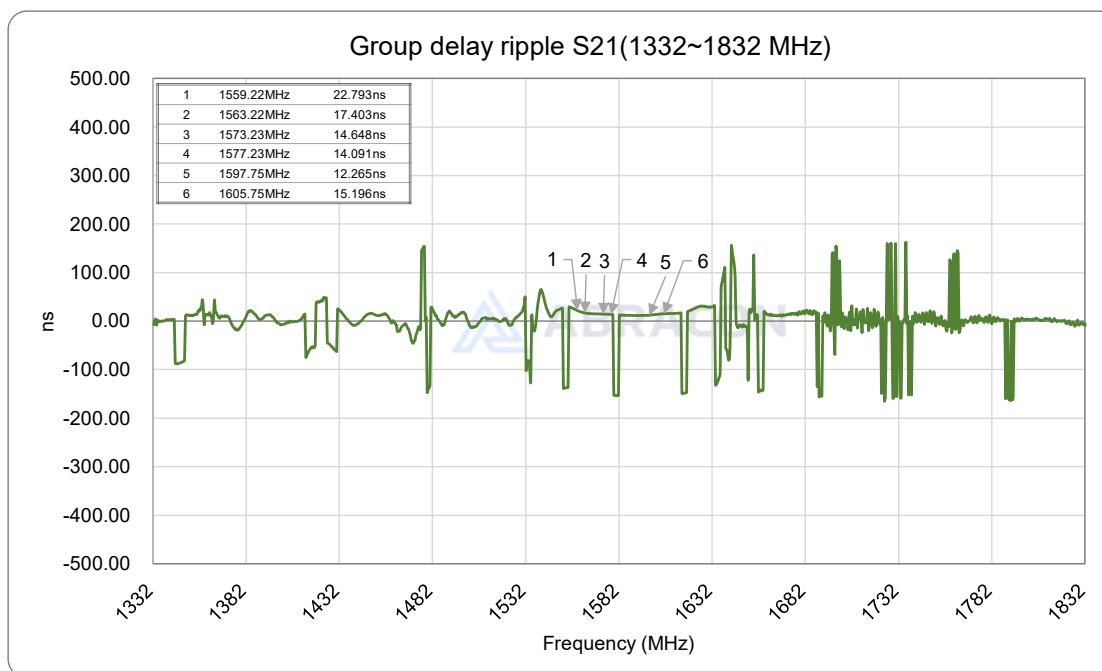

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples





Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant

VSWR (S11 & S22)

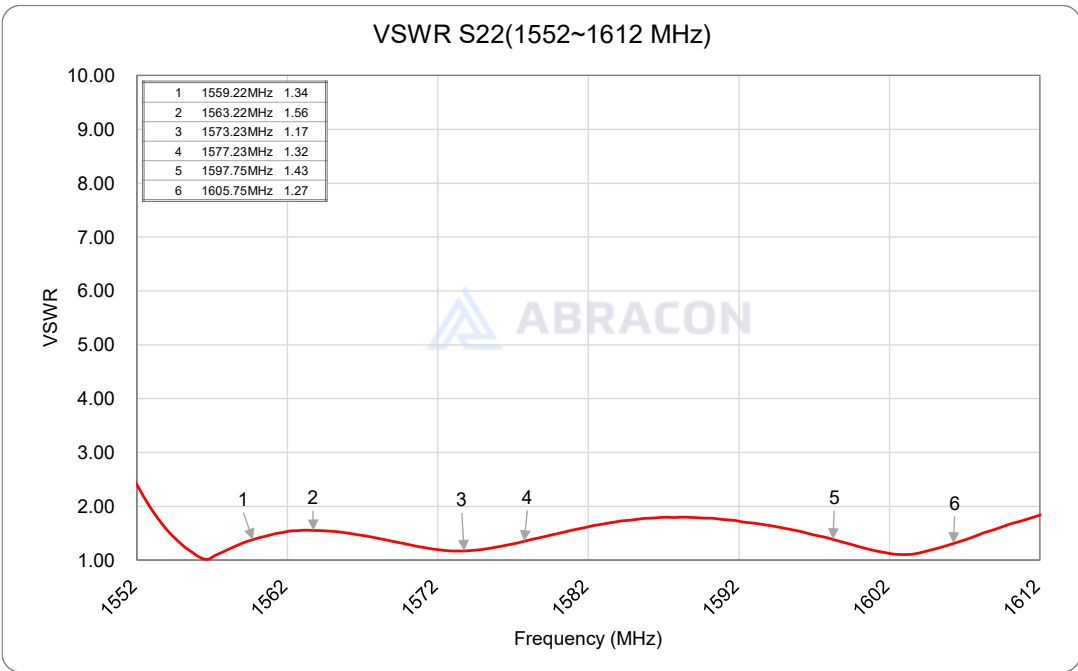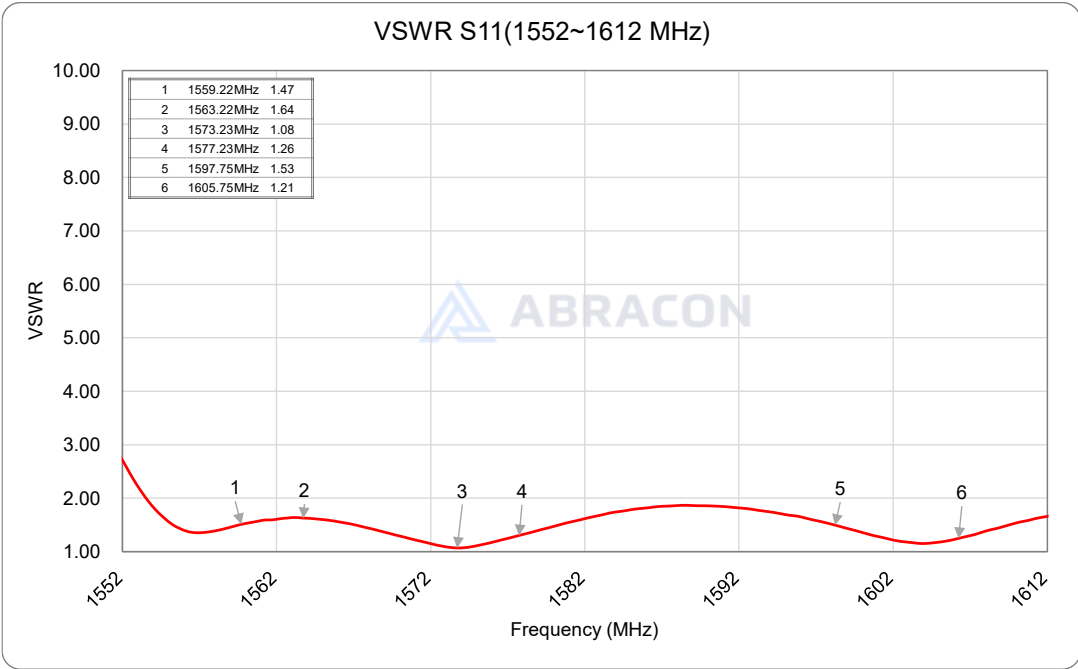

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples




Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant


Smith Chart (S11 & S22)

Smith chart S11 (1550~1610MHz)

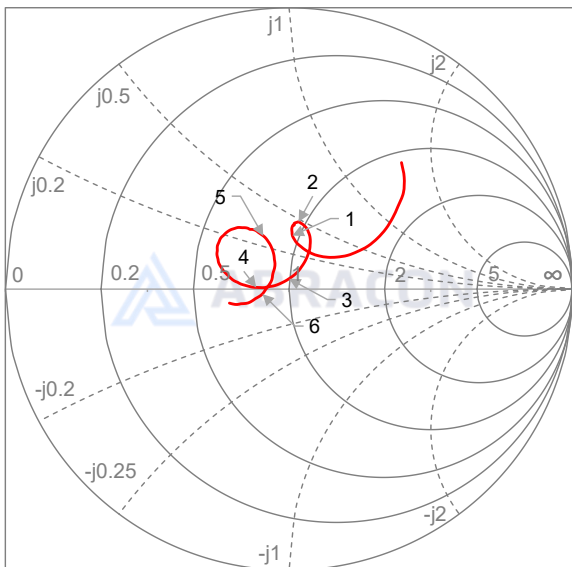

1	1559.22MHz	47.5775Ω	18.7375Ω	1913pH
2	1563.22MHz	47.5369Ω	24.1148Ω	2455pH
3	1573.23MHz	49.8680Ω	3.6867Ω	373pH
4	1577.23MHz	39.6650Ω	0.4694Ω	47pH
5	1597.75MHz	39.0527Ω	15.4029Ω	1534pH
6	1605.75MHz	41.4064Ω	-1.4434Ω	69pF

Smith chart S22 (1550~1610MHz)

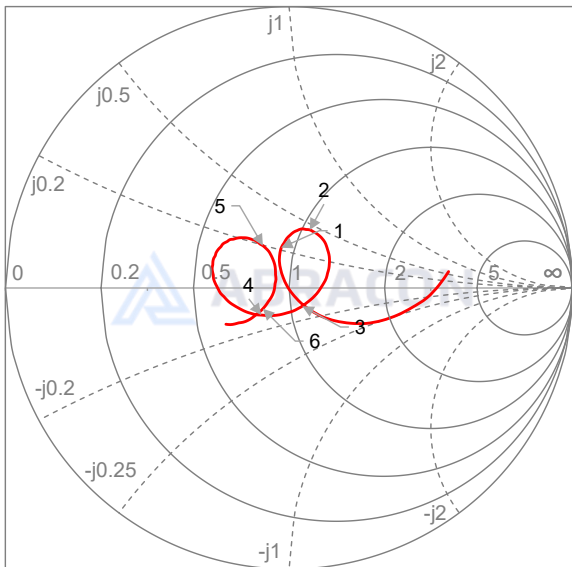

1	1559.22MHz	45.4569Ω	13.2634Ω	1354pH
2	1563.22MHz	52.7546Ω	22.8961Ω	2331pH
3	1573.23MHz	54.4505Ω	-7.0770Ω	14pF
4	1577.23MHz	40.3826Ω	-7.9463Ω	13pF
5	1597.75MHz	39.8432Ω	12.3622Ω	1231pH
6	1605.75MHz	41.1180Ω	-6.1720Ω	16pF

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples



Check Inventory



1.1 x 0.9 x 0.7 mm
RoHS Compliant

Reflow Profile [JEDEC J-STD-020]

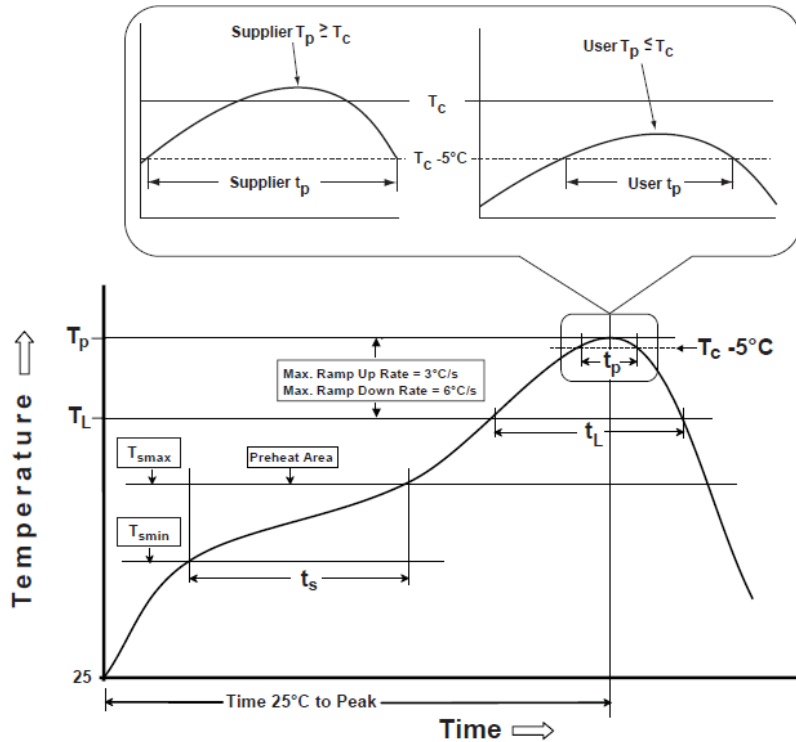


Table 1

SnPb Eutectic Process
Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process
Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

SMD 1582.4MHz SAW Filter

ABSES5AF-L100KM

Request Samples



Check Inventory




1.1 x 0.9 x 0.7 mm
RoHS Compliant

Packaging

Tape & Reel (10,000 pcs / reel)

1. Tape & Reel Dimension

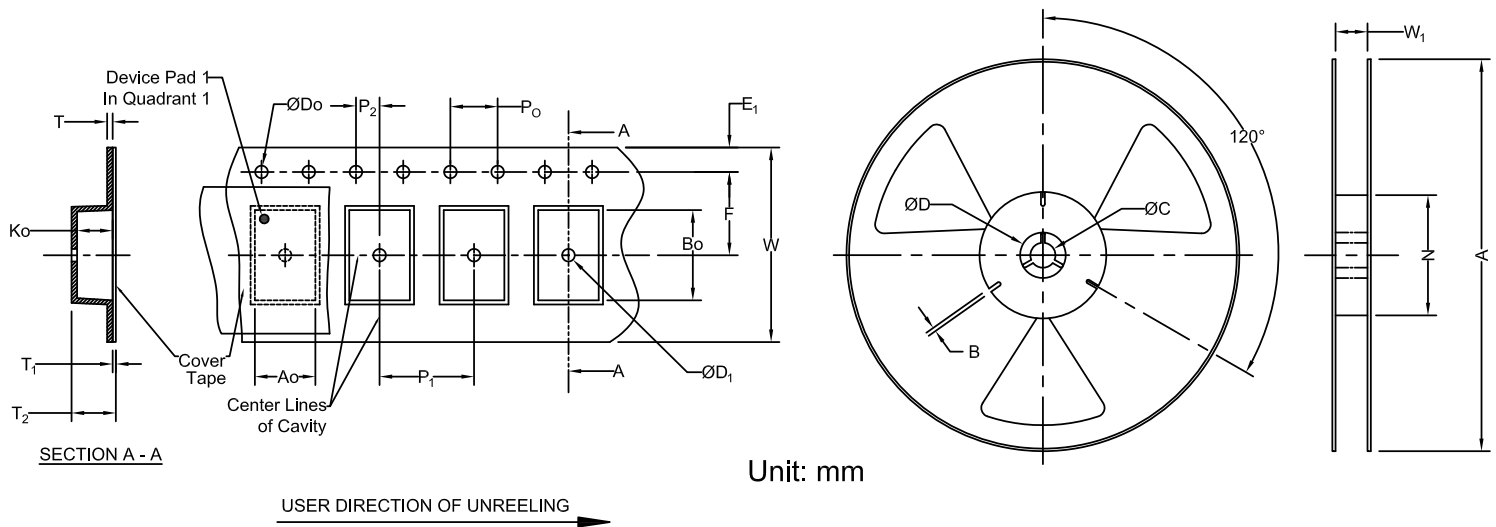

Carrier Tape Specifications (mm)

D0	D1	E1	P0	P2	T	F	P1	W	A0	B0	K0	Reel Qty
1.50 ± 0.1	0.5 ± 0.1	1.75 ± 0.1	4.0 ± 0.1	2.0 ± 0.05	0.2 ± 0.03	3.5 ± 0.05	2.0 ± 0.1	8.0 ± 0.3	0.95 ± 0.05	1.15 ± 0.05	0.68 ± 0.04	10,000

Reel Specifications (mm)

A	W1	N	C	B
178.0 ± 0.05	9.0 ± 0.3	60 ± 0.2	13.3 ± 0.2	2.2 ± 0.2

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 01-24-23

ABRACON IS
ISO9001-2015
CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#)
[PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#)
[BD1722J50200AHF](#) [DS-329-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [11305-10](#) [5962-9091202MXA](#)
[3A412S](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#) [B39781B8005P810](#) [B39881B8013P810](#) [B39791B8039P810](#)
[B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#) [SF2395E](#) [SF2188D](#)