

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples



Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant


Features

- Bandpass SAW Filter with 60 MHz bandwidth
- Surface Mount 3.0 x 3.0 x 1.3 mm package
- Single-Ended Input and Output
- Excellent selectivity with high out-of-band rejection

Applications

- Base Station Applications
- Wireless infrastructure
- Distributed Antenna Systems (DAS)
- Wireless Repeaters

Product Image



1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples



Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant

Electrical Specification

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency (fc)	-	1880	-	MHz	
Insertion Loss	-	3.0	4.0	dB	1850 – 1910 MHz
Amplitude Ripple	-	1.7	2.5	dB _{p-p}	1850 – 1910 MHz
Attenuation	20	32	-	dB	D.C.~1660 MHz
	25	32	-		1660~1721 MHz
	20	37			1721~1800 MHz
	7	19			1930~1990 MHz
	25	37			2000~2040 MHz
	31	38			2040~2480 MHz
	25	28			3700~3820 MHz
VSWR	-	1.8	2.0	-	1850 – 1910 MHz
DC Voltage	-	-	5	V	
Input Power	-	-	10	dBm	
Source Impedance (single ended) ¹	-	50	-	Ω	
Load Impedance (single ended) ¹	-	50	-	Ω	

Notes: (1) No Matching Network (Ref. Testing Environment Circuit as shown below)

Mechanical Specification

Parameters	Specifications
Dimension	3.0 x 3.0 x 1.3 mm
Mounting Type	SMD Mount

Environmental Specification

Parameters	Specifications
Operating Temperature Range	-30°C ~ +85°C
Storage Temperature Range	-40°C ~ +85°C
MSL level	N/A
ESD	N/A



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 06-15-23

ABRACON IS
ISO9001-2015
CERTIFIED


1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples  Check Inventory 

3.0 x 3.0 x 1.3 mm
RoHS Compliant

Product Dimensions

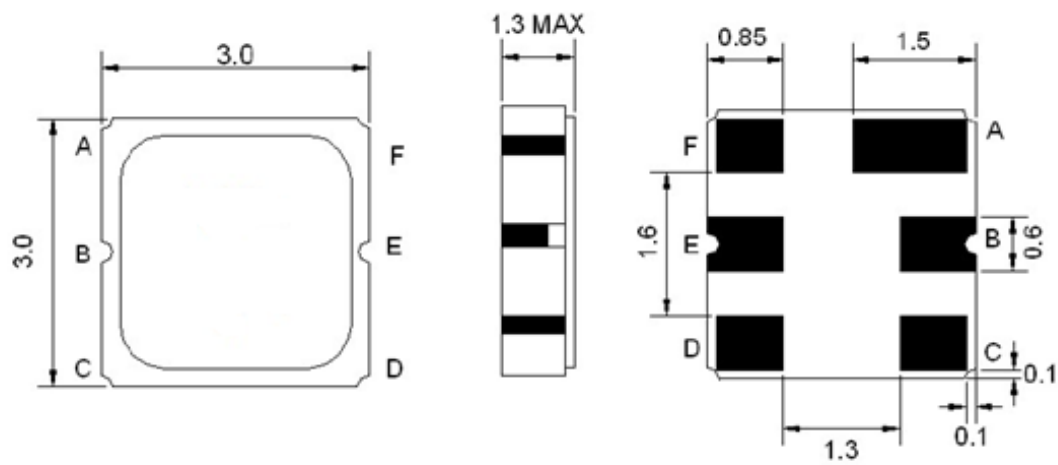

Unit : mm

Pin No.	Description
A,C,D,F	Ground
E	Input
B	Output

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples




Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant

Measurement Circuit

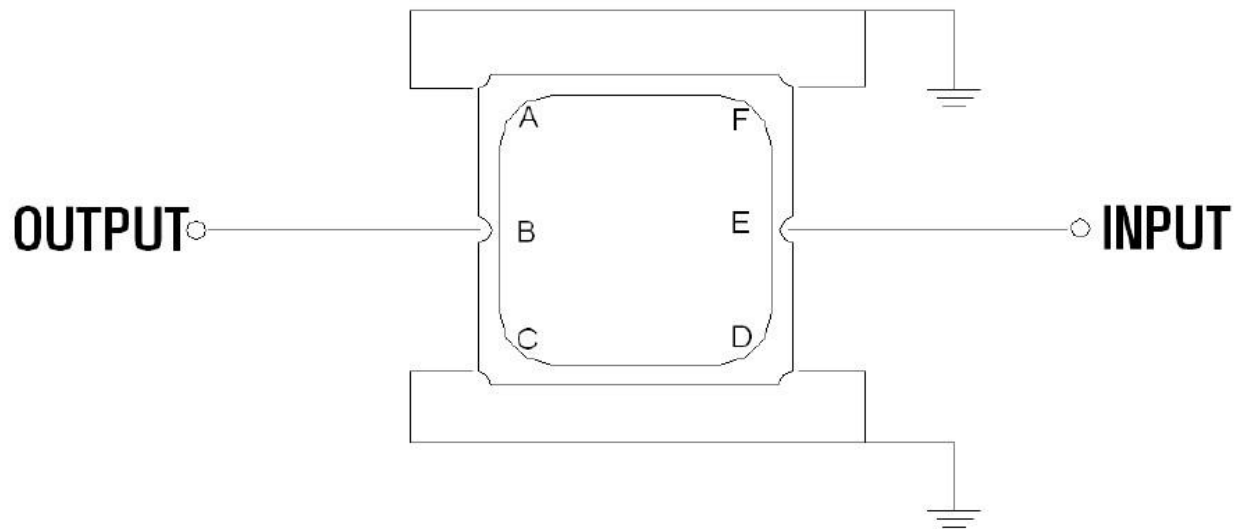

Source & Load Impedance: 50 Ω

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples




Check Inventory




3.0 x 3.0 x 1.3 mm
RoHS Compliant

Frequency Characteristics

S21 narrow band

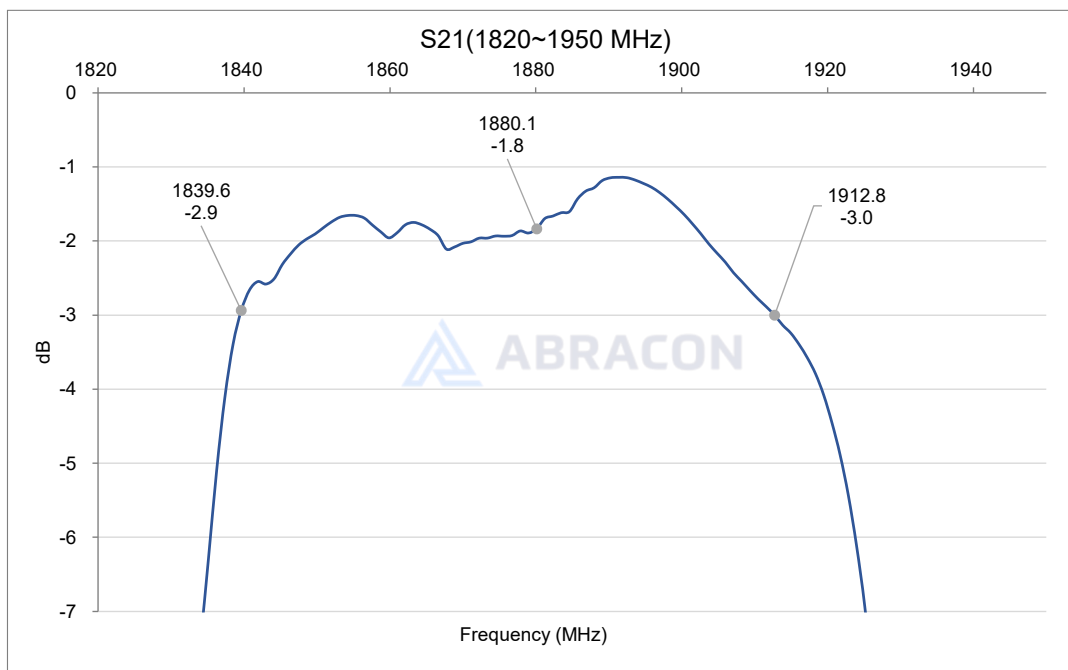

S21 wide band

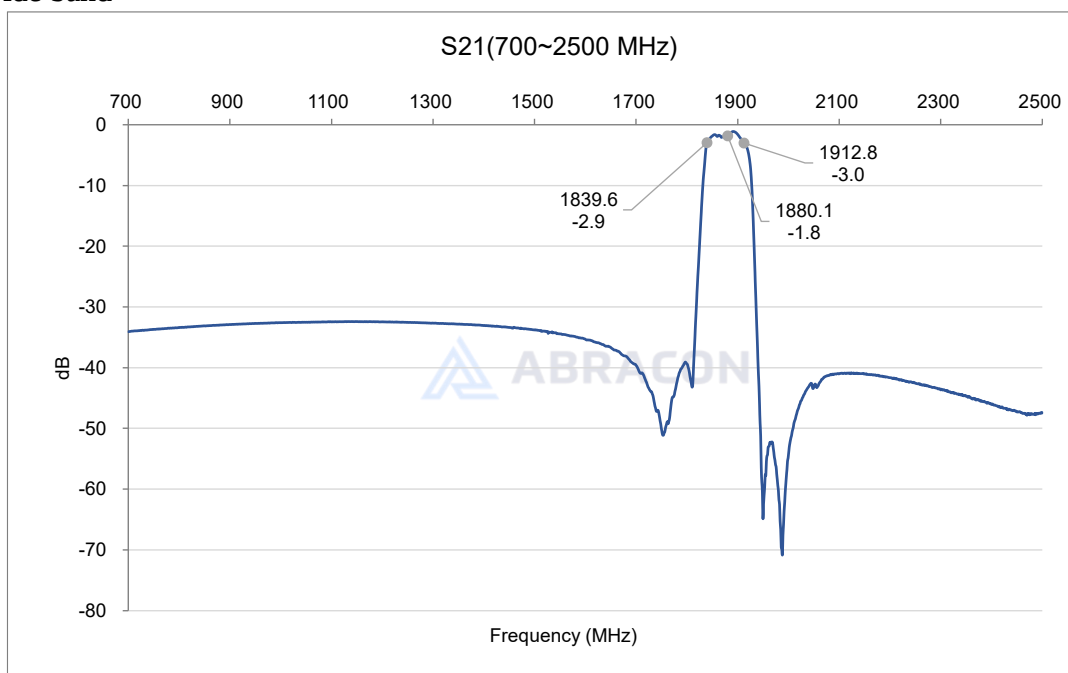

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples




Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant

Group Delay Ripple

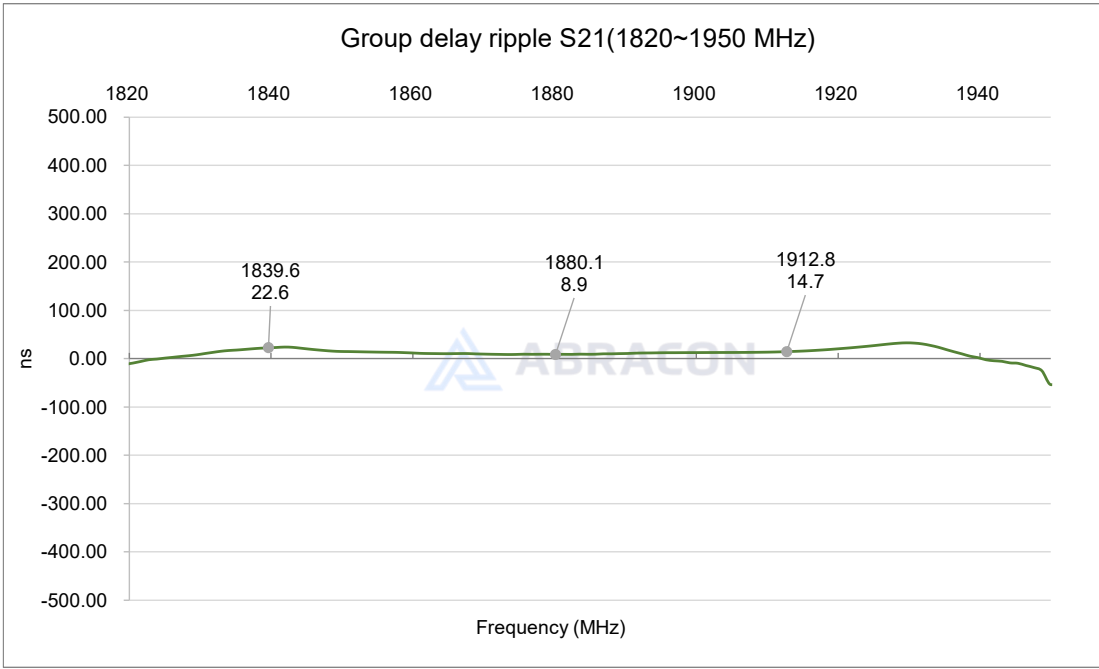

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples





Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant

VSWR (S11 & S22)

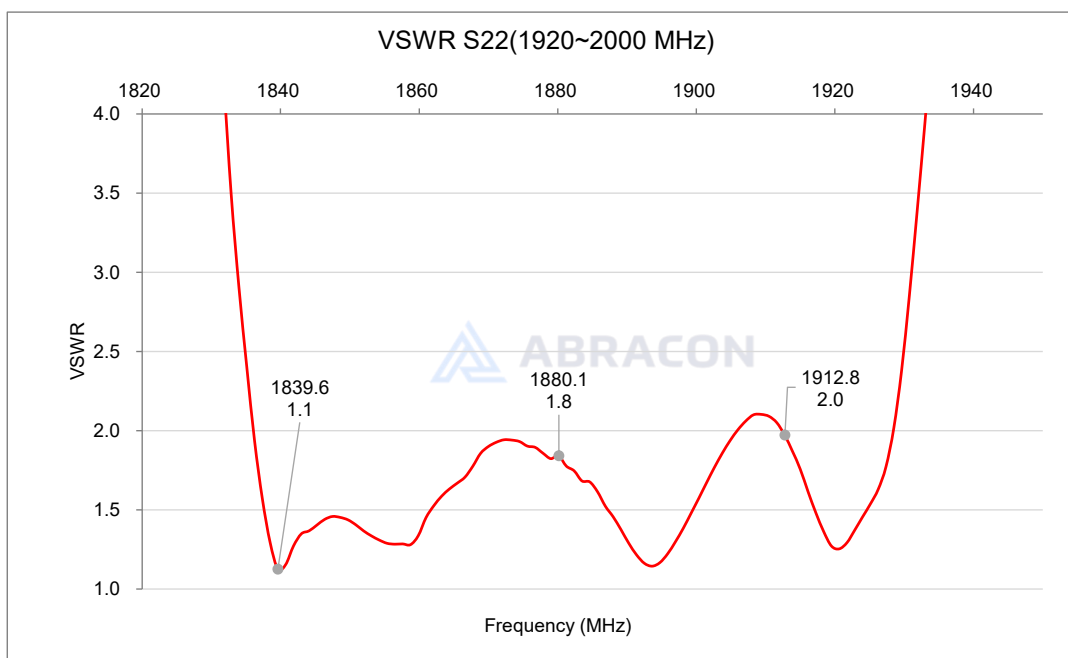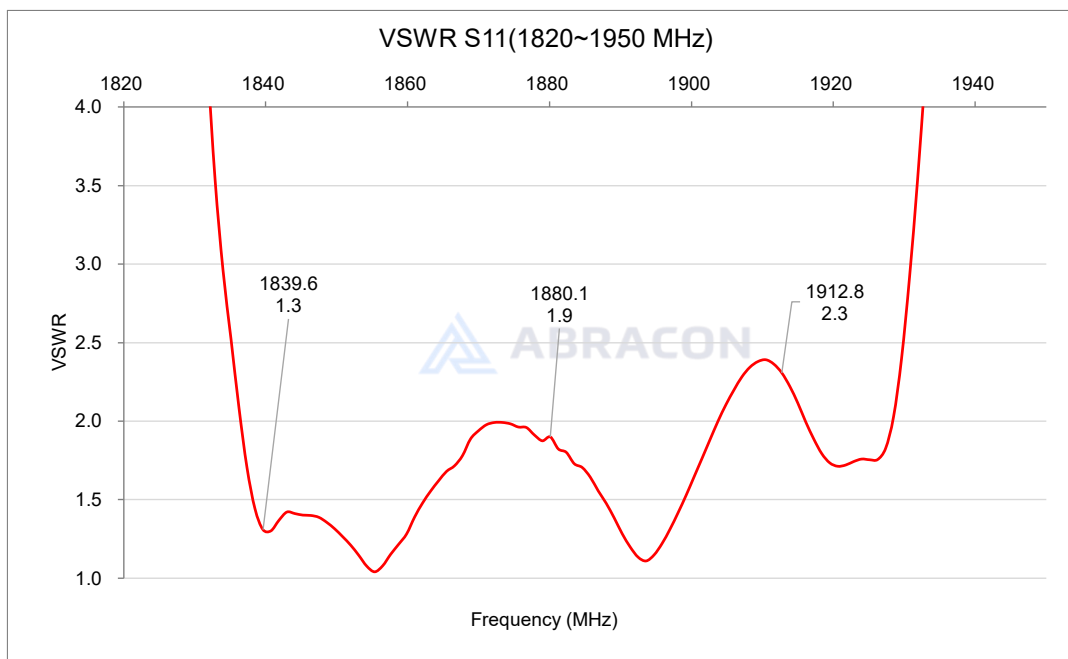

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples




Check Inventory




3.0 x 3.0 x 1.3 mm
RoHS Compliant

Smith Chart (S11 & S22)

Smith chart S11 (1840~1912MHz)

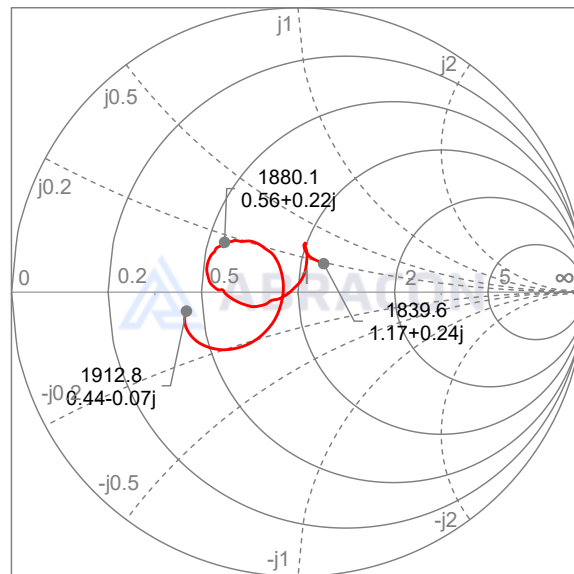

Smith chart S22 (1840~1912MHz)

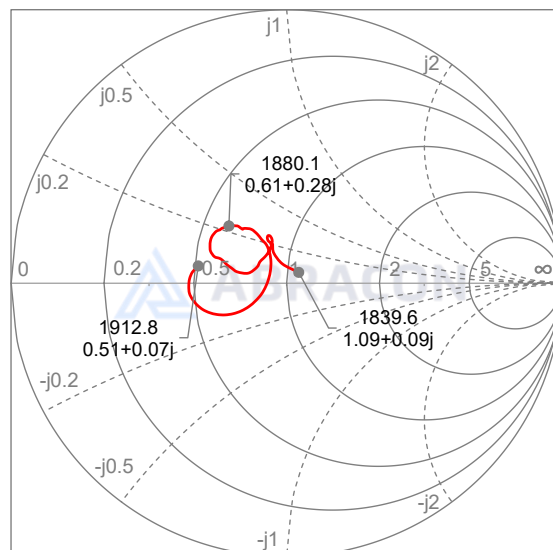

5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISÉ: 06-15-23

ABRACON IS
ISO9001-2015
CERTIFIED

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples



Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant

Reflow Profile [JEDEC J-STD-020]

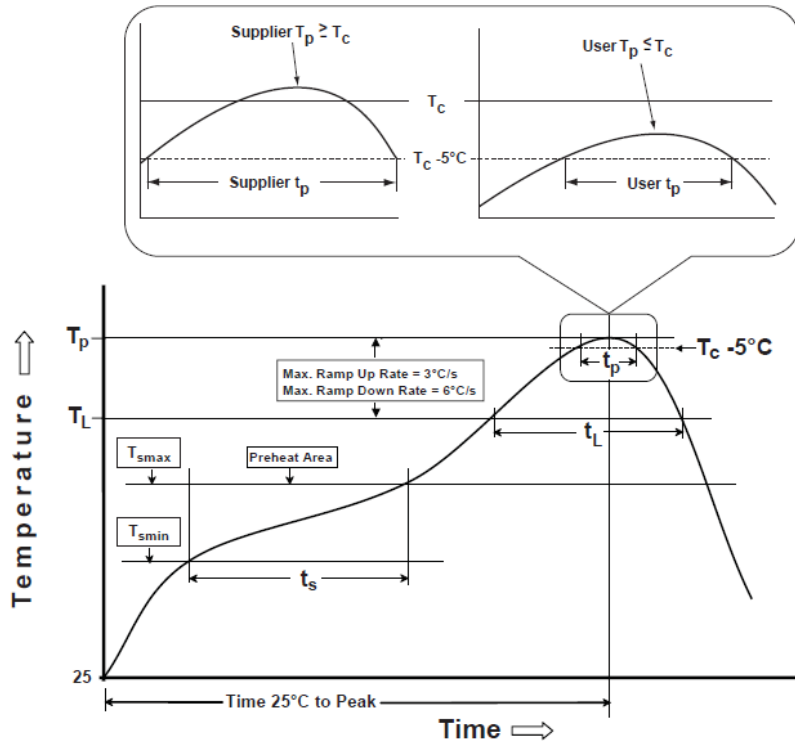


Table 1

SnPb Eutectic Process
Classification Temperatures (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process
Classification Temperatures (T_C)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_C)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

1880 MHz SMD SAW Filter

ABSNS6A7-368M02CM

Request Samples




Check Inventory



3.0 x 3.0 x 1.3 mm
RoHS Compliant

Packaging

Tape & Reel Dimension

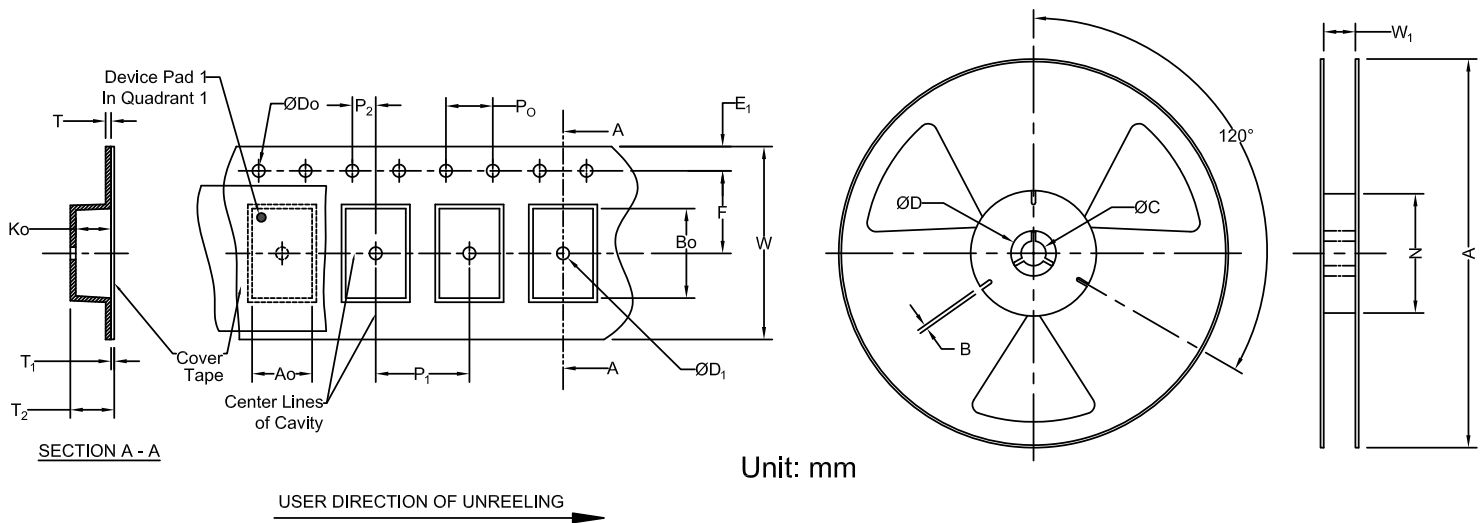

Unit: mm

Carrier Tape Specifications (mm)

E1	P0	F	P1	W	A0	B0	K0	Reel Qty
1.75 ± 0.1	4.0 ± 0.1	5.5 ± 0.10	8.0 ± 0.1	12.0 ± 0.3	3.4 ± 0.1	3.4 ± 0.1	1.4 ± 0.1	2,500

Reel Specifications (mm)

A	W1	N	C
330 ± 1.0	12.0 ± 1.0	62 ± 1.0	13 ± 0.5

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 06-15-23

ABRACON IS
ISO9001-2015
CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)