

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples





Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Description

This highly compact GNSS L2 band filter, measuring just 1.1 x 0.9 x 0.5 mm, delivers exceptional performance for high-precision positioning systems. It features a wide 52 MHz bandwidth and a low insertion loss of 1.4 dB, ensuring minimal signal degradation. With robust out-of-band rejection greater than 31 dB, it is ideally suited for RTK modules, automotive telematics, and autonomous vehicles, providing the reliable signal integrity required for accurate navigation and asset tracking in demanding applications. The component is RoHS compliant with an MSL Level 3 rating.



Features

- Supports GNSS L2 Band
- Bandwidth: 52MHz
- just 1.1 x 0.9 x 0.5 mm in Size
- Low Insertion Loss: 1.4 dB
- Out-of-Band Rejection: > 31 dB
- Maximum Input Power: +10 dBm
- [RoHS Compliant](#) | [MSL Level 3](#)

Applications

- High-Precision GNSS Modules
- RTK Systems
- Automotive Transportation & Telematics
- Asset Tracking / Fleet Management
- UAVs, Robotics & Autonomous Vehicles
- Micro-Mobility Solutions
- Precision Agriculture

Ordering Information

Part Number	Description
ABSTS5A2-22NM024M	1223 MHz SMD SAW Filter on Tape & Reel
ABSTS5A2-22NM024M-EVB	1223 MHz SMD SAW Filter Evaluation Board

Note: Other options not listed may be available upon request via [Abracon online support](#)



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee
Cave, TX 78738
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-16-25

ABRACON IS
ISO9001-2015
CERTIFIED

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples



Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Electrical Specification

Parameters	Minimum	Typical	Maximum	Units	Notes
Center Frequency(f_c)	-	1223	-	MHz	-
VSWR	-	1.92	2.32		1197~ 1249 MHz
Insertion Loss	-	1.8	2.6	dB	1197~ 1249 MHz (-40°C ~ +85°C)
	-	1.8	2.8		1197~ 1249 MHz (-40°C ~ +105°C)
Amplitude Ripple ⁽¹⁾	-	0.3	1.5		1197~ 1249 MHz
Group Delay ⁽¹⁾	-	14.6	18.9	ns	1197~ 1249 MHz
Group Delay Ripple ⁽¹⁾	-	1.5	4.3	ns	1197~ 1249 MHz
Attenuation ⁽²⁾ (Reference level from 0 dB)	35	38	-	dB	880 ~ 920 MHz
	40	42	-		1710 ~ 1850 MHz
	40	42	-		1850 ~ 1920 MHz
	38	41	-		1920 ~ 1980 MHz
	30	34	-		2400 ~ 2500 MHz
DC Voltage	-	-	0	V	
Input Power	-	-	10	dBm	
Terminating Source Impedance	-	50	-	Ω	
Terminating Load Impedance	-	50	-	Ω	

Notes: (1) Averaged values of linear S-Parameters at +25°C

(2) A matching network is necessary (refer to the Measurement Circuits section)

Mechanical Specification

Parameters	Specifications
Filter Dimension	1.1 x 0.9 x 0.5 mm
Mounting Type	Surface Mount

Environmental Specification

Parameters	Specifications
Operating Temperature Range	-40°C ~ +105°C
Storage Temperature Range	-40°C ~ +105°C
MSL level	3
ESD	100V (MM), 200V (HBM)
RoHS Compliant	Yes



12117 Bee Caves Rd, Bldg-3, Suite 200 Bee
Cave, TX 78738
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-16-25

ABRACON IS
ISO9001-2015
CERTIFIED

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples




Check Inventory




1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3


Package Dimensions

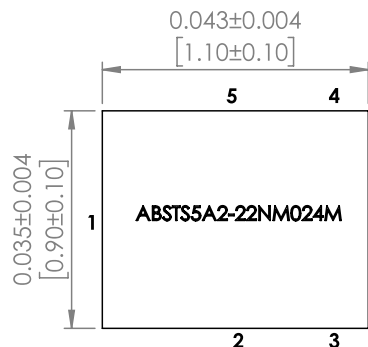

TOP VIEW


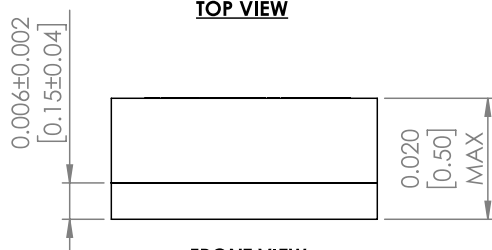


FRONT VIEW

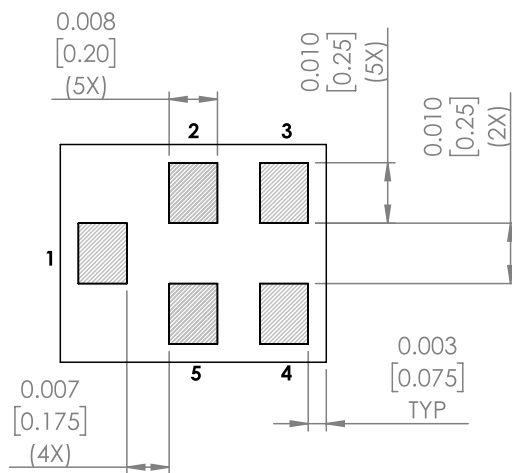

BOTTOM VIEW

Pin Description	
1	Input
4	Output
2,3,5	Ground



All tolerances are +/-0.05 mm unless otherwise specified
Coplanarity : 0.1 mm max.

Unit: inches [mm]

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples




Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Recommended Land Pattern

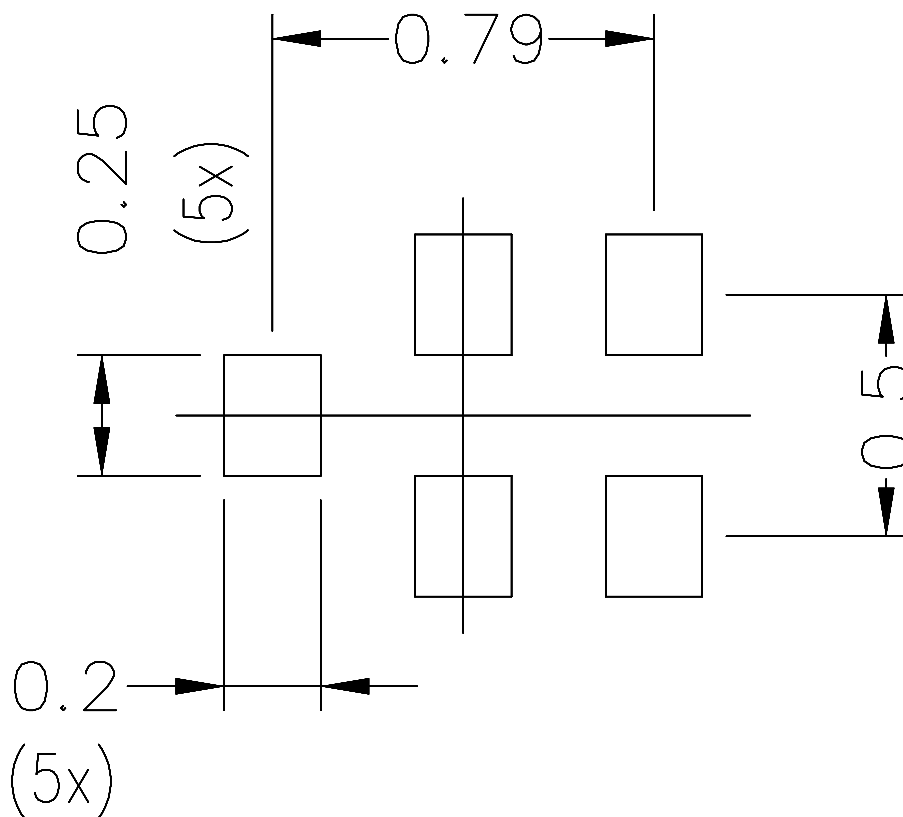

Unit: mm

Please note: The line width should be designed to achieve a 50-ohm characteristic impedance, depending on the PCB material and thickness. For technical assistance, please contact [Abracon online support](#) through our online support platform

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples




Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Measurement Circuit

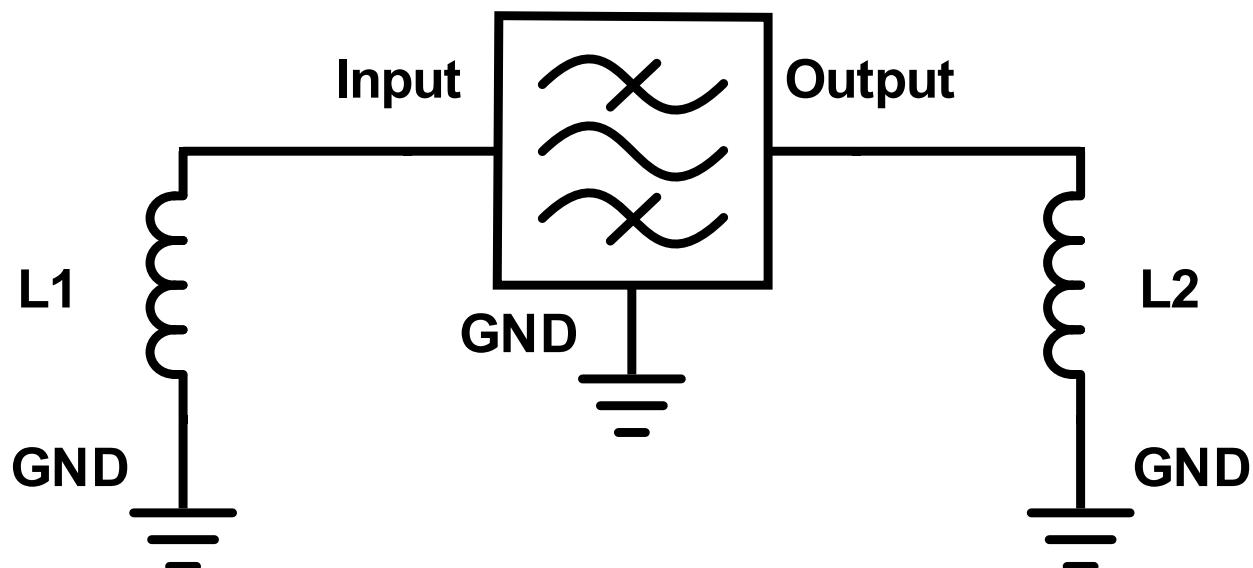

Port	Matching Component
Input (Pin 1)	L1: 12 nH
Output (Pin 4)	L2: 12 nH

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples





Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Frequency Characteristics

S21 Narrow Band

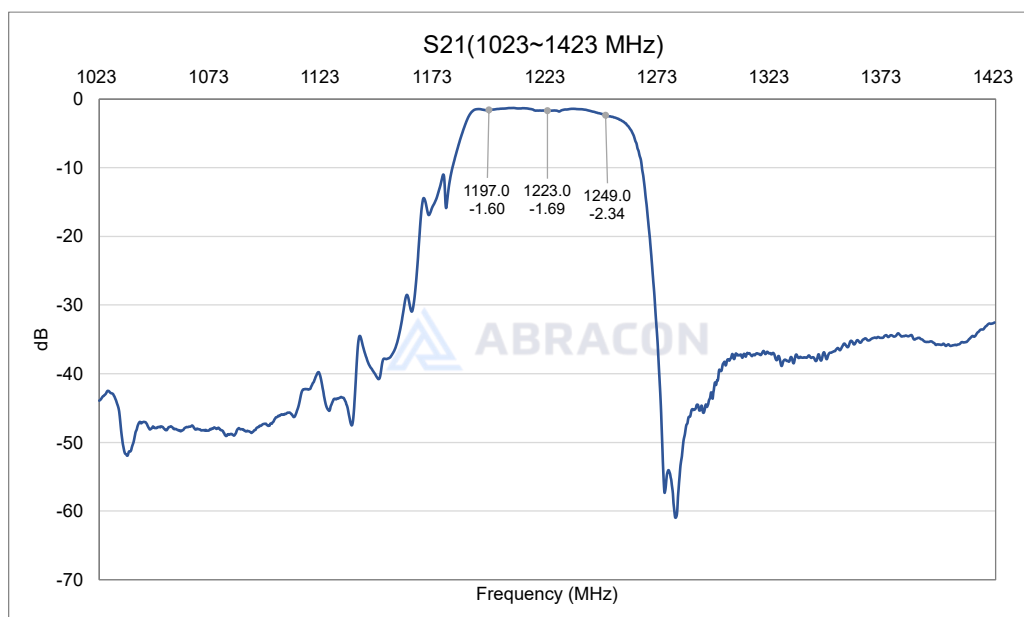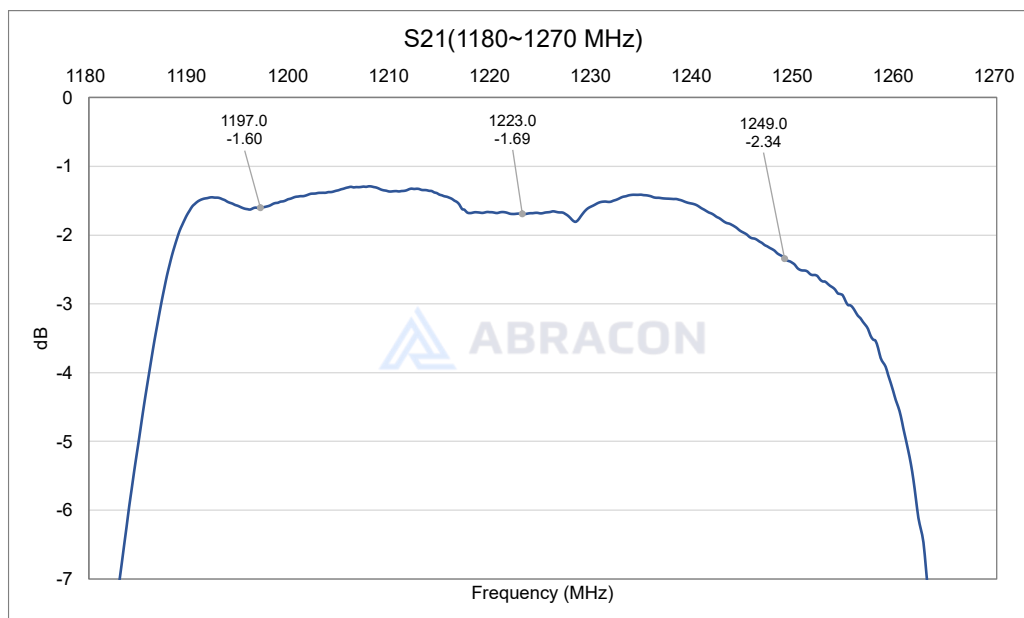

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee
Cave, TX 78738
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-16-25

ABRACON IS
ISO9001-2015
CERTIFIED

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples




Check Inventory




1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

S21 Wide Band

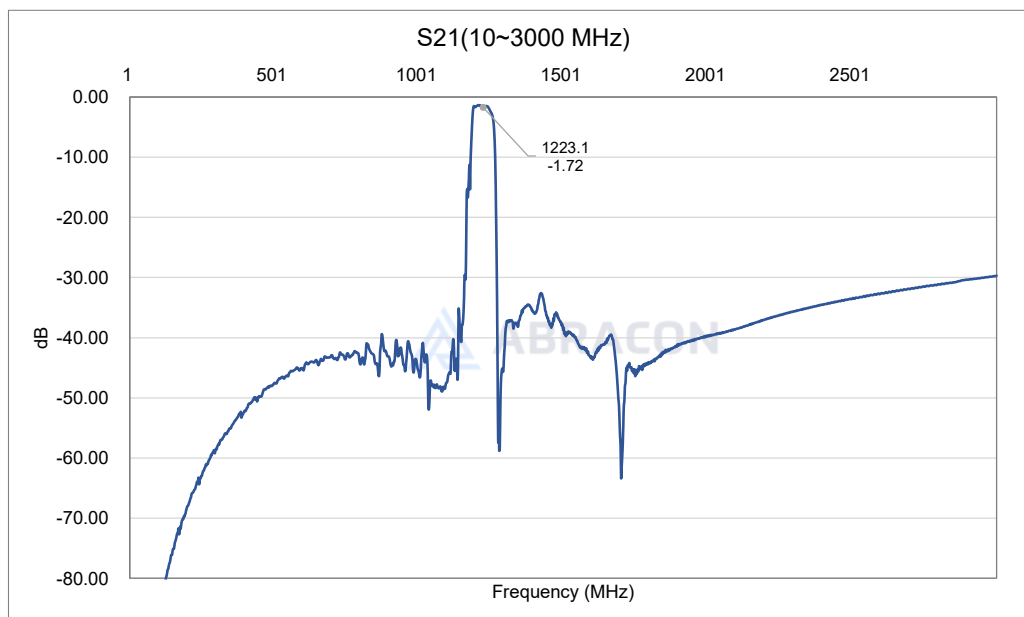

Group Delay

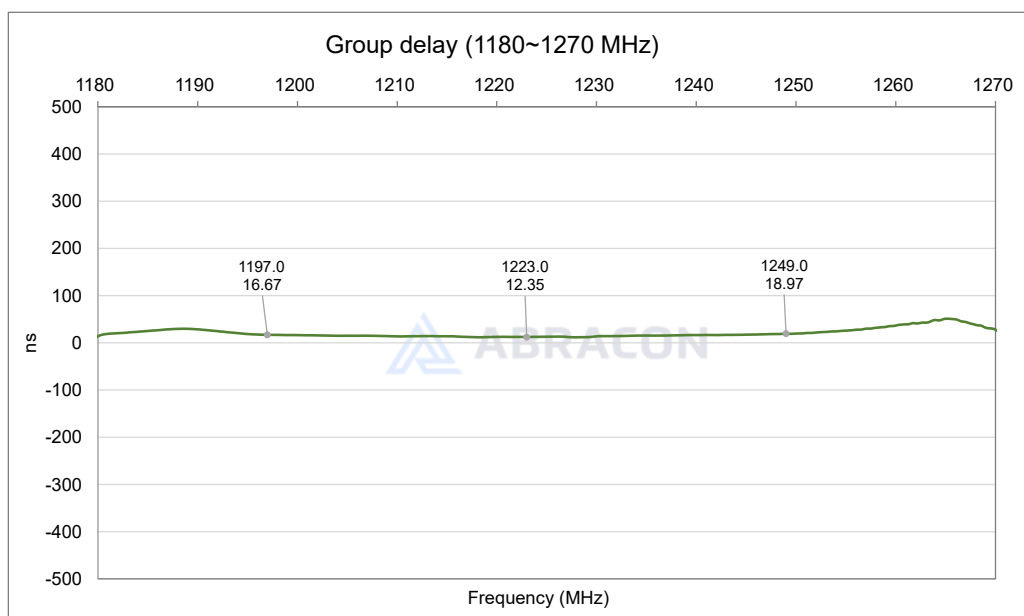

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples





Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

VSWR (S11 & S22)

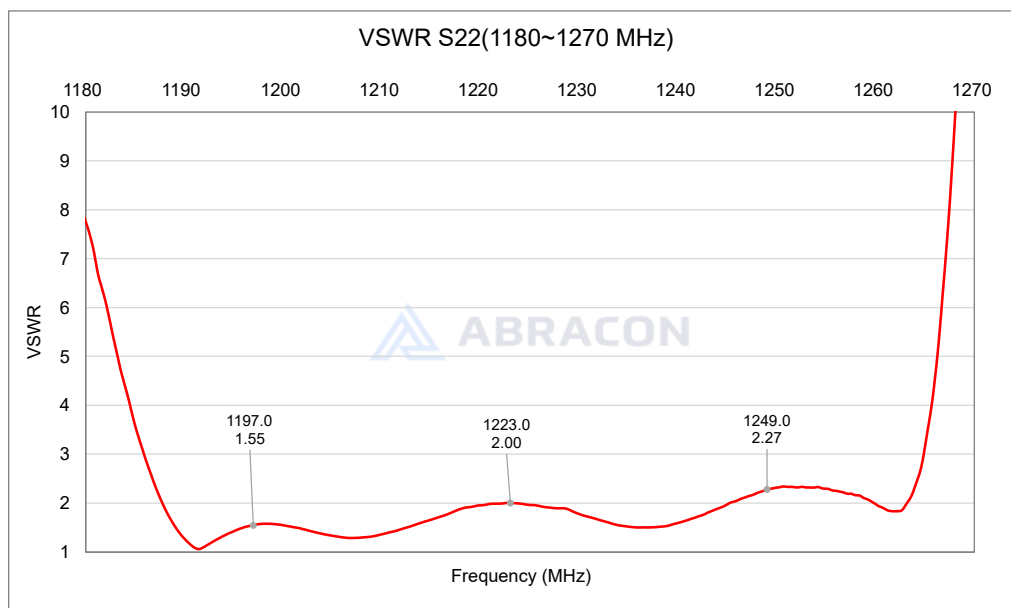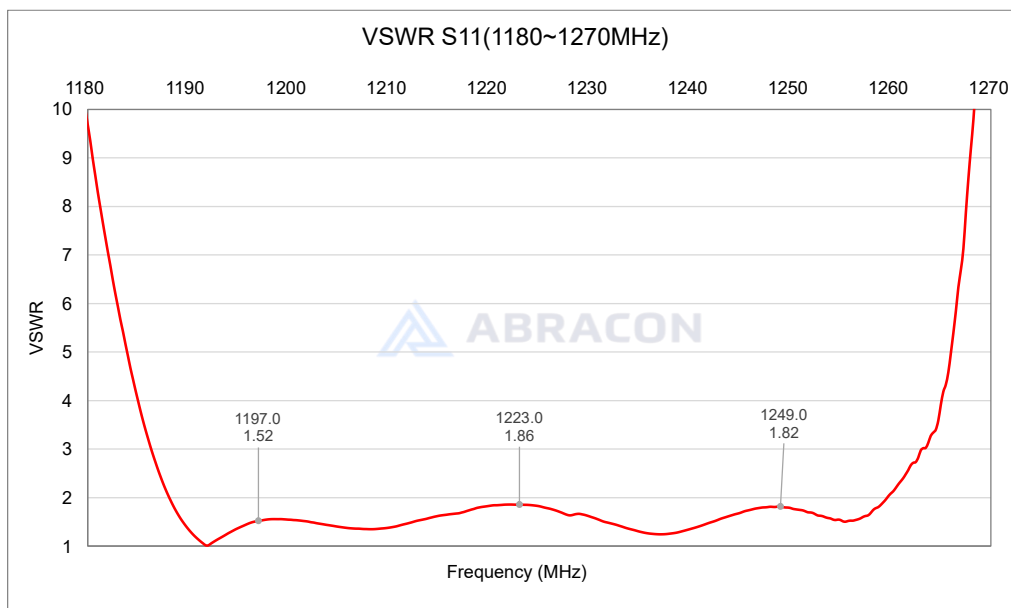

12117 Bee Caves Rd, Bldg-3, Suite 200 Bee
Cave, TX 78738
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 09-16-25

ABRACON IS
ISO9001-2015
CERTIFIED

1223 MHz SMD SAW Filter



ABST5A2-22NM024M

Request Samples




Check Inventory




1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Smith Chart (S11 & S22)

Smith chart S11 (1197~1249MHz)

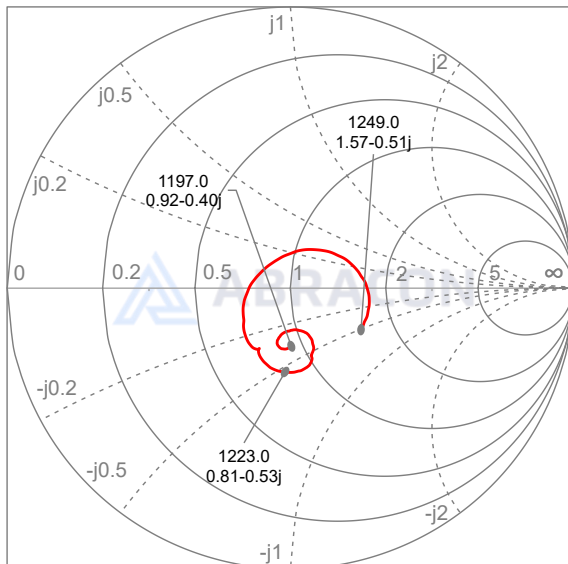

Smith chart S22 (1197~1249MHz)

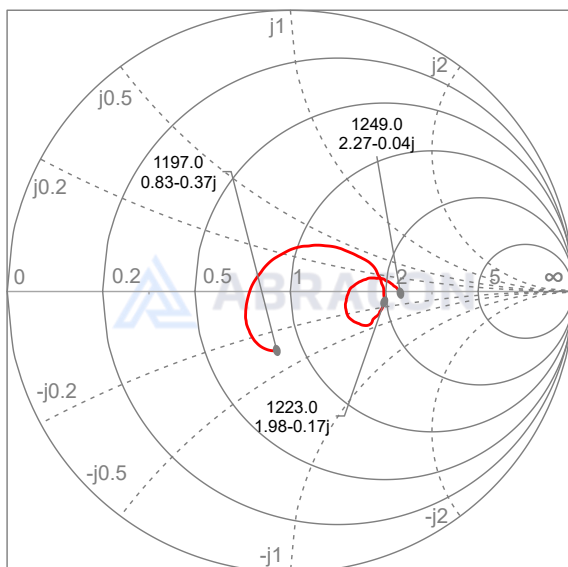

1223 MHz SMD SAW Filter



ABSTS5A2-22NM024M

Request Samples



Check Inventory



1.1 x 0.9 x 0.5 mm
RoHS/RoHS II Compliant
MSL Level = 3

Reflow Profile [JEDEC J-STD-020]

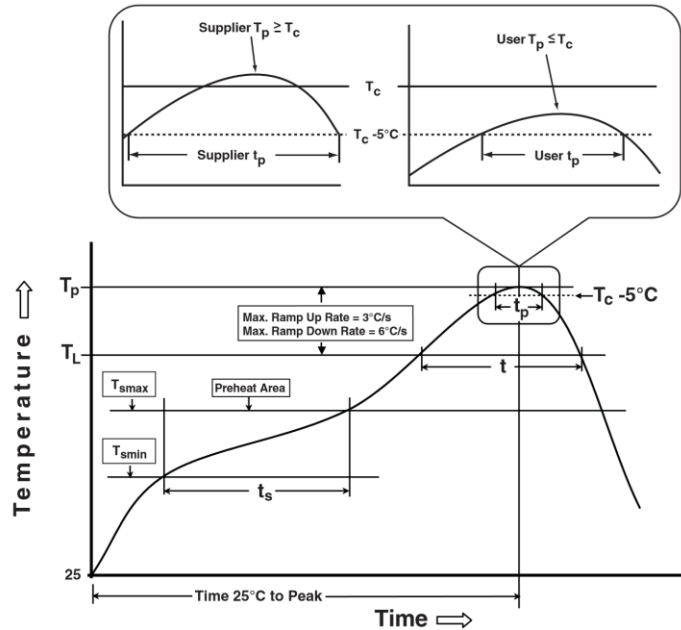


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

Table 2

Pb-Free Process Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260°C	260°C	260°C
1.6mm - 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T _{smmin})	100°C	150°C
Temperature maximum (T _{smmax})	150°C	180°C
Time (T _{smmin} to T _{smmax}) (t _s)	60 – 120 sec.	60 – 90 sec.
Average ramp-up rate (T _{smmax} to T _p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T _L)	183°C	220°C
Time at Liquidous (T _L)	60 – 150 sec.	50 – 80 sec.
Peak package body temperature (T _p)*	See Table 1	See Table 2
Time (T _p)* within 5°C of the specified classification temperature (T _c)	20 sec.	20 ~ 40 sec.
Ramp-down rate (T _p to T _{smmax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max
Reflow cycles	2 max	2 max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [MAPDCC0005](#)
[BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#) [PD0922J5050D2HF](#)
[1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [BD0810J50150AHF](#) [BD1722J50200AHF](#) [TP-101-PIN](#) [T-1000-N](#) [XC0900P-](#)
[10S](#) [XC0900B-30S](#) [11305-10](#) [5962-9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#)
[B39781B8005P810](#) [B39881B8013P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#)
[SF2395E](#) [SF2188D](#) [LFB182G45BG7D948](#) [SF2201E](#) [DC1722J5005AHF](#) [B39272B8818P810](#) [SF2253E](#) [SF2202E](#) [SF2182D](#) [SF2211E](#)
[SF2240E](#) [SF2307D](#)