



40 x 40 mm



RoHS/RoHS II compliant

# NFC Ferrite Antenna (13.56MHz)

ANFCA-4040-A02

## Moisture Sensitivity Level (MSL) – MSL 1

### ► FEATURES:

- Ultra thin flexible antenna structure ( 220+/-46  $\mu\text{m}$ )
- Peel and Stick antenna designs
- Ferrite sheet backing optimizes magnetic fields
- Wide operating temperature range -40°C to +85°C
- Matched to leading NFC controller IC's
- Customized solutions available

### ► APPLICATIONS:

- Mobiles
- NFC Payment readers
- Electronic wallets
- Health care ID scanners
- NFC data loggers transport
- Ticketing systems
- Museum information systems
- Electronic Parking Payments
- Industrial data collection.

### ► STANDARD SPECIFICATIONS:

#### Maximum Ratings

Item	Value
Operating Temperature Range	-40°C to + 85°C
Storage Temperature Range	-40°C to + 85°C

Item	Spec
Operating Frequency (MHz)	13.56
Inductance ( $\mu\text{H}$ )	1.7 $\pm$ 10%
RAC ( $\Omega$ )	1.2 $\pm$ 20%
Test Condition	1 MHz/500mV

Test equipment: TH2828S.

#### Connection to the PCB

While soldering thin wires to the pads on the antenna is possible, great care must be taken, (see manual soldering Section 10.1). However it is recommended to make contact to the antenna pads via Pogo Pins. These are soldered onto the product PCB, and interface mechanically via a pressure contact to the pads on the NFC antenna. Volume applications using the NFC antenna should always use Pogo Pins to make the connections.

#### Product Customization

Products can be customized according to customer requirements. Features such as the dimensions or shape of the coil or its inductance can be customized. Please contact ABRACON or authorized distributor / agent for further details.

# NFC Ferrite Antenna (13.56MHz)

ANFCA-4040-A02




RoHS/RoHS II compliant



40 x 40 mm

## OUTLINE DIMENSIONS:

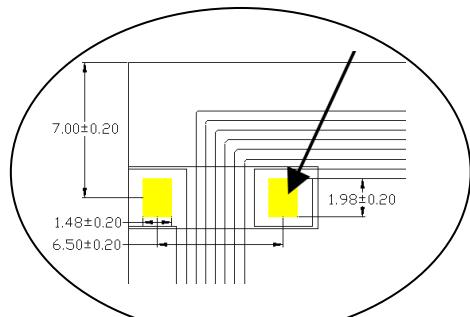

View from rear ferrite side, pads upward

Pad upward

7.00±0.20

1.48±0.20

6.50±0.20

1.98±0.20

40.00±0.20

-40.00±0.20

(Dimensions in mm)

## CONSTRUCTION:

No	Material Name	Thickness (μm)	Thickness (in)
1	PET Tape	10 <sup>+</sup> /-3	0.000393±0.000118
2	Ferrite Sheet	100 <sup>+</sup> /-5	0.00393±0.000196
3	Adhesive Tape	10 <sup>+</sup> /-3	0.000393±0.000118
4	FCP	70 <sup>+</sup> /-30	0.00275±0.000118
5	Adhesive Tape	30 <sup>+</sup> /-5	0.00118±0.000196
6	Release Paper	/	/
Total Thickness		220 <sup>+</sup> /-46	0.00866±0.00181

# NFC Ferrite Antenna (13.56MHz)

ANFCA-4040-A02



RoHS/RoHS II compliant




40 x 40 mm

## ➤ MATCHING CIRCUIT AND REFERENCE VALUES

Component	Value for reference only <sup>(1)</sup>	Notes
L0	560 / 330nH (NXP / Broadcom)	EMC filter resonance at 15.4MHz (NXP) and 20.6MHz (Broadcom).
C0	180pF	EMC filter resonance at 15.4MHz (NXP) and 20.6MHz (Broadcom).
C1	39pF	Antenna matching component, to achieve series resonance at 13.56MHz. (Note: Antenna matching component value may need optimization depending upon antenna environment)
C2 (Includes C2a and C2b values)	82pF	Antenna matching component, to achieve parallel resonance at 15MHz. (Note: Antenna matching component value may need optimization depending upon antenna environment).
Rq	0 Ohm	Damping resistor, the Rq resistor used to lower Q-value if above 35 Ohm, if needed.

Note (1) Values can change depending upon drive circuits, design of the antenna and environment.

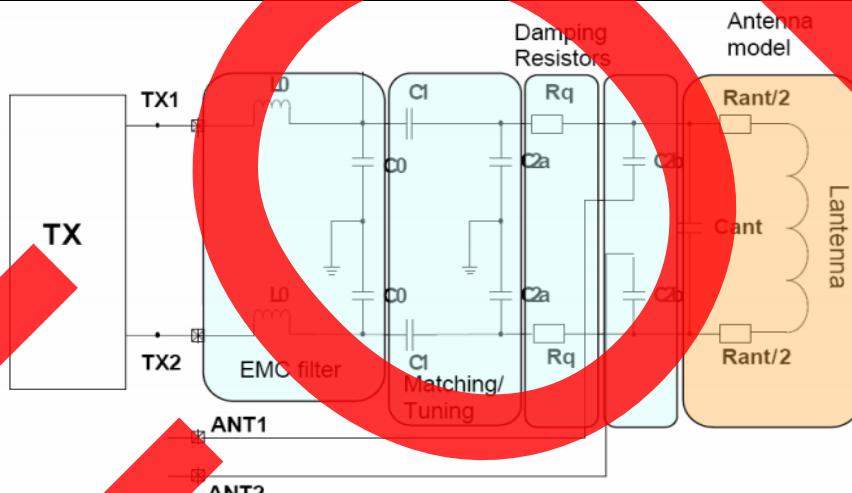

**Reflow Profile:** Not recommended for reflow soldering

**Manual Soldering:** Recommended Soldering iron temperature setting: 330°C, 3 seconds max, 3 times max.

**Packaging:** 100pcs per polyphene bag / box

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Antennas](#) category:***

***Click to view products by [ABRACON manufacturer:](#)***

Other Similar products are found below :

[CCT FM1 ABFT AD-NM-SMAF 001-0021 CTC110 MAF94149 EXE902SF MMCX-SMA-100 PDQ24496-91NF GAN30084EU 930-033-R A08-HABUF-P5I AAF95035 DG-ANT-20DP-BG-B APAMPGJ-141 1513563-1 OF86315-FNF OP24516DS-91NM A09-HASM-7 EXE902MD EXE902SM SPDA17806/2170LAR APAMPG-117 GPS1575SP26-004 GPS15MGSMA CMD69273P-30NF CMQ69273-30NF RD2458-5-OTDR-NM RD2458-5-RSMA TRAB24/49003 W4120ER5000 W6102B0100 YE572113-30RSMM 108-00014-50 SPDA17RP918 OP24516SX-91NM OP24516SX-91RSMM CMQ69273P-30NF CMS69273-30NF CMS69273P-30NF TRAB24003N TRAB24003NP TRAB8213NP TRAB8903 A09-Y8NF A09-Y11NF A09-HSM-7 A09-F8NF-M A09-F5NF-M](#)