


MINI MOLDED POWER INDUCTOR



AOTA-B201610S

Request Samples



Check Inventory



2.0 x 1.6 x 1.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Features

- Shielded construction for minimized EMI emissions
- Low DCR for better efficiency
- High current handling capability
- Compact size that is suitable for high-density designs
- Fit for high-frequency switching applications due to high SRF

Applications

- Consumer electronics and portable devices
- Power electronics such as DC-DC converters, inverters and voltage regulators
- Industrial applications, robotics, signal conditioning, instrumentation and control systems
- IoT devices, smart home, automation systems and wireless sensing

Electrical Specifications

Part Number	Inductance	Tolerance	Self-Resonant Frequency	DC Resistance		Saturation Current		Temperature Rise Current	
	1MHz/1.0V		Min.	Typ	Max	Typ	Max	Typ	Max
Units	μH	%	MHz	$\text{m}\Omega$		A		A	
Symbol	L	M	SRF	DCR		Isat		Irms	
AOTA-B201610SR24MT	0.24	M	120	11	15	7.80	7.00	5.60	5.00
AOTA-B201610SR33MT	0.33	M	110	18	21	7.60	6.80	5.30	4.80
AOTA-B201610SR47MT	0.47	M	72	18	21	6.20	5.60	5.50	4.80
AOTA-B201610SR68MT	0.68	M	68	30	35	5.40	4.80	3.90	3.50
AOTA-B201610S1R0MT	1.00	M	60	34	37	4.50	4.20	4.50	4.20
AOTA-B201610S1R5MT	1.50	M	40	64	74	3.50	3.20	3.20	2.80
AOTA-B201610S2R2MT	2.20	M	30	66	74	2.90	2.60	2.30	2.00
AOTA-B201610S4R7MT	4.70	M	26	213	235	1.90	1.60	1.50	1.30

Test Conditions

Isat: DC current at which the inductance drops 30% from its nominal value.

Irms: DC current that causes the temperature rise (ΔT , approximate 40 °C) from 25°C ambient.


Operating Temperature: -40°C ~ +125°C (including self-temperature rise)

Storage Condition: -40°C ~ +125°C (on board), -10°C ~ +40°C (with packaging) and R.H. 60 max.


AOTA-B201610S Series is **RoHS Compliant and Pb free**.

Part Identification

AOTA-B201610S

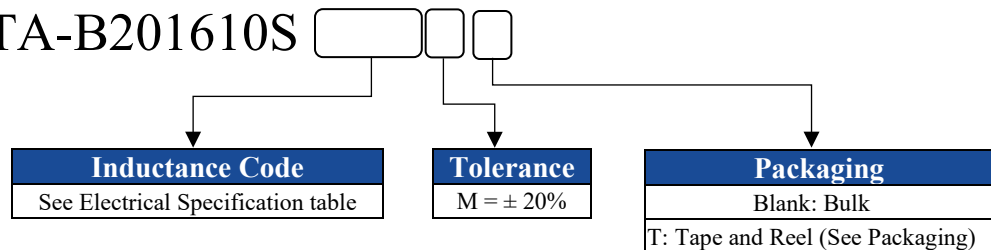

MINI MOLDED POWER INDUCTOR



AOTA-B201610S

Request Samples




Check Inventory



2.0 x 1.6 x 1.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Frequency Performance Graphs

AOTA-B201610S

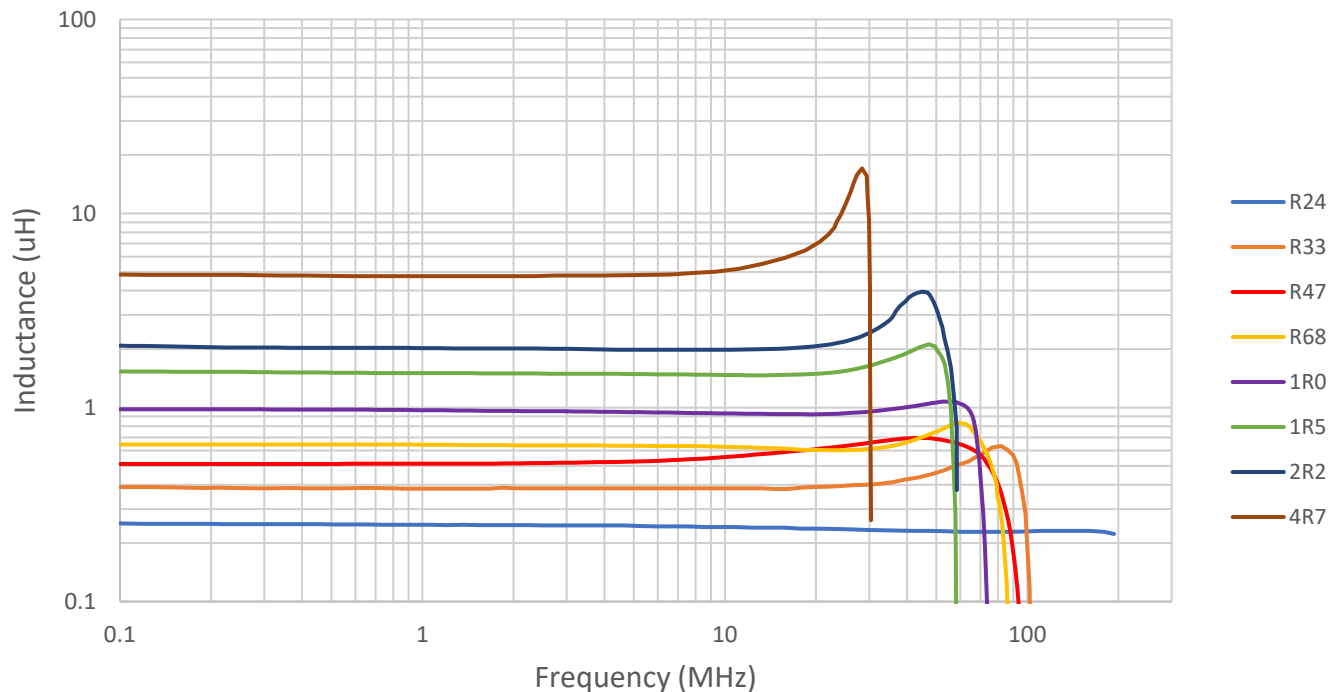

MINI MOLDED POWER INDUCTOR



AOTA-B201610S

Request Samples






Check Inventory




2.0 x 1.6 x 1.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Mechanical Specifications

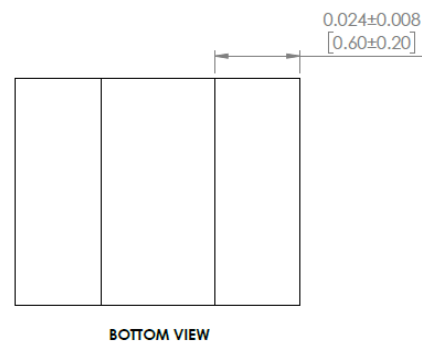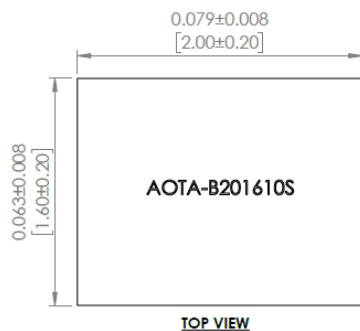

Recommended Land Pattern

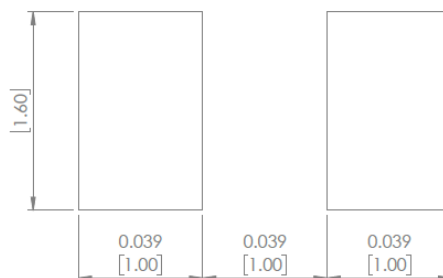

Dimensions: Inch[mm]

Marking

No Marking



5101 Hidden Creek Ln, Spicewood TX 78669
Phone: 512-371-6159 Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISION Initial Release :
7/27/2023

ABRACON IS
ISO9001-2015
CERTIFIED

MINI MOLDED POWER INDUCTOR



AOTA-B201610S

Request Samples




Check Inventory



2.0 x 1.6 x 1.0 mm
RoHS/RoHS II Compliant
MSL Level = 1

Reflow Profile

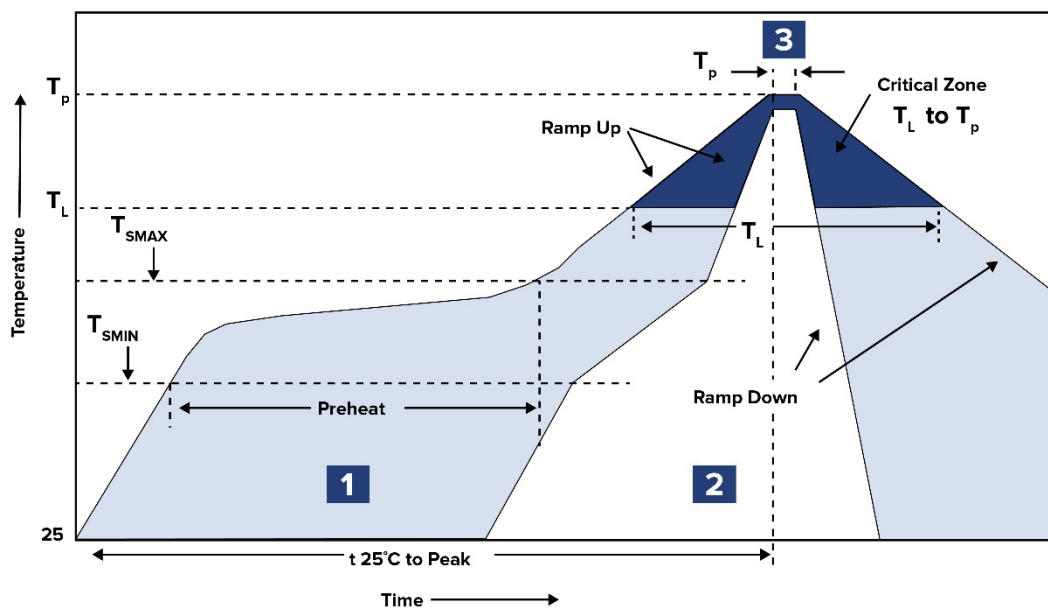

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	T_L 217°C	60 ~ 90 sec.
3	Peak heat	T_P 260°C Max	10 sec. MAX

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Inductors - SMD category](#):

Click to view products by [Abracon manufacturer](#):

Other Similar products are found below :

[LLQPB201214T1R0M](#) [LLXND3030QKT470MNG](#) [LLQPB160807T4R7M](#) [LVS606045-6R8M-N](#) [LVS808040-330M-N](#) [SSL1306T-101M-N](#)
[CDRH8D43RT125NP-680MC](#) [CDRH80D65BT150NP-4R7NC](#) [CDRH70D45BT150NP-101MC](#) [CDRH10D68RT125NP-102PC](#)
[CDRH125L125NP-471MC](#) [CD43NP-1R0MC](#) [CDRH60D45BT150NP-331MC](#) [CDRH104NP-221MC](#) [CDRH5D28RBH125NP-100MC](#)
[CDRH6D38T125NP-330PC](#) [CDRH60D45BT150NP-221MC](#) [CDRR126NP-331MC](#) [CDRH60D45BT150NP-4R7NC](#) [CDRH124NP-331MC](#)
[CD75T125NP-221KC](#) [CDRH70D45BT150NP-471MC](#) [CDRR7D45T125NP-151MC](#) [DEP1016NP-330PB](#) [CDRH6D38T125NP-3R9NC](#)
[CDRH127L125NP-680MC](#) [CD43T125NP-680KC](#) [CDRR7D45T125NP-6R8MC](#) [CD105T125NP-681KC](#) [CDRH8D43RT125NP-5R6NC](#)
[CDRH60D45BT150NP-100MC](#) [0630CDMCDDS-R15MC](#) [CDRCH12D78BNP-220MC](#) [CDRH40D18ANP-4R7NC](#) [CD75T125NP-471KC](#)
[CD105T125NP-101KC](#) [CDRR7D45T125NP-331MC](#) [CDRH80D65BT150NP-101MC](#) [CDRH80D65BT150NP-102MC](#) [CD75T125NP-101KC](#)
[CDRH10D60BT150NP-101MC](#) [CDRH104RT125NP-6R8PC](#) [CD105T125NP-331KC](#) [CDRH104RT125NP-221MC](#) [CDRR7D45T125NP-](#)
[3R3MC](#) [CDRH40D18ANP-220NC](#) [CDRR7D45T125NP-470MC](#) [CDRH70D45BT150NP-100MC](#) [CDRH5D28RBH125NP-101MC](#)
[CDRH80D65BT150NP-471MC](#)