

2500 MHz 2-WAY RF POWER DIVIDER

APDD-RF-0002

Features

- Usable Bandwidth of 400 MHz
- Compact Package Size
- Low Insertion Loss

Applications

- WLAN, Bluetooth, LNB
- Turning circuit
- Mobile Applications

Electrical Specifications

Parameters	Specifications		
	Min	Typ	Max
Nominal Center Frequency (Fc) (MHz)	-	2500	
Frequency Range	2300	2500	2700
Insertion Loss (3dB)	-	±1.2	
Isolation(min) (dB)	-	≥17	
Input VSWR (in BW)	-	≤ 1.8	
Output VSWR (in BW)	-	≤ 1.8	
Phase Difference	-	≤ 6°	
Amplitude Difference	-	≤ 1.0	
In/Output Imped(Ω)		50	
Maximum Input Power (dBm)		33	

Mechanical Specifications

Parameters	Specifications
Filter Dimension	3.2 x 1.6 x 0.9 mm
Mounting Type	SMD Mount

Environmental Specifications


Parameters	Specifications
Operating Temperature Range	-55°C ~ +105°C
Storage Temperature Range	-55°C ~ +105°C
RoHS Compliant	Yes
ESD Sensitive	Yes

2500 MHz 2-WAY RF POWER DIVIDER


APDD-RF-0002

Package Dimensions

Dimensions (Unit: mm)

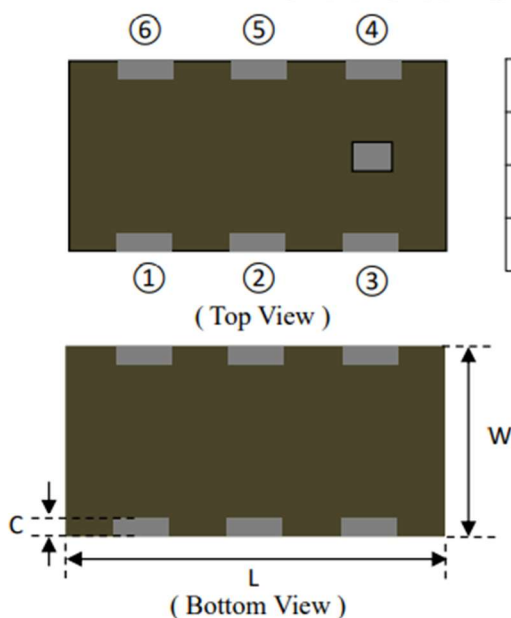


Number	Terminal Name	Number	Terminal Name
①	GND	④	RF out 1
②	RF In	⑤	GND
③	GND	⑥	RF out 2

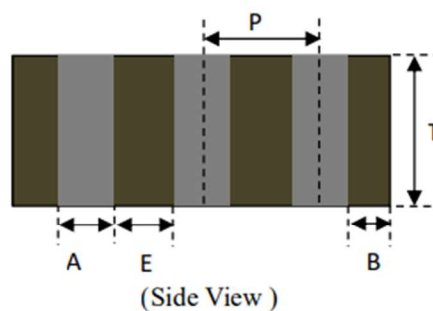

Symbols	L	W	T	A	B	C	E	P
Dimensions	3.2+/-0.1	1.6+/-0.1	0.9+/-0.1	0.56+/-0.1	0.33+/-0.1	0.3+/-0.1	0.43+/-0.1	0.99+/-0.1

External Electrical Schematic

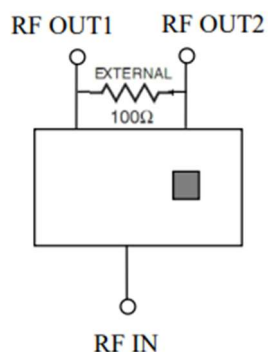


2500 MHz 2-WAY RF POWER DIVIDER

APDD-RF-0002

Footprint

Unit: mm

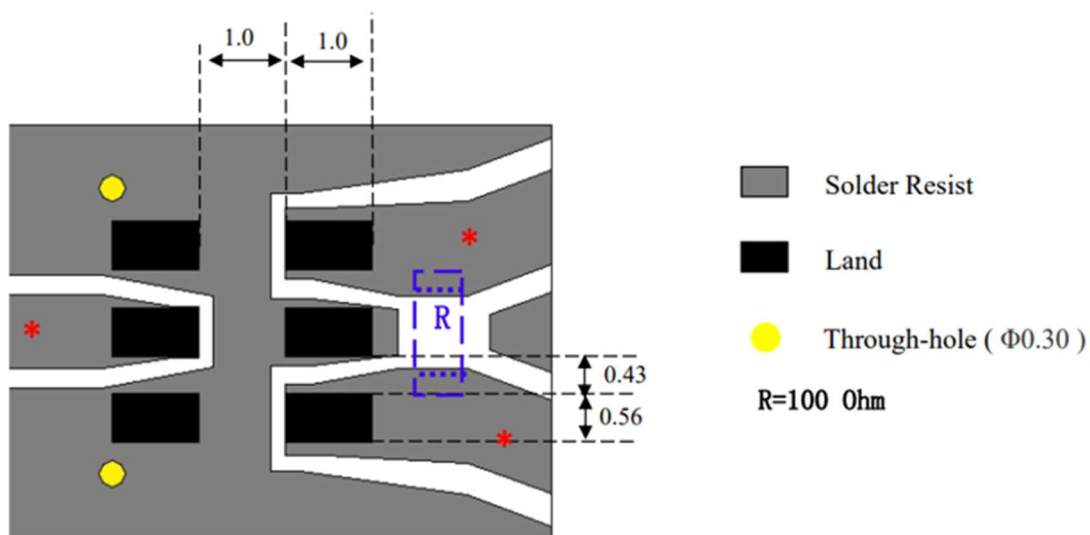


- * Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

2500 MHz 2-WAY RF POWER DIVIDER


APDD-RF-0002

Transmission Characteristics

Isolation S12(2300-2700MHz)


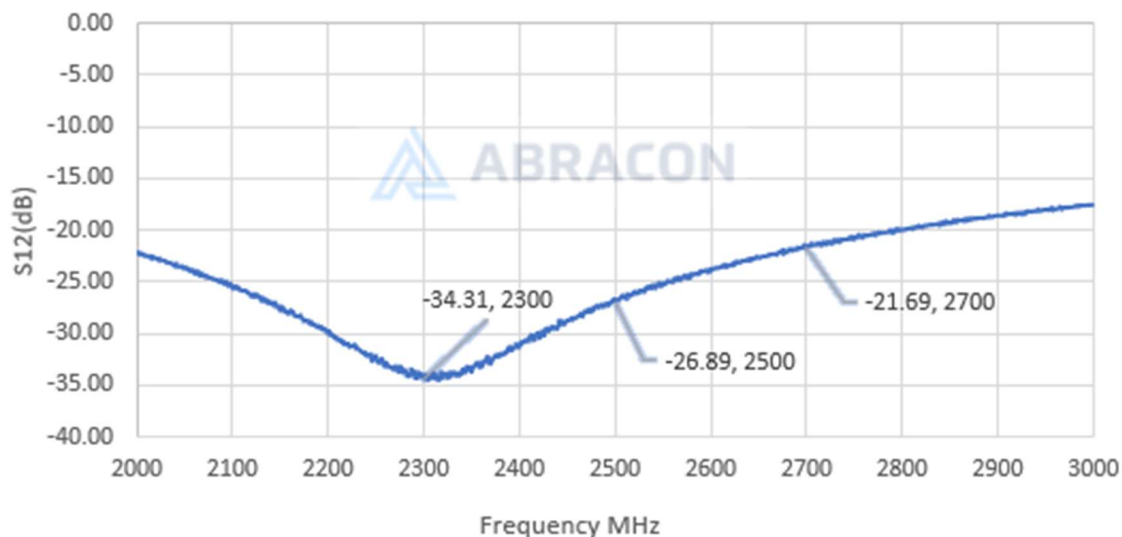


Insertion Loss (2300-2700MHz)

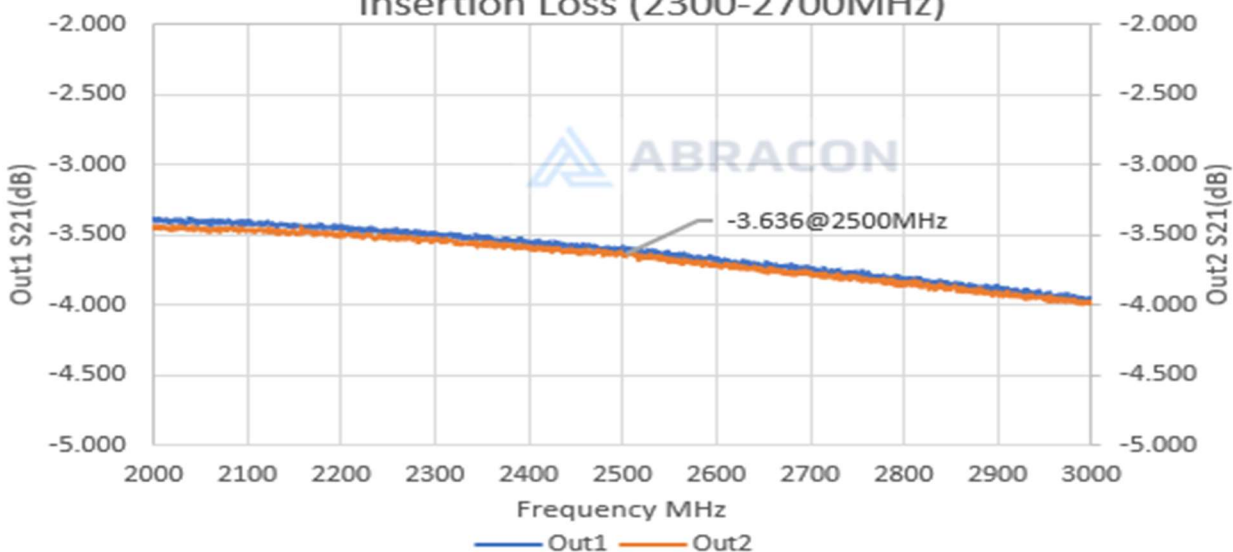

2500 MHz 2-WAY RF POWER DIVIDER


APDD-RF-0002

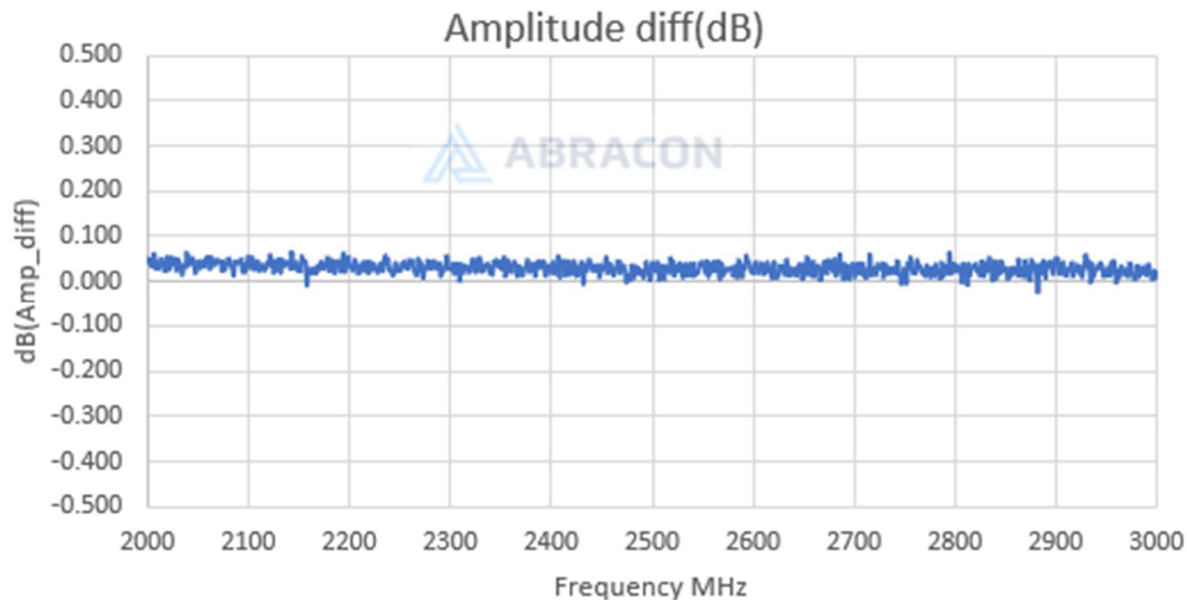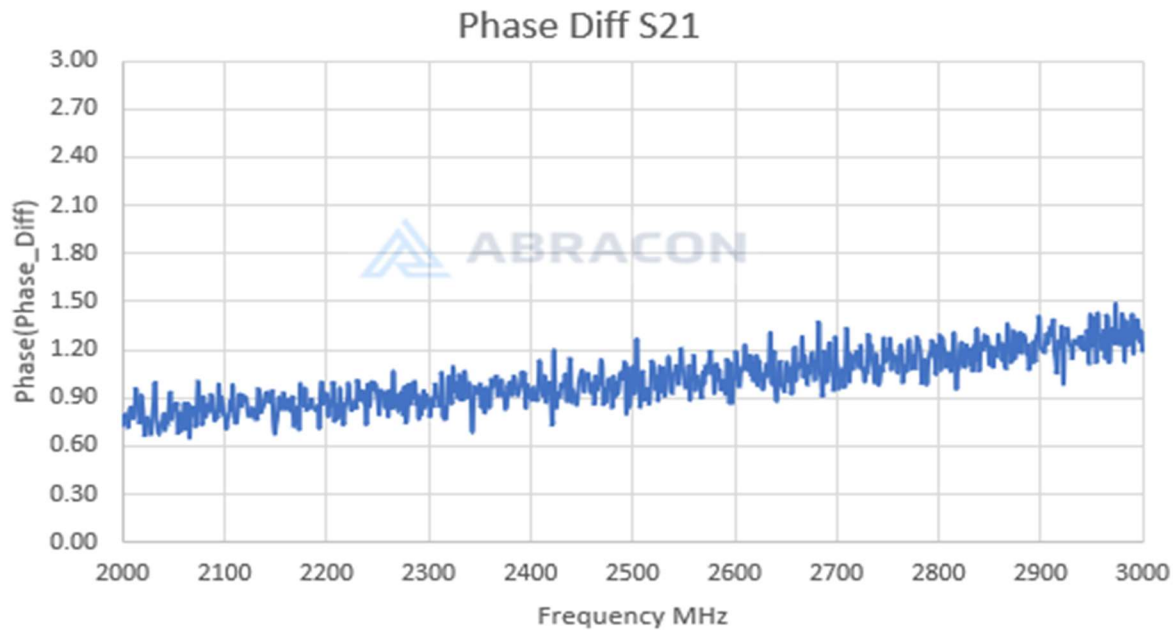


2500 MHz 2-WAY RF POWER DIVIDER

APDD-RF-0002

VSWR_S11(2300-2700MHz)

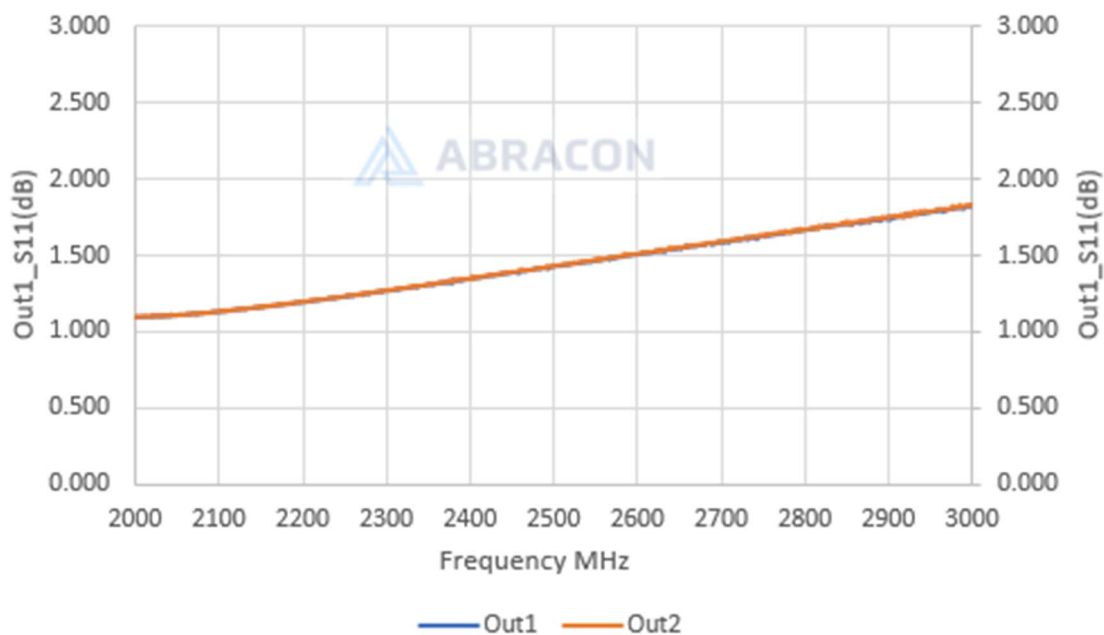


VSWR_S22(2300-2700MHz)

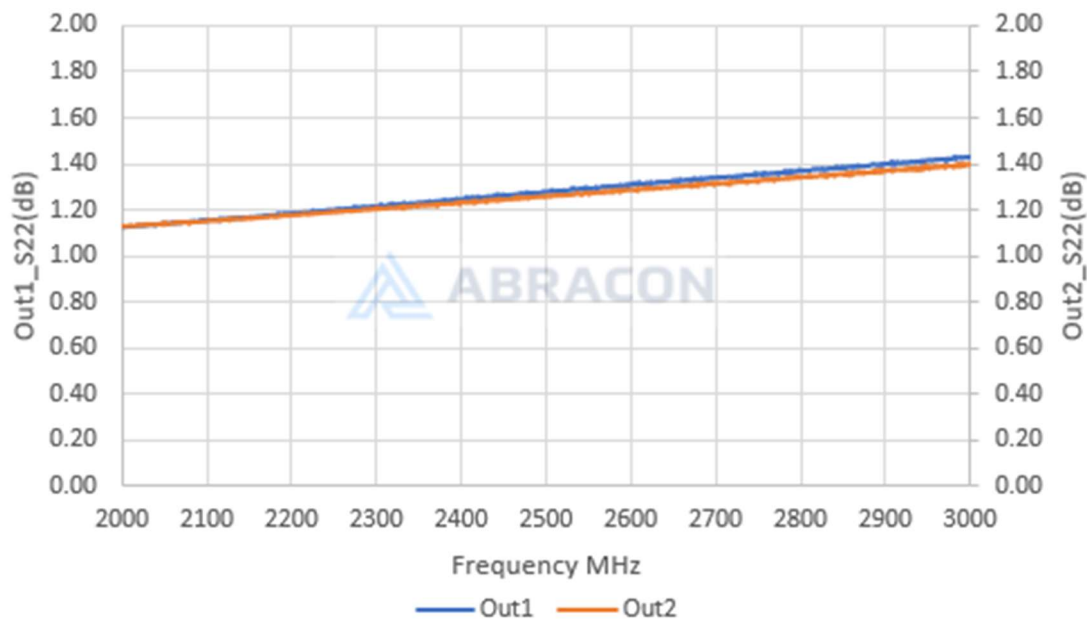

2500 MHz 2-WAY RF POWER DIVIDER

APDD-RF-0002

Recommended Reflow Profile

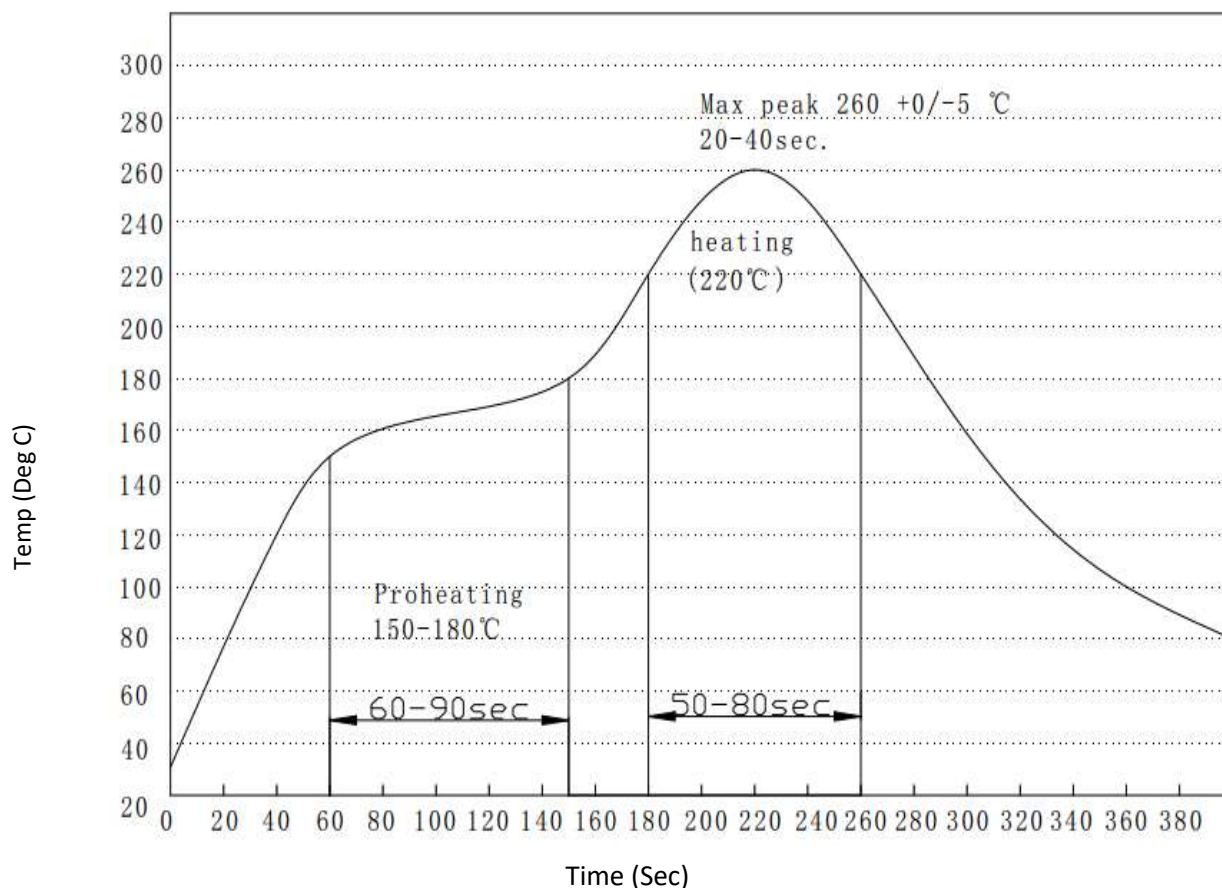

1. Preheating shall be fixed at 150~180°C for 60~90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50~80 seconds and at 260°C +0/-5°C peak (20~40sec).
4. Time: 2 times.

2500 MHz 2-WAY RF POWER DIVIDER

APDD-RF-0002


Packaging

Packaging Type: Reel and Tape

Pieces per Reel: 3000



Reel Dimension

Unit: mm

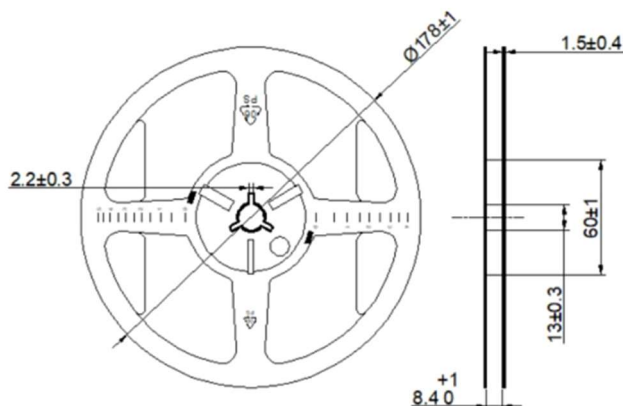

Tape Dimension

ESD EMBOSSED Tape (Unit: mm)

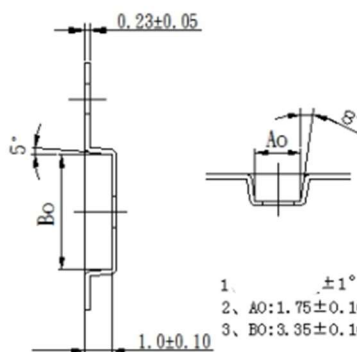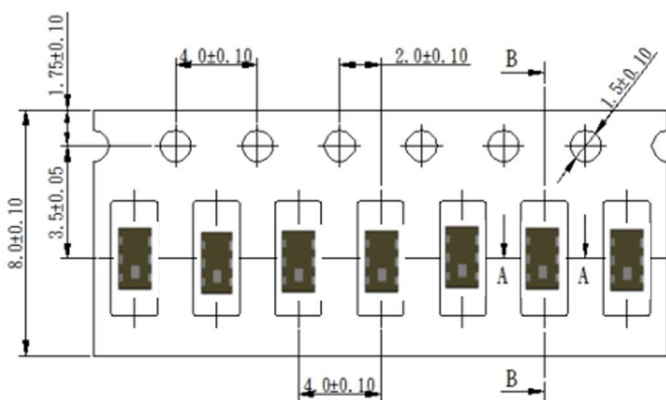

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 10-12-23

ABRACON IS
ISO9001-2015
CERTIFIED

2500 MHz 2-WAY RF POWER DIVIDER

APDD-RF-0002

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[PD0409J5050S2HF](#) [AFS14A35-1591.50-T3](#) [AFS20A20-1227.60-T3](#) [JP510S](#) [LFB322G45SN1A504](#) [SF2159E](#) [FM-104-PIN](#) [CER0813B](#)
[MAPDCC0005](#) [3A325](#) [BD0810N50100AHF](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [X3C19F1-20S](#) [XC3500P-20S](#) [CDBLB455KCAX39-B0](#)
[PD0922J5050D2HF](#) [600S150FTRB](#) [1E1305-3](#) [1F1304-3S](#) [BD1222J50200AHF](#) [BD1722J50100AHF](#) [2450DP39K5400E](#) [BD0810J50150AHF](#)
[BD1722J50200AHF](#) [DS-329-PIN](#) [TP-104-PIN](#) [TP-101-PIN](#) [HH-128-PIN](#) [T-1000-N](#) [JP506S](#) [XC0900P-10S](#) [XC0900B-30S](#) [11305-10](#) [5962-](#)
[9091202MXA](#) [X3C06A4-03S](#) [DSS-333-PIN](#) [PD2425J5050S2HF](#) [B39242B4360P810](#) [B39781B8005P810](#) [B39881B8013P810](#)
[B39791B8039P810](#) [B39771B8035P810](#) [B39741B8012P810](#) [B39212B8033P810](#) [B39162B8636P810](#) [SF2225E](#) [SF2275E](#) [SF2395E](#) [SF2188D](#)