

CONTINUOUS VOLTAGE SMD TCXO

ATX-13

Request Samples



Check Inventory



ESD Sensitive



2.0 x 1.6 x 0.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Features

- Both continuous & fixed Vdd options available
- Output waveform clipped sinewave
- Hermetically seam-sealed ceramic package
- Low current consumption

Applications

- Cellular and cordless phones
- Standard oscillator for exact equipment
- Consumer electronics
- Industrial control & automation
- Mobile communication

Electrical Specifications [Note 1]

Parameters	Min.	Typ.	Max.	Units	Notes
Frequency Range	10		52	MHz	
Standard Frequencies	26, 38.4, 50, 52			MHz	
Operating Temperature	-40		+85	°C	See Options (Table 1)
Storage Temperature	-40		+85	°C	
Frequency Stability $\Delta f/f_o$ vs:					
Tolerance	-1.0		+1.0	ppm	Reference to f_o , at 25°C±2°C, Pre-reflow
Tolerance	-2.0		+2.0		Reference to f_o , at 25°C ±2°C, 24 hours after reflow, two times
Temperature	-2.5		+2.5		See Options (Table 1)
Supply Voltage Change	-0.2		+0.2		Reference to f_o , at 25°C ±2°C
Load Change	-0.2		+0.2		Vdd ± 5%
Aging	-1.0		+1.0		CL ± 1kΩ//±1pF
Supply Voltage (Vdd)	+3.135	+3.3	+3.465	V	First year @+25°C±2°C
	+2.85	+3.0	+3.15		Option E
	+2.66	+2.8	+2.94		Option A
	+2.375	+2.5	+2.625		Option B
	+1.71	+1.8	+1.89		Option C
	+1.68		+3.63		Option D
Supply Current (Idd)			2.0	mA	Option F
			2.5		10.00MHz to 26.00 MHz
Start-up Time			2.0	ms	26.01MHz to 52.00MHz
Output Voltage	0.8			Vp-p	
Output Load	9	10	11	kΩ	
	9	10	11	pF	
Output Waveform	Clipped Sine Wave, External DC-Cut Capacitor Required				1000 pF recommended
Phase Noise (@ 10 MHz Carrier, @ 25°C ±2°C)					
@10Hz offset		-100	-96	dBc/Hz	Applicable to all standard available frequencies with Vdd = +1.8V, +2.5, +2.8, +3.0V, +3.3V
@100Hz offset		-125	-121		
@1kHz offset		-138	-134		
@10kHz offset		-149	-146		
@100kHz offset		-158	-155		
@1MHz offset		-159	-156		
@5MHz offset		-159	-156		
Phase Noise (@ 52 MHz Carrier, @ 25°C ±2°C)					
@10Hz offset		-83	-79	dBc/Hz	Applicable to all standard available frequencies with Vdd = +1.8V, +2.5, +2.8, +3.0V, +3.3V
@100Hz offset		-110	-106		
@1kHz offset		-132	-128		
@10kHz offset		-149	-146		
@100kHz offset		-156	-153		
@1MHz offset		-157	-154		
@10MHz offset		-157	-154		
@20MHz offset		-158	-155		

Note 1: All measurements made at 25°C ±2°C, nominal Vdd, unless otherwise specified



5101 Hidden Creek Ln Spicewood TX 78669
Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11-11-20

ABRACON IS
ISO9001-2015
CERTIFIED

CONTINUOUS VOLTAGE SMD TCXO

ATX-13

Request Samples



Check Inventory



ESD Sensitive



2.0 x 1.6 x 0.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Part Identification

ATX-13-- MHz--

Vdd (V)
A: 3.0V±5%
B: 2.8V±5%
C: 2.5V±5%
D: 1.8V±5%
E: 3.3V±5%
F: +1.68V ~ +3.63V


Frequency in MHz
Please specify the frequency in MHz. e.g. 26.000MHz

Packaging
Blank: Bulk
T: 1000pcs/reel
T3: 3000pcs/reel

Table 1: Frequency Stability vs Operating Temperature

	±0.5ppm	±1.0ppm	±1.5ppm	±2.0ppm	±2.5ppm
0°C ~ +70°C	A05	A10	A15	A20	A25
-10°C ~ +60°C	B05	B10	B15	B20	B25
-20°C ~ +70°C	C05	C10	C15	C20	C25
-30°C ~ +75°C	D05	D10	D15	D20	D25
-30°C ~ +85°C	E05	E10	E15	E20	E25
-40°C ~ +85°C	F05	F10	F15	F20	F25

Recommended Test Circuit

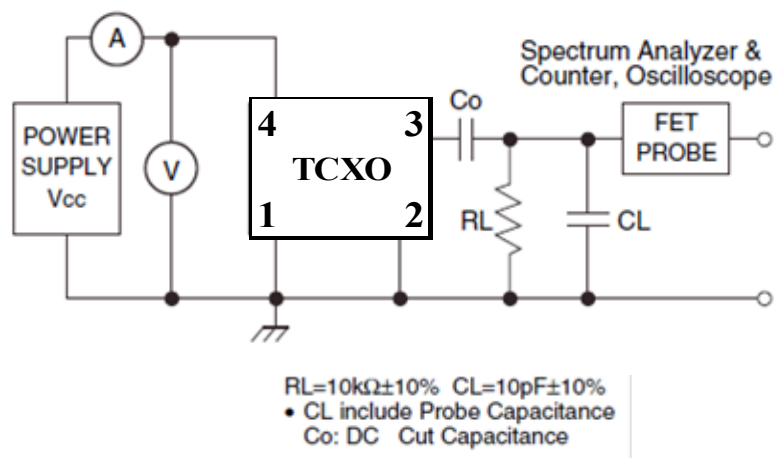

CONTINUOUS VOLTAGE SMD TCXO

ATX-13

Request Samples



Check Inventory




ESD Sensitive




2.0 x 1.6 x 0.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Mechanical Dimensions

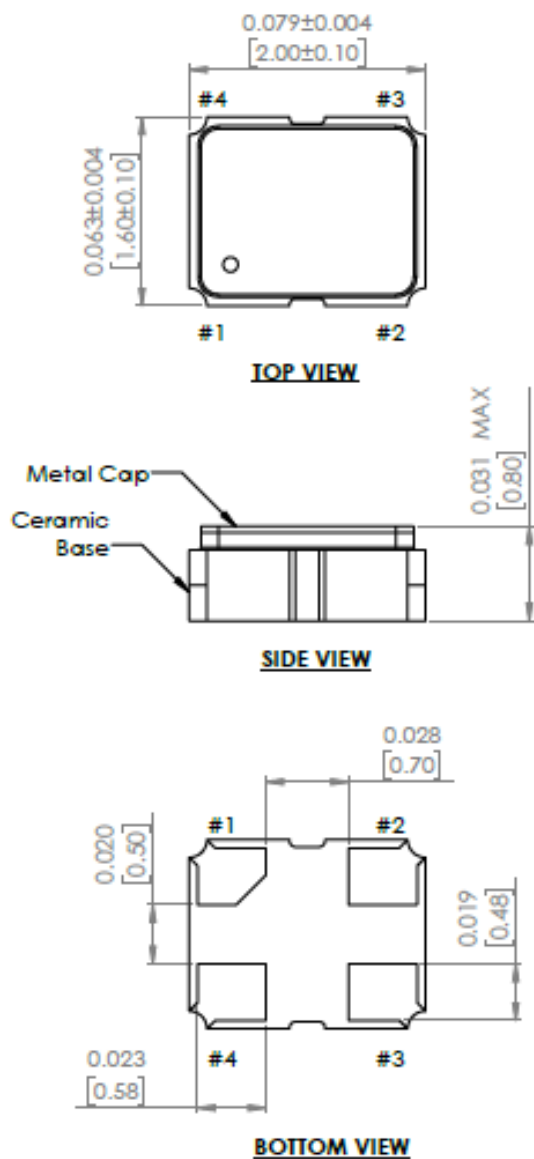

Recommended Land Pattern

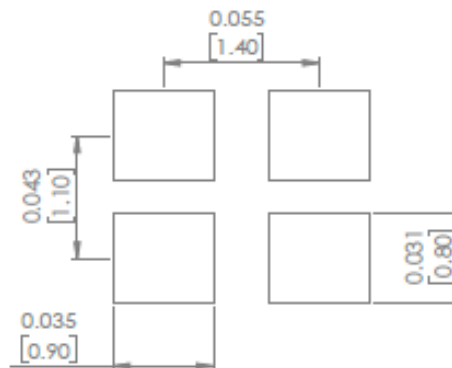

Pin #	Function
1	GND
2	GND
3	Output
4	Vdd

Dimensions: inches (mm)

CONTINUOUS VOLTAGE SMD TCXO

ATX-13

Request Samples



Check Inventory



ESD Sensitive



2.0 x 1.6 x 0.8 mm
RoHS/RoHS II Compliant
MSL Level = 1

Reflow Profile [JDEC J-STD-020]

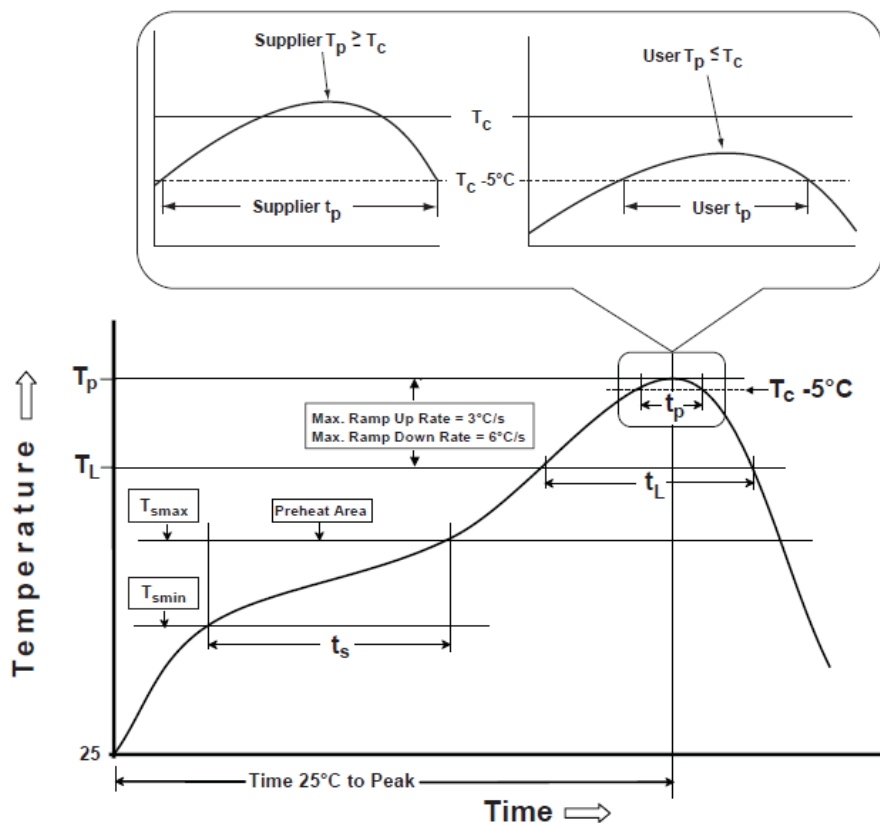


Table 1

SnPb Eutectic Process Classification Temperatures (T_c)		
Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2

Pb-Free Process Classification Temperatures (T_c)			
Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
>2.5 mm	250 °C	245 °C	245 °C

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat / soak		
Temperature minimum (T_{smin})	100°C	150°C
Temperature maximum (T_{smax})	150°C	200°C
Time (T_{smin} to T_{smax}) (t_s)	60 - 120 sec.	60 - 120 sec.
Average ramp-up rate (T_{smax} to T_p)	3°C/sec. max	3°C/sec. max
Liquidous temperature (T_L)	183°C	217°C
Time at liquidous (t_L)	60 - 150 sec.	60 - 150 sec.
Peak package body temperature (T_p)*	see Table 1	see Table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20 sec.	30 sec.
Ramp-down rate (T_p to T_{smax})	6°C/sec. max	6°C/sec. max
Time 25°C to peak temperature	6 min. max	8 min. max

*Tolerance for peak profile temperature (T_p) is defined as a supplier minimum and a user maximum.

**Tolerance for time at peak profile temperature (t_p) is defined as supplier minimum and a user maximum.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[SIT5000ACC8E-33VQ-19.200000X](#) [SiT5001AI-2E-33N0-48.000000X](#) [TG3225CEN 25.0000M-KFGNNAB](#) [SIT5001AI-2E-33N0-24.000000x](#)
[SIT1566AC-JV-18E-32.768E](#) [KT1612A26000AAW18NBL](#) [X1G005421031215](#) [TX0408CB](#) [NT1220HH3I106EN100](#)
[NT1220HS3I106EN100](#) [NT1220HS3I507EN100](#) [BT0507BC3I507CN27](#) [SIT5146AI-FA-33N0A40.000000F](#) [SiT9551AI-02B1A3310-](#)
[312.500000](#) [NT1220HH3I507EN100](#) [BT0914AD3C507DN100](#) [BT0914AD3C106DN100](#) [9132S-26.000N30FT1XL](#) [8132S-10.000MN18DTL](#)
[8153S-26.000NL33DTL](#) [9175S-10.000K33FT1JL](#) [SX2T25.000B010J020S](#) [ATXAIG-H13-F-26.000MHZ-F25-T3](#) [ATX-13-D-26.000MHZ-](#)
[E05-T3](#) [LFPTXO000291](#) [LFTCXO073006](#) [SIT5356AI-FQ-33E0-25.000000X](#) [SIT5357AI-FQ-33N0-100.000000X](#) [ECS-TXO-2520-33-120-](#)
[AN-TR](#) [SiT5000AICGE-33E0-25.000000X](#) [SiT1568AI-JE-DCC-32.768E](#) [AST3TQ-T-20.000MHz-28](#) [AST3TQ-T-25.000MHz-28](#)
[SiT1552AC-JE-DCC-32.768D](#) [AST3TQ-V-30.720MHz-28](#) [AST3TQ-T-30.720MHz-28](#) [AST3TQ-T-40.000MHz-28](#) [ABDFTCXO-](#)
[20.000MHz-L-2-CT](#) [718-24-15](#) [AST3TQ-10.00MHz-2](#) [AST3TQ-19.20MHz-5](#) [AST3TQ-25.00MHz-5](#) [ASGTX-D-100.000MHz-1](#) [ASGTX-D-](#)
[106.250MHz-1](#) [ASGTX-P-1.500GHz-1](#) [AST3TDA-0000-T5](#) [AST3TDA53TACJ2-19.2000MHz](#) [AST3TDATAACJ5-20.0000MHz](#) [AST3TQ53-](#)
[T-10.000MHz-5-C](#) [AST3TQ53-T-20.000MHz-5-C](#)