

AVR-1F060605S

Request Samples



Check Inventory



5.5 x 5.7 x 4.6 mm
RoHS/RoHS II Compliant
 MSL Level = 1

Features

- Shielded construction
- Soft saturation material
- High Power Density
- Low DCR, High Efficiency
- Perfect for Multi-Phased power circuitry

Applications

- Desktop/ Server applications
- High current point-of-load (POL) converters
- Lighting
- Solar inverters and power
- Industrial and robotics
- Medium and high-power switch mode power supplies.

Electrical Specifications

Part Number	Inductance	Tolerance	DC Resistance	Saturation Current (Typ)		Temperature Rise Current
	0.1MHz/1.0V		Max	@25°C	@100°C	Typ.
Units	nH	%	mΩ ±10%	A		A
Symbol	L		DCR	Isat		Irms
AVR-1F060605S55NL	55	±15%	0.20	63	46	34

Test Conditions

Isat: DC current at which the inductance drops 30% from its value without current.

Irms: DC current that causes the temperature rise (ΔT , approximate 40 °C) from 20°C ambient


Operating Temperature: -45°C ~ +125°C (including self-temperature rise)


Storage Condition: -40°C ~ +125°C (with packaging) and R.H. <95% max

Operating Voltage: 40V (across inductor)

AVR-1F060605S Series is **RoHS Compliant and Pb free**

Part Identification

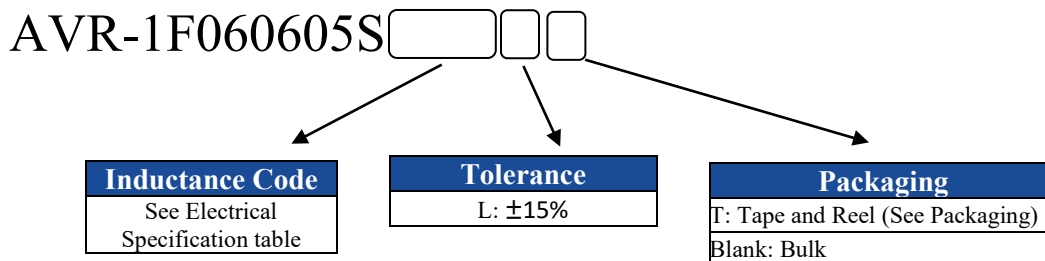



AVR-1F060605S

Request Samples




Check Inventory




5.5 x 5.7 x 4.6 mm
RoHS/RoHS II Compliant
MSL Level = 1

Mechanical Specifications

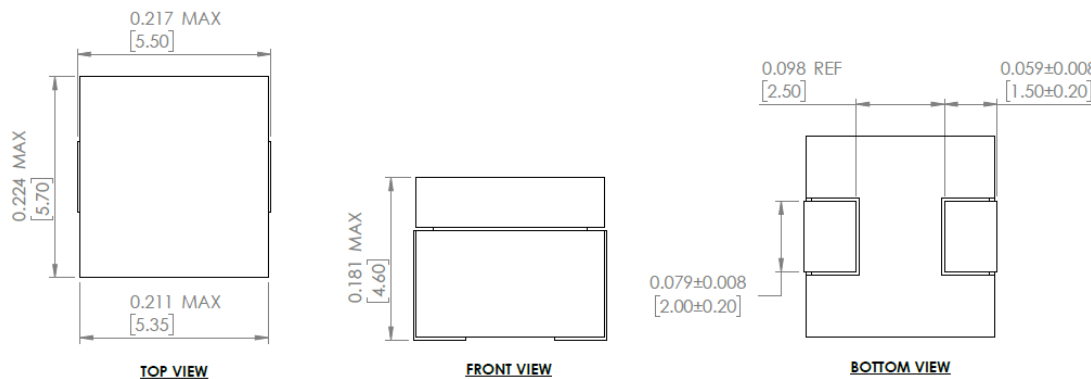


Dimensions: Inches [mm]

Recommended Land Pattern

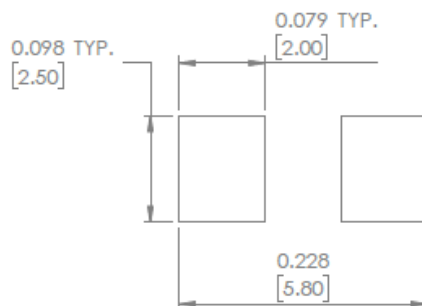

Dimensions: Inches [mm]



AVR-1F060605S

Request Samples




Check Inventory



5.5 x 5.7 x 4.6 mm
RoHS/RoHS II Compliant
MSL Level = 1

Reflow Profile

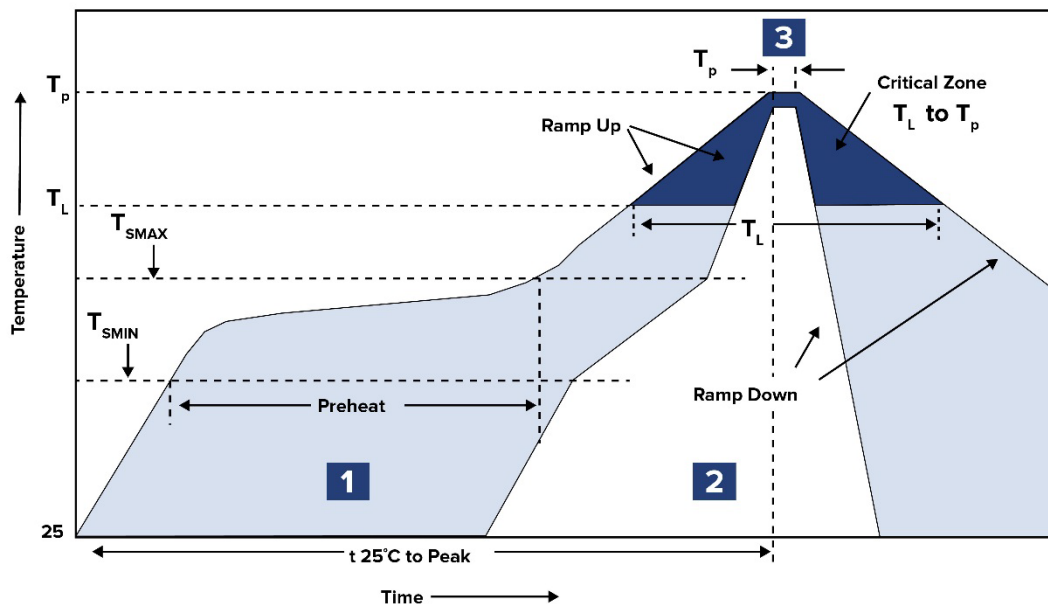

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 120 sec.
2	Reflow	T_L 217°C	60 ~ 150 sec.
3	Peak heat	T_P 260°C	5 sec. MAX

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Inductors - SMD](#) *category:*

Click to view products by [Abracon](#) *manufacturer:*

Other Similar products are found below :

[0320CDMCCDS-2R2MC](#) [0402DF-560XJRW](#) [0402DF-591XJRW](#) [0412CDMCCDS-R10MC](#) [0412CDMCCDS-R12MC](#) [0412CDMCCDS-R15MC](#) [0412CDMCCDS-R22MC](#) [0420CDMCCDS-1R2MC](#) [0420CDMCCDS-R56MC](#) [0518CDMCCDS-R10MC](#) [0518CDMCCDS-R12MC](#) [0518CDMCCDS-R15MC](#) [0518CDMCCDS-R68MC](#) [0530CDMCCDS-5R6MC](#) [0530CDMCCDS-R10MC](#) [0530CDMCCDS-R33MC](#) [0618CDMCCDS-R10MC](#) [0618CDMCCDS-R12MC](#) [0618CDMCCDS-R15MC](#) [0624CDMCCDS-3R3MC](#) [0624CDMCCDS-R10MC](#) [0624CDMCCDS-R12MC](#) [0630CDMCCDS-330MC](#) [0630CDMCCDS-R10MC](#) [0630CDMCCDS-R15MC](#) [0630CDMCCDS-R22MC](#) [0630CDMCDDS-R15MC](#) [0630CDMCDDS-R20MC](#) [0830CDMCCDS-R82MC](#) [0840CDMCCDS-1R5MC](#) [1-2176738-6](#) [1-2176738-9](#) [1616FP-1R0M-01](#) [1616FP-1R5M-01](#) [1616FP-2R2M-01](#) [1616FP-3R3M-01](#) [1616FP-4R7M-01](#) [201610CDMCDDS-1R0MC](#) [201610CDMCDDS-R24MC](#) [201610CDMCDDS-R47MC](#) [201610CDMCDDS-R68MC](#) [2176780-1](#) [2-2176738-2](#) [2-2176738-8](#) [252010CDMCDDS-R47MC](#) [30900DC](#) [3-1879388-0](#) [3-2176738-1](#) [3627322515100K](#) [36273225151R5N](#)