








APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/22/24	

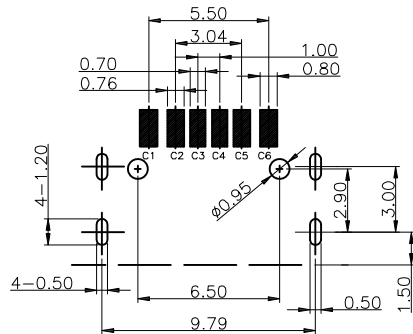

RECOMMENDED PCB LAYOUT

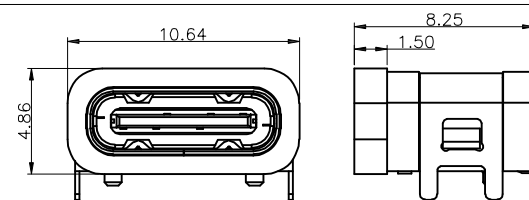

Note: O-ring to be assembled onto part after IR Reflow process.

PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0

Insulator color: Black

Run-Ring: Silica gel, Color: Black

Contacts: Copper Alloy

Shield: Stainless Steel, Nickel Plated

Plating:

Gold flash over Nickel underplate overall

Electrical:

Voltage rating: 30 VAC

Current rating: 3.0A Max

Contact resistance: 40 mohms max

Insulation resistance: 100 Mohms min

Mechanical:

Insertion Force: 5N~20N

Removal Force: 8N~20N

Durability: 10,000 Cycles

Temperature Rating:

Operating temperature: -30°C to +85°C

Environmental:

Waterproof: IPX7

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
.X ± .35	X ± 3°
.XX ± .25	.X ± 1.5°

DRAWN	WX	1/22/24
CHECKED	RC	1/22/24
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

TRANSMISSION EFFICIENCY: 480M



909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE UNIVERSAL SERIAL BUS TYPE C 2.0 6PIN, R/A
SMT, WATERPROOF IPX7, BLACK INSULATOR
POWER PIN ONLY TYPE

SIZE	PART NO.	REV.
X	USB-C20-S-RA-CS22E-SMT-WP-BK-T/R	-
REF:	S00192C	SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Adam Tech](#) manufacturer:

Other Similar products are found below :

[A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [217450-1](#) [KUSBX-AS2N-W](#) [30-498-6](#) [SK-60A-2](#) [30-489](#) [A-USB A-2P-C](#) [USBFTVSCCG](#) [E8110-001-01](#) [MUSBA81130](#) [USB3FTV7APEG](#) [4198](#) [17-200011](#) [1040870124](#) [914-614A2025S10200](#) [1002-001-BL-KIT](#) [MUSBR-AHD2-M41-SK](#) [GSB3116344HR](#) [GSB343K331HR](#) [USBF21GSCC](#) [U221-041N-1WVS62-F5D](#) [HYCW153-USBD05-500B](#) [HYCW219-USBD05-075B](#) [HYCW148-USBD05-117B](#) [HYCW149-USBD05-740B](#) [HYCW204-USBD05-108B](#) [HYCW214-USBA04-113B](#) [HYCW213-USBA04-113B](#) [KMMX-BSMT35S-1-B30TR](#) [GT-2A001F-CGNG1](#) [GT-USB-7010i](#) [HC-ST-003-07-J](#) [918-418K2022Y40028](#) [920-462A2021Y10104](#) [AF 90°](#) [WJDG ZB](#) [TYPE-C 6P LCH10.5](#) [MICRO 7.2ZB5.0](#) [AM 180°](#) [MINI 5PTP-GZ](#) [TYPE-C 16PLC-H10.0](#) [TYPE-C 6PLCH10.5 073](#) [MINI 5P](#) [90°4J](#) [10.0 180°ZCZB-HJ](#) [AF 180°WJB15.0](#) [TYPE-C 6P CC](#) [MICRO 5.9ZB5.0\(040\)](#) [10.0 HCHTZB6.3](#) [10.0 180° ZCJB-HJ](#) [TYPE-C](#) [14PLC-H10.0](#)