


PCIe-CPL64

2-CH PCI Express® PoCL Frame Grabber

Features

- PCI Express® x4 compliant
- Supports 2-CH Camera Link® Base configuration
- Acquisition pixel clock rates up to 85 MHz
- PoCL (Power over Camera Link®) safe power compliant with auto detection
- 128 MB of 200 MHz DDR SDRAM for acquisition
- 4 TTL Digital Input/Output, and 2 trigger Input
- Supports 64-bit memory addressing
- Two serial communication ports

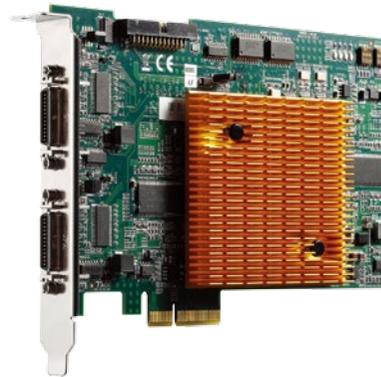

Introduction

The PCIe-CPL64 is a PoCL (Power over Camera Link®) frame grabber that is based on the PCI Express® x4 interface, and supports two-channel Camera Link “base” configurations, multi-tap area and line scan cameras. The PCIe-CPL64 frame grabber strikes a perfect balance between performance and cost. It is capable of simultaneously image acquisition from two completely independent Camera Link base configuration cameras, and supports image transfer rates up to 512 MB/s.

PoCL Technology

The PoCL (Power over Camera Link®) standard allows the camera link cable to supply power to the camera through the Camera Link connector without losing backward compatibility with the previous Camera Link® standard, this solution is particularly suitable for a small camera.

Benefits of PoCL

- Easy installation
- Reduce wiring (Single cable for digital I/F, and power)
- Reduce camera size

Software Support

- **OS Information**
 - Windows® 7/XP
- **Software Compatibility**
 - C#/.NET/VC++/VB/C++ Builder/Delphi
 - Sample program included
- **Software Recommendations**
 - ADLINK CamCreator™

Applications

- **PCB/FPD/Wafer/Solar Cell surface inspections**
- **Medical research instrumentations**

Ordering Information

- **PCIe-CPL64**
2-CH PCI Express® x4 PoCL frame grabber

Specifications

Model Name	PCIe-CPL64
Form Factor	PCI Express® x4 compliant
Video Input	Camera Link® LVDS deferential signals Dual Base Configuration: Using two MDR26 pins connectors Maximum camera link data rate: 85 MHz Supports PoCL and standard Camera Link interface and auto detect
Camera Control	Camera control: CC1 to CC4 control signal in two MDR26 pins connectors
External Signal Input	1 External RS422 level ABZ phase deferential signal for encoder input 2 channels TTL level Line /Area trigger input 2 channels TTL level Line trigger start input 2 channels TTL level exposure output Line trigger bypass output (encoder mode only) 4 channels digital input; 4 channels digital output
Power over Camera Link® (PoCL)	Power line output per channel : DC +12 V max @ 1 A Over-current Protection function, auto detect when non-PoCL cable or PoCL camera connected.
Operating Environment	0°C to +50°C (32°F to 122°F) Humidity: 5% to 90% RHNC
Storage Environment	Temperature: 0°C to 70°C (32°F to 158°F) Humidity: 0 to 95% RHNC
Power Requirements	+12 V max @ 0.5 A +3.3 V max @ 1.6 A
Dimensions	167.65 mm x 111.15 mm (6.53" x 4.33") (W x L)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Video Modules](#) category:

Click to view products by [ADLINK Technology](#) manufacturer:

Other Similar products are found below :

[conga-HDMI ADD2 Card](#) [96VG-2G-PE-MA2](#) [PCIe-CPL64](#) [PCIe-GIE74](#) [PCIe-GIE74 PRO](#) [PCIe-GIEIMX](#) [PCIe-GIENVQ](#) [DVP-7011HE](#)
[DVP-7031HE](#) [DVP-7633HE](#) [DVP-7634HE](#) [HDC-502E-R10](#) [HDC-701EL-R10](#) [IGCME-1300-R11](#) [NS-CA001](#) [NS-CA002](#) [DVP-7630HE](#)
[DVP-7635E](#) [DVP-7633E](#) [DVP-7030HE](#) [DVP-7014HE](#) [DVP-7012HE](#) [DVP-7610HE](#) [DVP-7641E](#) [SEN-16299](#)