

# EKI-9510E-2GMPH

# EKI-9510E-2GMPL

## EN 50155 10-Port Managed PoE M12 Ethernet Switch 72/96/110 V<sub>DC</sub>

## EN 50155 10-Port Managed PoE M12 Ethernet Switch 24/48 V<sub>DC</sub>



CE FCC

### Features

- Complies with EN50155
- 8 x M12 D-Coded 10/100Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input  
EKI-9510E-2GMPH: 72/96/110 V<sub>DC</sub>  
EKI-9510E-2GMPL: 24/48 V<sub>DC</sub>
- Operating Voltage  
EKI-9510E-2GMPH: 50.4~137.5 V<sub>DC</sub>  
EKI-9510E-2GMPL: 16.8~60 V<sub>DC</sub>
- X-Ring Pro supports rapid and predictable convergence
- 8-port PoE support IEEE802.3af/at
- M12 connector with IP40 protection

### Introduction

EKI-9500 series switch is designed for railway application, with rugged and high EMC performance. EKI-9500 series is the suitable networking solution for rolling stock and wayside applications. EKI-9500 series provide M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, to guarantee reliable operation against environmental disturbances, such as vibration and shock on train. EKI-9510E-2GMPH & EKI-9510E-2GMPL is a Managed PoE Ethernet switch, it provides 8 x Fast Ethernet M12 D-code interface with IEEE802.3af/at PoE(Power Over Ethernet) function. PoE ports can total provide up to 100Watts power budget for P.D. devices (such as camera, IP-phone and wireless access point). It also provides 2 x Gigabit Ethernet M12 X-code interface with Bypass function, to increase the reliability of the network. EKI-9510E-2GMPH/ MPL features a "flat" design, can be easy deployed with its slender size and let network deployment more simple in crowded carriage/ cabinet.

### Specifications

#### Interface

- I/O Port** 8 x M12 D-Coded 10/100Mbps PoE ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Console port** M12 A-Coded
- Power Connector** M12 A-Coded

#### Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 40
- Installation** Wall Mount
- Dimensions (W x D x H)** 216 x 132 x 59.3 mm
- Weight** 1.5kg

#### LED Display

- System LEDs** PWR1, PWR2, SYS, R.M., Alarm
- Port LED** Data, PoE

#### Environment

- Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Ambient Relative Humidity** 10~ 95% (non-condensing)

#### Power

- Power Consumption** 10 Watts
- PoE Power Budget** EKI-9510E-2GMPH: 120 Watts  
EKI-9510E-2GMPL: 60 Watts
- Power Input** EKI-9510E-2GMPH: 72/96/110 V<sub>DC</sub>  
EKI-9510E-2GMPL: 24/48 V<sub>DC</sub>
- Operating Voltage** EKI-9510E-2GMPH: 50.4~137.5 V<sub>DC</sub>  
EKI-9510E-2GMPL: 16.8~60 V<sub>DC</sub>  
Dual inputs Supports Overload Current Protection  
Supports Reverse Polarity Protection

#### Certification

- EMI** FCC Part 15 Subpart B Class A  
CE EN55032 (CISPR)  
EN55024 Class A
- EMS** EN61000-4-2 (ESD); EN61000-4-3 (RS);  
EN61000-4-4 (EFT); EN61000-4-5 (Surge);  
EN61000-4-6 (CS)  
IEC 61373  
IEC 60068-2-32
- Shock** IEC 61373
- Freefall** IEC 60068-2-32
- Vibration** IEC 61373
- Certificate** EN 50155; EN50121-3-2

#### L2 Features


- L2 MAC Address** 8K
- Jumbo Frame** 9KB
- VLAN Group** 256 (VLAN ID 1~4093)
- VLAN** 802.1Q VLAN, GVRP
- Port Mirroring** Per port, Multi-source port
- IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- Storm Control** Broadcast, Multicast, Unknown unicast
- Redundancy Protocol** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro

#### QoS

- Priority Queue** Scheduling WRR (Weighted Round Robin), SP (Strict Priority)
- Class of Service** IEEE 802.1p based CoS, IP TOS, DSCP based CoS
- Rate Limiting** Egress Rate limit
- Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

## Dimensions

Unit: mm [inch]

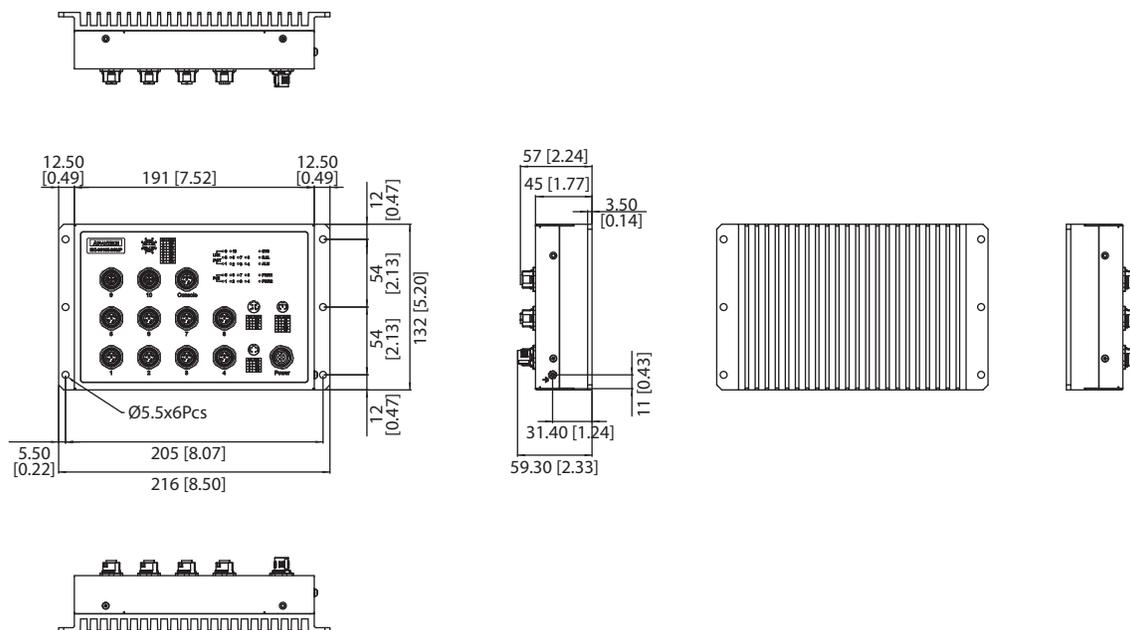

### Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based, MAC-Based), RADIUS, TACACS+
- **Advanced Security** IP Source Guard

### Management

- **DHCP** Client, Server, Option 66/67
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security Access** SSH 2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP server/client

## Ordering Information

- **EKI-9510E-2GMPH-AE** 8 x M12 D-Coded PoE + 2 x M12 X-Coded Managed Ethernet Switch, 72/96/110V<sub>DC</sub> dual power input
- **EKI-9510E-2GMPL-AE** 8 x M12 D-Coded PoE + 2 x M12 X-Coded Managed Ethernet Switch, 24/48V<sub>DC</sub> dual power input

## Accessories

PN		Description
OPT1-M12-CRP-4MD		Phoenix Contact M12 D-code 4 pin Male crimp type connector
OPT1-M12-CRP-8MX		Phoenix Contact M12 X-code 8 pin Male crimp type connector
OPT1-M12-CRP-5MA		Phoenix Contact M12 A-code 5 pin Male crimp type connector
OPT1-M12-CRP-4FA		Phoenix Contact M12 A-code 4 pin Female crimp type connector
OPT1-M12C-4MD-150R		M12 D-code 4 pin Male to RJ45, cable length: 1.5m
OPT1-M12C-8MX-150R		M12 X-code 8 pin Male to RJ45, cable length: 1.5m
OPT1-M12C-5MA-DB9		M12 A-code 5 pin Male to DB9 console, cable length: 1.5m
OPT1-M12C-4FA-100		M12 A-code 4 pin Female to 1m cable
1990023703S000		M12 waterproof CAP (1pc.)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)  
[EXTENDER 2001 ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [BCM54291B0IQLEG](#) [7000-P3201-P050150](#) [750-1415](#) [750-494](#) [750-495](#) [750-612](#)  
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)  
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)  
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [SW-125](#) [SW-525](#) [SW-725](#) [1005957](#) [1006191](#) [304TX-N](#) [WIZ107SR\\_TTL](#) [ES-320](#)  
[TDKEZW5](#)