


IDK-1108

8.4" SVGA Industrial Display kit with Touch Solution

NEW

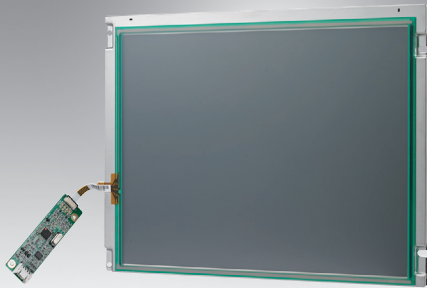

Features

- 8.4" LCD supports 800 x 600 pixels and wide operating temperature (-20 ~ 70° C)
- LCD brightness of 500 cd/m²
- 4-wire resistive touch solution
- LVDS signal interface
- Low power consumption 3.24 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- PCAP solution (Customized request)
- AR surface treatment (Customized request)
- Optical bonding (Customized request)

Introduction


The Advantech IDK-1108 series comes with a 8.4" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-1108 series supports 4-wire resistive touch with low power consumption at the maximum of 3.24 W. IDK-1108 series is ideal for embedded applications which customers have maximum flexibility for mechanical design.

Specifications


Model No.	IDK-1108R-50SVB1	
LCD Panel	Display Size	8.4", 4:3
	Resolution	800 x 600
	Viewing Angle (U/D/L/R)	80° / 60° / 80° / 80°
	Brightness	450 cd/m ²
	Backlight Life (hrs)	50,000
	Contrast Ratio	600 : 1
	Response Time (ms)	16 ms
	Colors	6 Bit (262K)/8 bit (16.2 M)
	Voltage	3.3 V Power
	Consumption	3.24 W
	Signal Interface	1 channel LVDS
	Weight	250 g
	Dimensions (W x H x D)	203.0 x 145.5 x 8 mm
Touch Screen	Touch Screen	4-wire Resistive
	Transparency	82.5± 2.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-20 ~ 70° C
	Storage Temperature	-30 ~ 70° C
	Humidity	90% @ Max. 60° C, non-condensing

Dimensions

Unit: mm

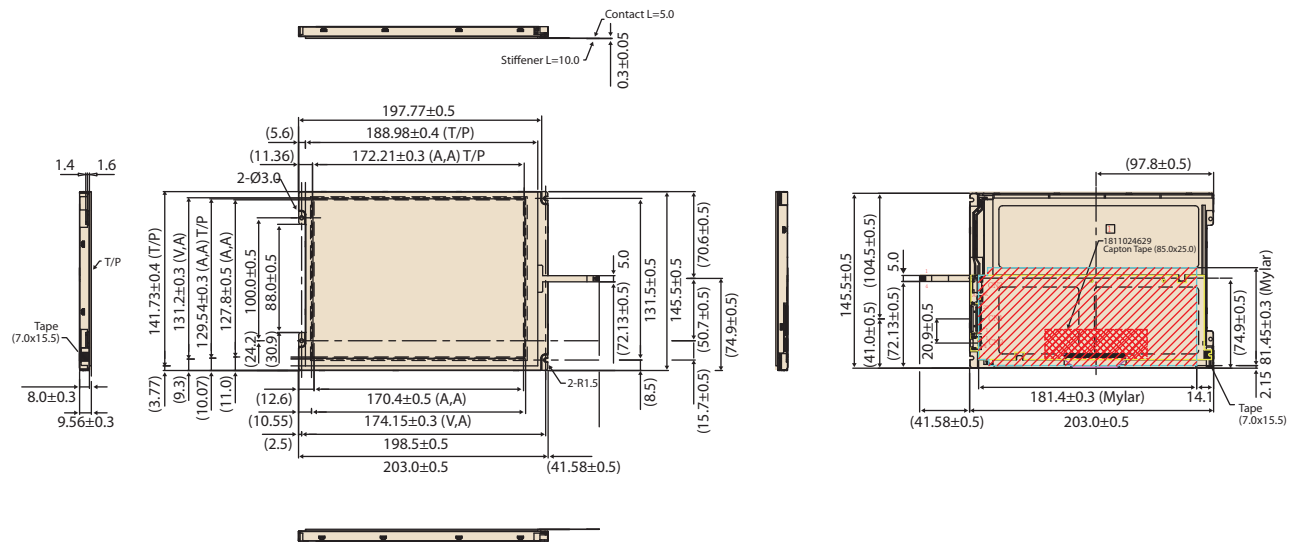

Touch Control Board

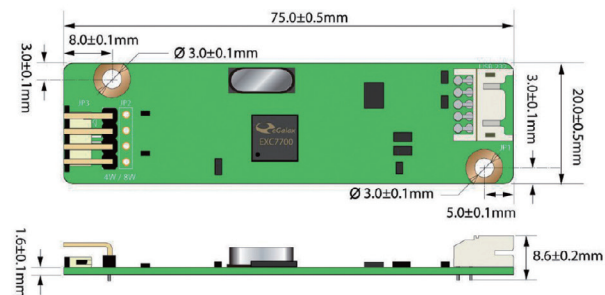

Ordering Information

Part No.	Size	Brightness (cd/m ²)	Interface	Touch screen	Touch Interface
IDK-1108R-50SVB1	8.4"	450	LVDS	4-wire Resistive	USB

Packing List

Part Number	Description
ETM-RES05C-EEH4EE	1 x 4-wire USB Touch controller
1700020324-01	1x USB Touch cable 5P-2.0/USB-A (M) 180CM

Note: Package contents are subject to change without prior notice

Optional Order

SBC Part No.	LVDS Cable Part No.	Display Interface	B/L Cable Part No	Touch Interface	Touch Power Input
MIO-5270	96CB-L2040PAB4	LVDS: Single channel 18bit (SVGA)	96CB-E0405PIB3 (12V: PWM)	USB	5 V
PCM-9362	96CB-L2020PAB2	LVDS: Single channel 18bit (SVGA)	96CB-E0405PIB3 (12V: PWM)	USB	5 V
AIMB-270	96CB-L2040PAB4	LVDS: Single channel 18bit (SVGA)	96CB-E0405PIB3 (12V: PWM)	USB	5 V

For more compatible embedded board solution, please visit our Build Your display web page as bellow
<http://www.advantech.com/buildyourdisplay>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[P6171DPR-DC-U](#) [P6191PR-DC-U-V3](#) [17978](#) [20135](#) [MIKROMEDIA 3 FOR PIC32MZ CAPACITIVE FPI](#) [19885](#)
[RL0F00101000JGDAASA00](#) [1500CSH](#) [MOD-OLED-128x64](#) [ULCD-104D](#) [ULCD-104DCT](#) [GEN4-ESP32-50CT](#) [GEN4-ESP32-50CT-CLB](#)
[GEN4-ESP32-70](#) [GEN4-ESP32-50T](#) [GEN4-ESP32-24](#) [GEN4-ESP32-35CT](#) [GEN4-ESP32-32](#) [GEN4-ESP32-43T](#) [GEN4-ESP32-35](#) [GEN4-](#)
[ESP32-32CT](#) [GEN4-ESP32-24CT](#) [GEN4-ULCD-43DT-HR](#) [GEN4-ESP32-43CT](#) [ESP32-90CT](#) [GEN4-ESP32-50](#) [GEN4-ESP32-32CT-CLB](#)
[ESP32-90T](#) [DM2-170H-R10](#) [gen4-uLCD-70P4CT-CLB](#) [6SL32550AA004JA2](#) [6SL32550AA004CA1](#) [3D32HK-200](#) [11769](#) [MIKROMEDIA](#)
[FOR DSPIC33](#) [MIKROMEDIA FOR PIC24](#) [MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#) [MIKROMEDIA HMI 3.5](#)
[RES](#) [MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#) [MIKROMEDIA 5 FOR](#)
[TIVA SHIELD](#) [MIKROMEDIA CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#) [MIKROMEDIA FOR PSOC5LP](#) [MIKROMEDIA HMI 4.3](#)
[UXB](#) [MIKROMEDIA HMI 5 RES](#) [MIKROMEDIA HMI 5 UXB](#) [MIKROMEDIA HMI 7](#)