

IPS-D22A60W Series

60 Watt Compact DIN-Rail Power Supply



Features

- Compact design with 60 watt output
- Input range: 85 ~ 264 V_{AC}/100 ~ 375 V_{DC}
- Wide Operating Temperature -20-70 °C with full load up to 50 °C
- Cold start at -30 °C
- High efficiency up to 88% @ 230V_{AC}
- Supports OVP/SCP/OC/OTP
- LED indicator for DC OK




Specifications

Output	Model	IPS-D22A60W12V-A		IPS-D22A60W24V-A	IPS-D22A60W48V-A
	Output Voltage	12V _{DC}		24V _{DC}	48V _{DC}
	Output Voltage Adjustment Range	12V _{DC} to 15V _{DC}		24V _{DC} to 30V _{DC}	48V _{DC} to 56V _{DC}
	Rated Current	5.00A		2.50A	1.25A
	Efficiency (typical)	88% @ 230V _{AC}			
	Output Power	60 Watts			
	Accuracy (%)	±1%			
	Max. Ripple & Noise (mVp-p)	120 mVp-p			
	Line Regulation	±1%			
	Load Regulation	±1%			
Input	Hold-up Time	115V/60Hz: 16ms Minimum; 230V/50Hz: 50ms. Minimum			
	Input Voltage	85 ~ 264V _{AC} ; 100 ~ 375V _{DC}			
	Input Frequency	47 ~ 63 Hz			
	Input Current	< 1.8A @ 115V _{AC} , < 1.0A @ 230V _{AC}			
	Max. Inrush Current	50A @ 230V _{AC} , cold start @ 25 °C and full load			
Protection	Leakage Current	< 1 mA when power supply is connected to 240V _{AC} /60Hz			
	OVP (Over Voltage Protection)	18V _{DC} max (Latch Mode)	36V _{DC} max (Latch Mode)	64V _{DC} max (Latch Mode)	
	OC/CP (Over Current Protection)	5.25 ~ 7.5A	2.62 ~ 3.7A	1.3 ~ 1.8A	
	SCP (Short Circuit Protection)	< 0.1 ohm			
	OTP (Over Temperature Protection)	Auto-Recovery			
Environment	Operating Temperature	-20-70 °C (Please refer to power derating curve)			
	Cold Start	-30 °C			
	Power Derating	Full load to 50 °C; output power derated 2% per °C			
	Operating Humidity	5 to 95% RH, non-condensing			
	Storage Temperature	-40-85 °C			
	Operating Altitude	5,000 m			
	Shock Test (Non-Operating)	IEC60068-2-27, 30G (300m/S²) for a duration of 18ms			
Insulation	Vibration Test (Non-Operating)	IEC60068-2-6, 10Hz to 150Hz @ 50m/S² (5G peak); 90 min per axis for all X, Y, Z direction			
	Dielectric Strength	I/P-O/P: 1.5kVAC, I/P-FG: 1.5kVAC, O/P-FG: 1.5kVAC			
	Insulation Resistance	AC input - DC output/FG, DC output - FG: 50M Ohms / 500V _{DC}			
Safety & EMC	CB/UL/TUV/CCC	IEC 62368-1, UL 62368-1, EN 62368-1, GB4943.1			
	EMC Emission	EN55032 (CISPR32), EN61000-3-2,3, EN61000-6-3, EN61000-6-4, EN61204-3 Class A			
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11, EN61000-6-2, EN55035, EN61204-3 Class A, heavy industry level			
Mechanical Specifications	Case Cover / Chassis	Plastic			
	Connector	Input	3 Pins (300V/ 20A)		
		Output	4 Pins (300V/ 20A)		
	Wire	Input	AWG 18-12		
		Output	AWG 22-12		
	Terminal Type	Screw Terminal			
	Mounting Rail	Standard TS35 DIN-Rail in accordance with EN60715			
	Cooling System	Conventional			
Dimensions (W x H x D)	37.9 x 100 x 94.1 mm / 1.49 x 3.94 x 3.70 in				
Reliability and Warranty	Weight	227±5 g / 0.50 lb.			
	MTBF (hours)	500,000 (based on SR-332)			
	Warranty	3 Years			


Dimensions

Unit: mm [inch]

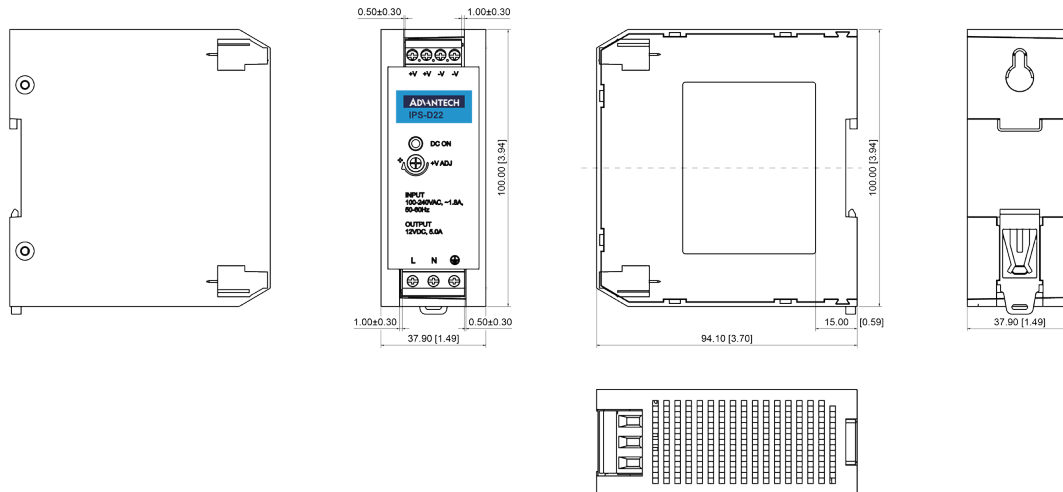


De-rating Curve

Output Load De-rating vs. Surrounding Air Temperature

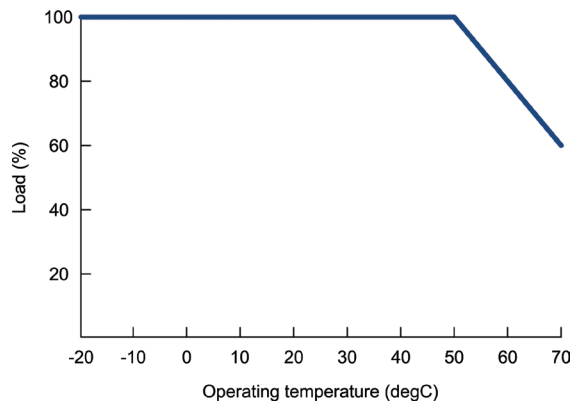

Output Load De-rating vs. Input Voltage

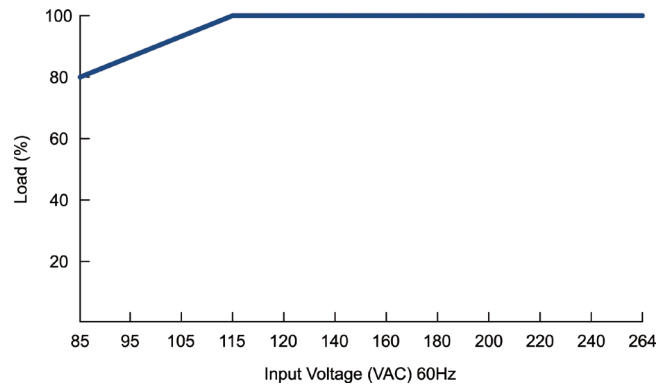

Ordering Information

Part Number	Description
IPS-D22A60W12V-A	12 V _{DC} / 60 Watts DIN-Rail Power Supply
IPS-D22A60W24V-A	24 V _{DC} / 60 Watts DIN-Rail Power Supply
IPS-D22A60W48V-A	48 V _{DC} / 60 Watts DIN-Rail Power Supply

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN Rail Power Supplies](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[DVP01PU-S](#) [DVPPS02](#) [PS-C24024](#) [ADNB040-24-1PM-C](#) [SS14011524](#) [PSC-6024](#) [PS-C12024](#) [PSC-2024](#) [TRIO-PS-2G/1AC/12DC/5/C2LP](#)
[PSD-A120W12](#) [NDR-7524](#) [787-1200.](#) [AMED75-48SJZ](#) [1SVR427043R1200](#) [50995](#) [50903](#) [EL50-D](#) [50996](#) [HDN-3024](#) [ISED-120-24](#)
[1335698](#) [POS DIN30W24](#) [SPB-015-12](#) [EL50-B](#) [50905](#) [DRB240-48-1](#) [DRS-480-48](#) [POS DIN30W15](#) [POS MDIN60W12](#) [HDN-3012](#)
[CFM50S240-SD](#) [DRB240-24-3-A0](#) [POS DIN60W24](#) [XCSD1030W012VAA](#) [DRB120-12-3-A1](#) [POS DIN60W15](#) [CFM70S050-SD](#) [50904](#)
[SPB-030-12](#) [DRB120-48-1](#) [CFM70S120-SD](#) [POS DIN100W15](#) [CFM70S240-SD](#) [POS DIN30W12](#) [CFM50S480-SD](#) [CFM70S150-SD](#) [HDN-](#)
[6012](#) [POS MDIN100W12](#) [CFM70S360-SD](#) [POS MDIN40W24](#)