


PCI-1602 PCI-1604 PCI-1610 PCI-1612

2-port RS-232/422/485 PCI Communication Card

2-port RS-232 PCI Communication Card

4-port RS-232 PCI Communication Card

4-port RS-232/422/485 PCI Communication Card

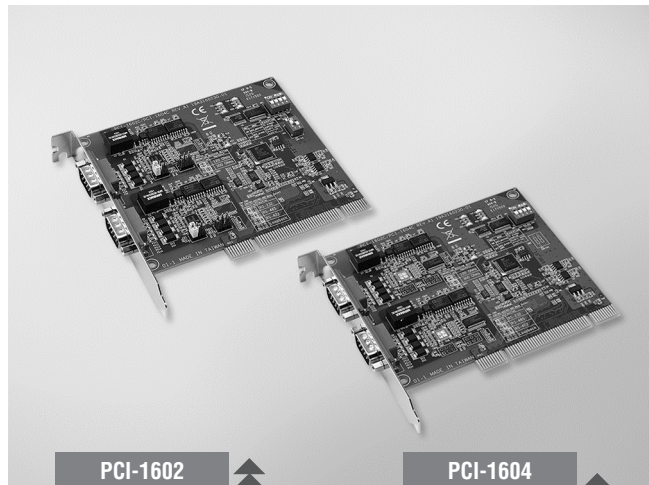

PCI-1602

PCI-1604



Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 2 x RS-232 or RS-232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V352 UART with 256-byte FIFOs

Specifications

General

- Bus Type** Universal PCI v2.2
- Certification** CE, FCC class A
- Connectors** 2x male DB9
- Dimensions (L x W)** 119.91 x 106.67 mm (4.72" x 4.2")
- Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- Comm. Controller** XR17V352
- Data Bits** 5, 6, 7, 8
- FIFO** 256 bytes
- Parity** None, Odd, Even, Mark and Space
- Speed** 50 bps ~ 921.6 kbps
- Stop Bits** 1, 1.5, 2

Software

- Bundled Software** ICOM Tools
- OS Support** Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

Environment


- Operating Humidity** 5 ~ 95 % RH, non-condensing
- Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1602B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1602C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}
PCI-1604C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}

Ordering Information

- PCI-1602B-CE** 2-port RS-232/422/485 PCI Comm. Card w/Surge
- PCI-1602C-AE** 2-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation
- PCI-1604C-AE** 2-port RS-232 PCI Comm. Card w/Surge & Isolation

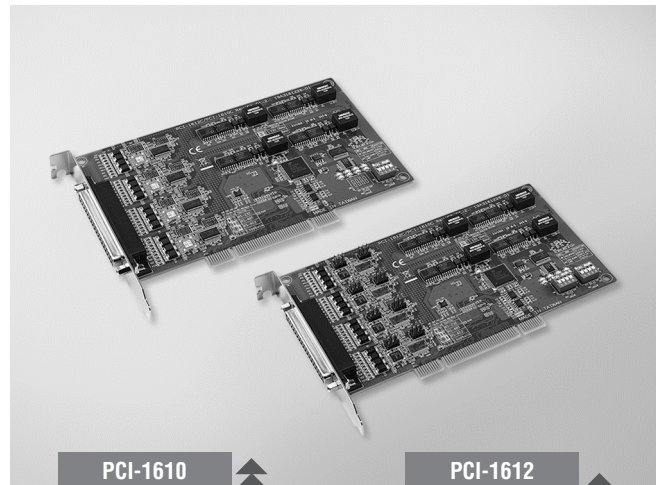

PCI-1610

PCI-1612



Features

- Universal PCI v2.2
- Speeds up to 921.6 kbps for extremely fast data transmission
- Supports any baud rate setting
- 4 x RS-232 or RS-232/422/485 ports
- Supported operating systems: Windows 7/8/10, and Linux.
- XR17V354 UART with 256-byte FIFOs

Specifications

General

- Bus Type** Universal PCI v2.2
- Certification** CE, FCC class A
- Connectors** 1x Female DB37
- Dimensions (L x W)** 174.65 x 106.67 mm (6.88" x 4.2")
- Power Consumption** 260 mA @ +3.3 V (typ.)

Communications

- Comm. Controller** XR17V354
- Data Bits** 5, 6, 7, 8
- FIFO** 256 bytes
- Parity** None, Odd, Even, Mark and Space
- Speed** 50 bps ~ 921.6 kbps
- Stop Bits** 1, 1.5, 2

Software

- Bundled Software** ICOM Tools
- OS Support** Windows 7/8/10, and Linux. (You can reference the SW release note to know the supported OS version.)

Environment

- Operating Humidity** 5 ~ 95 % RH, non-condensing
- Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
- Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Protection

Model Name	ESD Protection	EFT Protection	Surge Protection	Isolation Protection
PCI-1610B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1610C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}
PCI-1612B	15KV (air), 8KV (contact)	1000 V	1000 V	
PCI-1612C	15KV (air), 8KV (contact)	1000 V	1000 V	3000 V _{oc}

Ordering Information

- PCI-1610B-DE** 4-port RS-232 PCI Comm. Card w/Surge
- PCI-1610C-CE** 4-port RS-232PCI Comm. Card w/ Surge & Isolation Protection
- PCI-1612B-DE** 4-port RS-232/422/485 PCI Comm. Card w/Surge
- PCI-1612C-CE** 4-port RS-232/422/485 PCI Comm. Card w/Surge & Isolation

Note: this series includes cable OPT4A.

Accessories

- OPT4A-AE** DB37 x1 to DB9 x4 Cable, 30cm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#) [UC-313](#)