
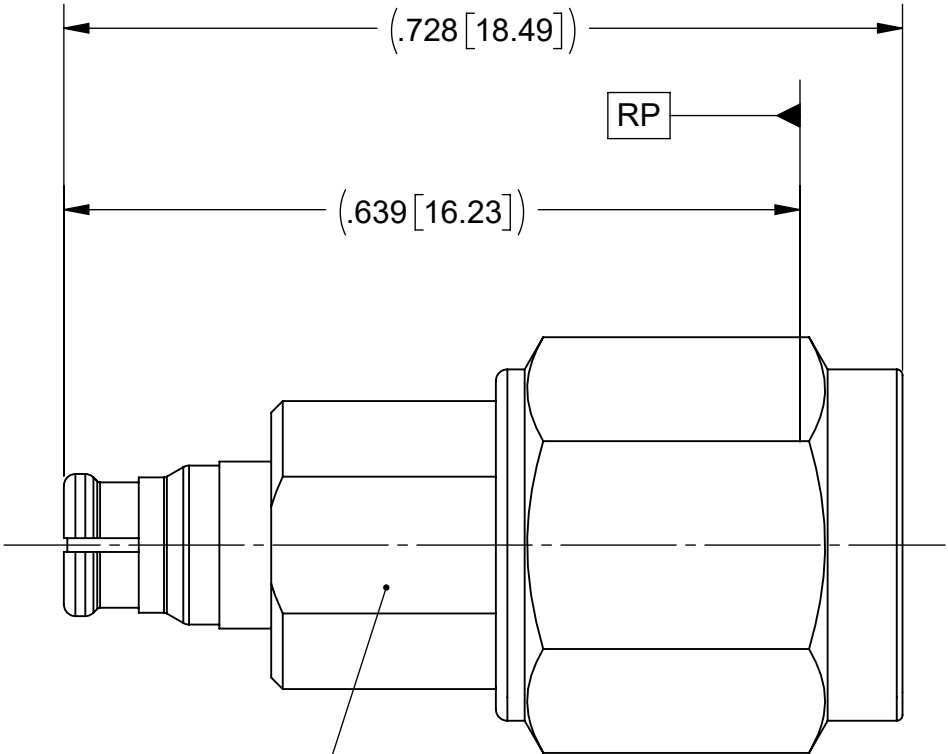
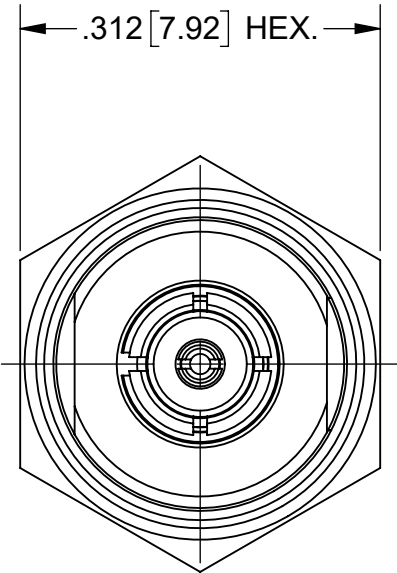


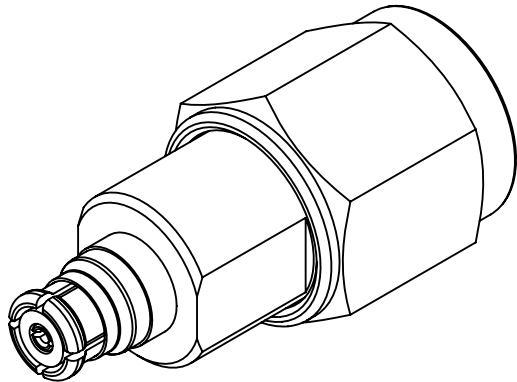

MATERIAL:

|                                              |                                                                                        |
|----------------------------------------------|----------------------------------------------------------------------------------------|
| INSERT & COUPLING NUT:                       | STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND. A |
| BODY, LOCK RING, ALIGNMENT SPRING & CONTACT: | BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04                             |
| BEAD:                                        | ULTEM 1000 PER ASTM D5205                                                              |
| INSULATOR:                                   | PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B                                          |
| GASKET:                                      | SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 60/70                                   |

FINISH:

|                                   |                                                                                                      |
|-----------------------------------|------------------------------------------------------------------------------------------------------|
| INSERT & COUPLING NUT:            | PASSIVATED PER AMS-2700                                                                              |
| BODY, ALIGNMENT SPRING & CONTACT: | GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN. |

PERFORMANCE:

|              |                 |
|--------------|-----------------|
| IMPEDANCE:   | 50 OHMS         |
| FREQ. RANGE: | DC TO 40.0 GHz. |

| REVISION HISTORY |             |       |          |
|------------------|-------------|-------|----------|
| REV              | DESCRIPTION | DATE  | APPROVED |
| -                | NRN 48389   | 07/24 | SEE PDM  |
|                  |             |       |          |
|                  |             |       |          |

|           |           |                                                                                                      |
|-----------|-----------|------------------------------------------------------------------------------------------------------|
| MATERIAL: | SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES:<br><br>FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$<br> |
|-----------|-----------|------------------------------------------------------------------------------------------------------|

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for*** [RF Adapters - Between Series](#) ***category:***

***Click to view products by*** [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[5945-9503-000](#) [ADPL75-A1-PL75](#) [BJ158FL](#) [9317505](#) [ADBJ20-E2-BJ79](#) [ADBJ77-A1PL3155](#) [UAD95](#) [242235](#) [TM-FMEM-NDS-50](#) [AD-HQF-QCM-PM-2.5](#) [242291](#) [ADT-2685-TM-SMM-02](#) [VA301](#) [ADT-2681-NM-SMF-02](#) [000-78875](#) [ADUBJ20-E1-PL375](#) [AD-UBJ20-E1-BJ89](#) [5300](#) [N9910X-602](#) [000-2900](#) [R191630007](#) [1057377-1](#) [1059825-1](#) [RF2-02-T-02-50-G](#) [RF2-03-T-00-50-G](#) [4295](#) [MCX/M-SMA/F](#) [1270](#) [BNC\(75\)J-H.FLJ-BPA-V\(40\)](#) [1296](#) [1297](#) [400PSM-CR](#) [1468](#) [53K164-S00N1](#) [SMA6251A1-3GT50G-50](#) [FME/M-SMA/F](#) [73386-1640](#) [82-6532](#) [ETC1-1-10](#) [BD2130J5050A00](#) [BD2326L50200A00](#) [73386-0192](#) [73386-0103](#) [1046274-1](#) [242105](#) [242130](#) [242201RP](#) [MABACT0066](#) [MABACT0063](#) [25-7510](#)