

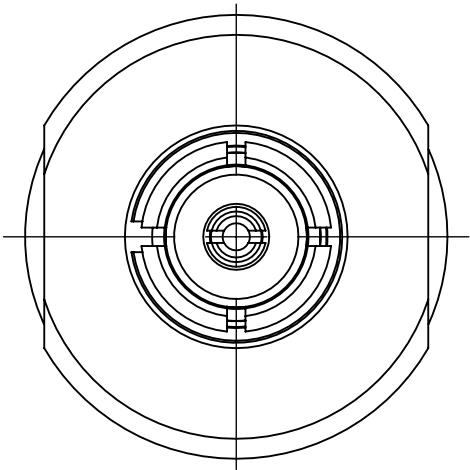


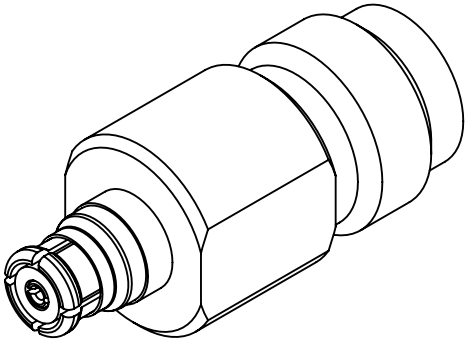

PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	NRN 48390	07/24	SEE PDM

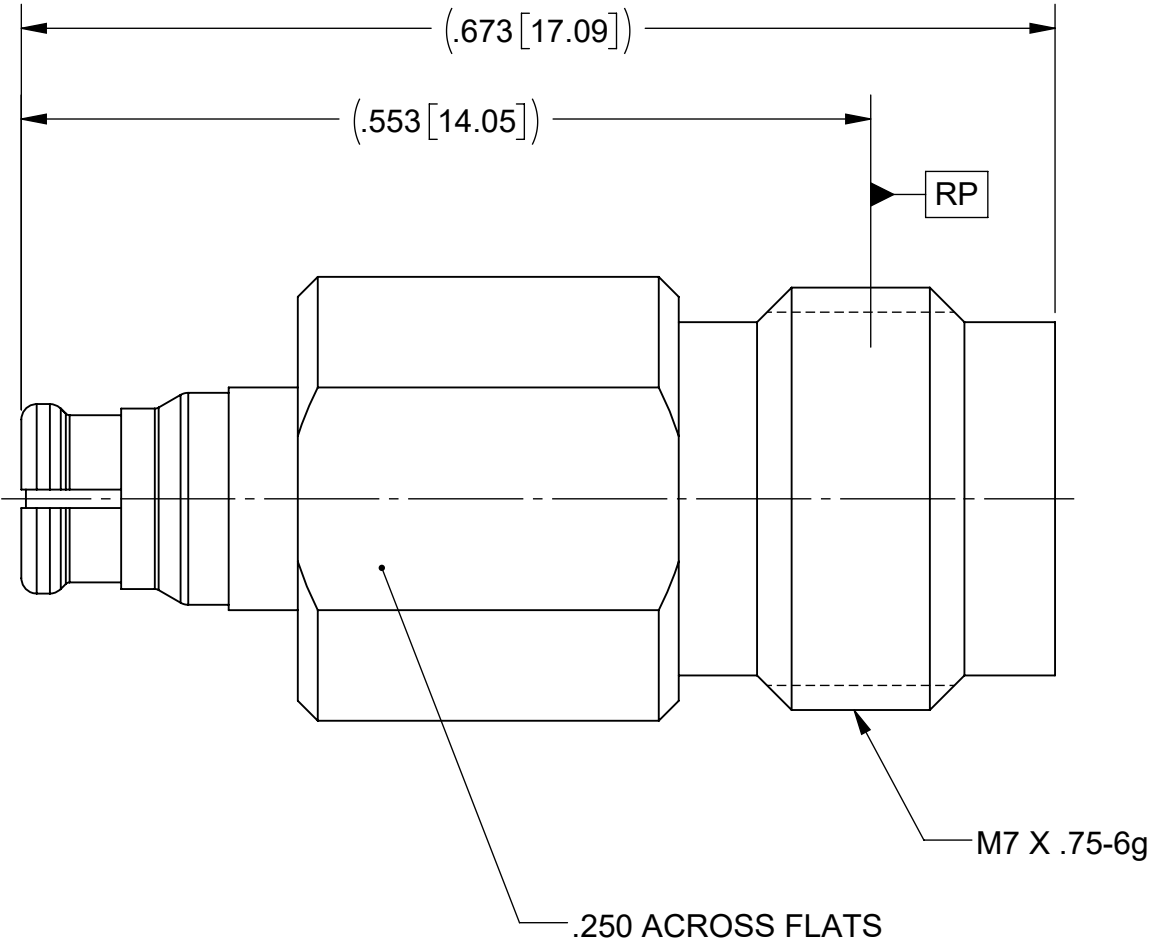

MATERIAL:

INSERT: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND. A

BODY, ALIGNMENT SPRING & CONTACT: BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

BEAD: ULTEM 1000 PER ASTM D5205

FINISH:

INSERT: PASSIVATED PER AMS-2700

BODY, ALIGNMENT SPRING & CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS
FREQ. RANGE: DC TO 40.0 GHz.

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - Between Series](#) ***category:***

Click to view products by [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[5945-9503-000](#) [ADBJ20-E1-BJ379](#) [ADI95](#) [ADPL75-A1-PL75](#) [BJ158FL](#) [95-850-148-2](#) [ADBJ20-E2-BJ79](#) [UAD95](#) [242235](#) [AD-HQF-QCM-PM-2.5](#) [VA301](#) [ADT-2681-NM-SMF-02](#) [000-78875](#) [SMAF-SMBF1-3GT50G-50](#) [SMAM-MMCXM1-3GT50G-50](#) [5300](#) [N9910X-602](#) [000-2900](#) [1057377-1](#) [1059825-1](#) [RF2-03-T-00-50-G](#) [4295](#) [MCX/M-SMA/F](#) [1269#](#) [1270](#) [BNC\(75\)J-H.FLJ-BPA-V\(40\)](#) [1296](#) [1297](#) [400PSM-CR](#) [53K164-S00N1](#) [53S164-K00N1](#) [SMA6251A1-3GT50G-50](#) [FME/F-SMA/M](#) [FME/M-SMA/F](#) [73386-1640](#) [82-6532](#) [1918231](#) [22640154](#) [22640940](#) [22645651](#) [23004937](#) [73386-0192](#) [73386-0103](#) [1046274-1](#) [242105](#) [242130](#) [242201RP](#) [25-7510](#) [122498RP](#) [ADAPT/MMCXF/SMAM](#)