

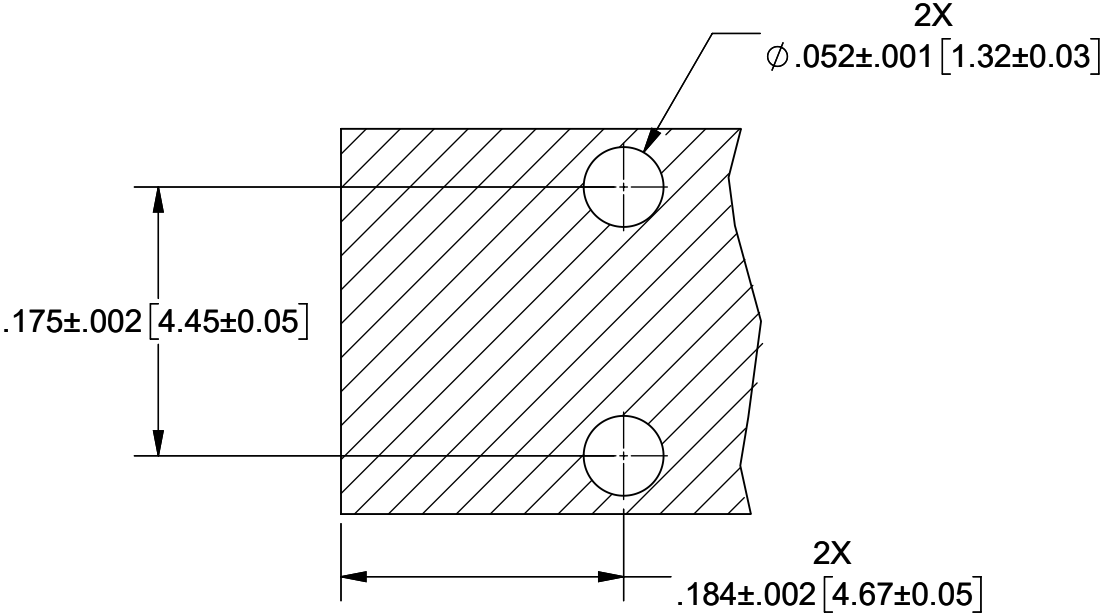


PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 48937	2/25	SEE PDM

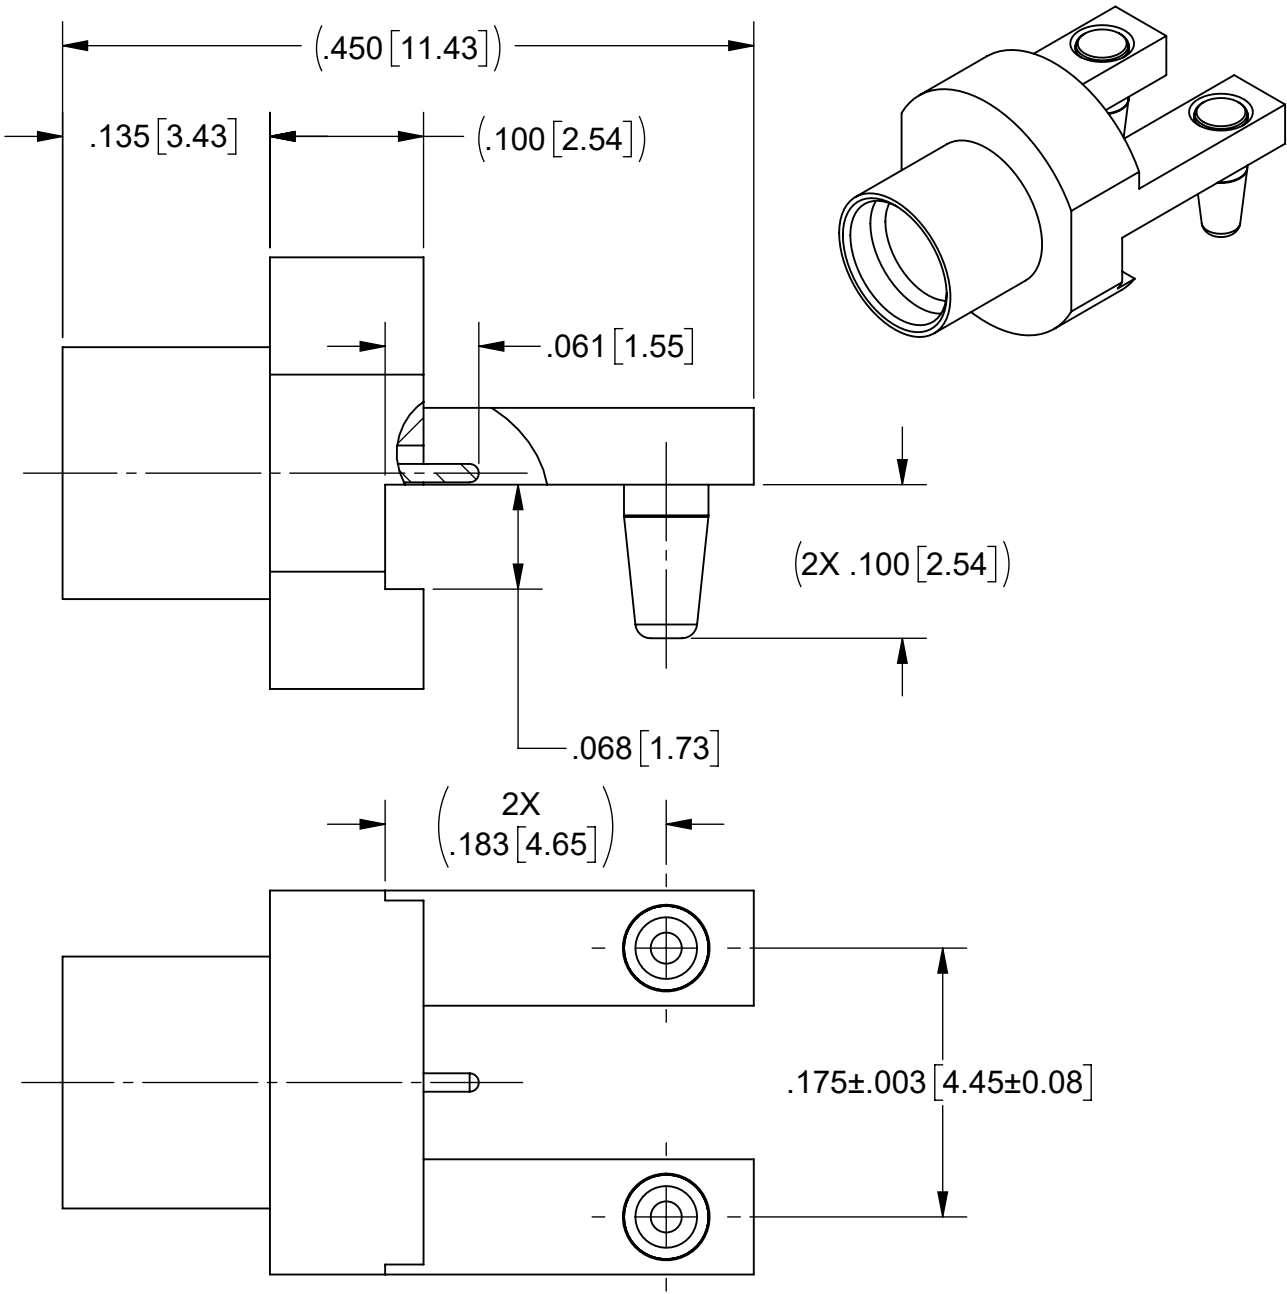

RECOMMENDED MOUNTING PATTERN

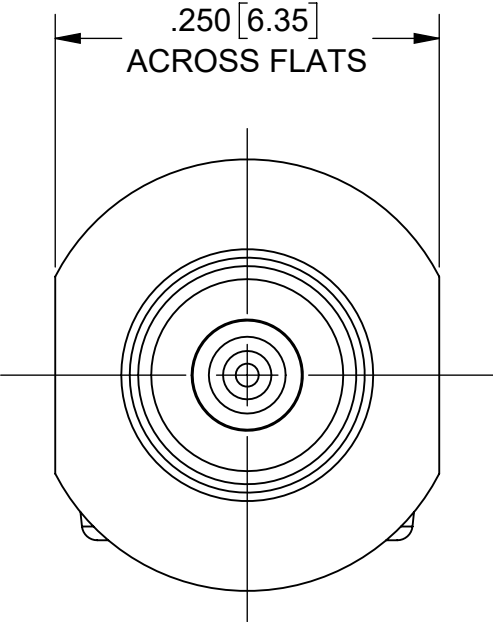

MATERIAL:

BODY & PINS:	STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1; OR ASTM A582 TYPE 303, COND. A
CONTACT:	BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
INSULATOR:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY & CONTACT:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
-----------------	--

PINS:	PASSIVATED PER AMS-2700
-------	-------------------------

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 40.0 GHz.

TABLE 1	
SV P/N	DETENT
1211-66443	SMOOTH BORE
1211-66444	FULL DETENT

MATERIAL:	SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: $\pm 1/64$ ANGULAR: X° $\pm 1^{\circ}0'$
-----------	-----------	--

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) ***category:***

Click to view products by [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[6002-7051-003](#) [6059674-1](#) [630059-000](#) [M55339/15-00491](#) [7002-1541-010](#) [7002-1572-002](#) [7003-1572-002](#) [7004-1512-000](#) [7009-1511-004](#)
[7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7405-1521-005](#) [7405-1521-019](#) [7405-1521-802](#) [755-74-5](#) [7706-2](#) [873183](#)
[PL375-33](#) [95-850-148-3](#) [R107003010W](#) [R112186000](#) [R113082097](#) [R113236000](#) [R113240097](#) [R114083000](#) [R114670000W](#) [R121053000](#)
[R124072220W](#) [R124076450](#) [R124175123](#) [R125075001](#) [R125414001](#) [R125415030](#) [R125415271](#) [R141007161](#) [R141574161W](#)
[R142004000W](#) [R142076000W](#) [R142076161W](#) [R142184000W](#) [R142676700](#) [R143012000](#) [R143075000W](#) [R143089117](#) [R143235161W](#)
[R143292700](#) [R143557000](#) [R161008000](#)