

NOTES:

1. MATERIALS AND FINISHES:
BODY, BRAID CLAMP, WASHERS,
RETAINING RING, SHELL & HEX NUT - BRASS, NICKEL PLATING
CONTACT - BRASS, SILVER PLATING
INSULATORS - PTFE, NATURAL
GASKETS - SILICONE RUBBER
SPRING - BeCu, NICKEL PLATING
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 4 GHz
C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65 °C TO +165 °C


4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 69475, AND DATE CODE"
5. CABLE ASSEMBLY INSTRUCTIONS:
A. STRIP CABLE AS SHOWN.
B. SLIDE INSULATOR ONTO TO THE CABLE.
C. SLIDE CLAMP NUT, WASHER, GASKET & BRAID CLAMP OVER CABLE SHEATH.
D. COMB OUT THE BRAID AND FOLD OUT, TRIM EXCESS BRAID.
E. SOLDER CABLE CENTER CONDUCTOR TO CENTER CONTACT.
F. SLIDE SUB-ASSEMBLY TO THE REAR SIDE OF THE BODY AND TIGHTEN WITH
PROPER SPANNER. MAKE ENSURE INTERFACE DIMENSIONS TO MEET.

6 SHOWS CABLE ENTRY DIMENSIONS.


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
B	SEE SHEET 1	28-Sep-06	--	MARK
AA	SEE SHEET 1	29-Jul-09	47718	AC
AB	REDRAWN IN PRO-E & SYNCHED DRAWING	22-Apr-15	49786	JC

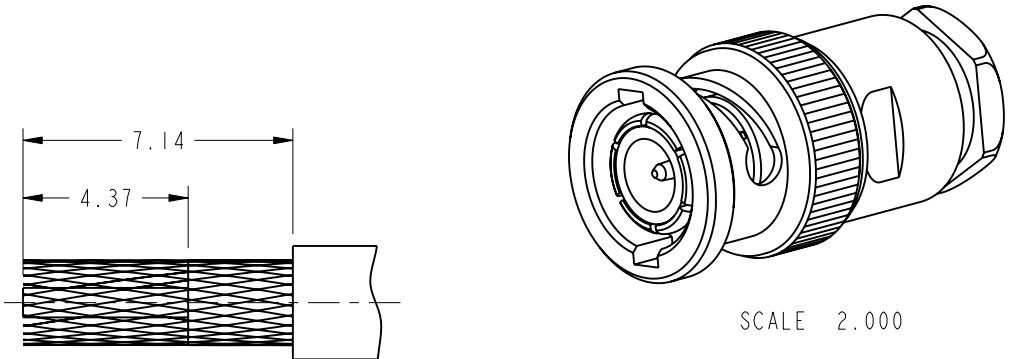

RECOMMENDED CABLE
STRIPPING DIMENSIONS

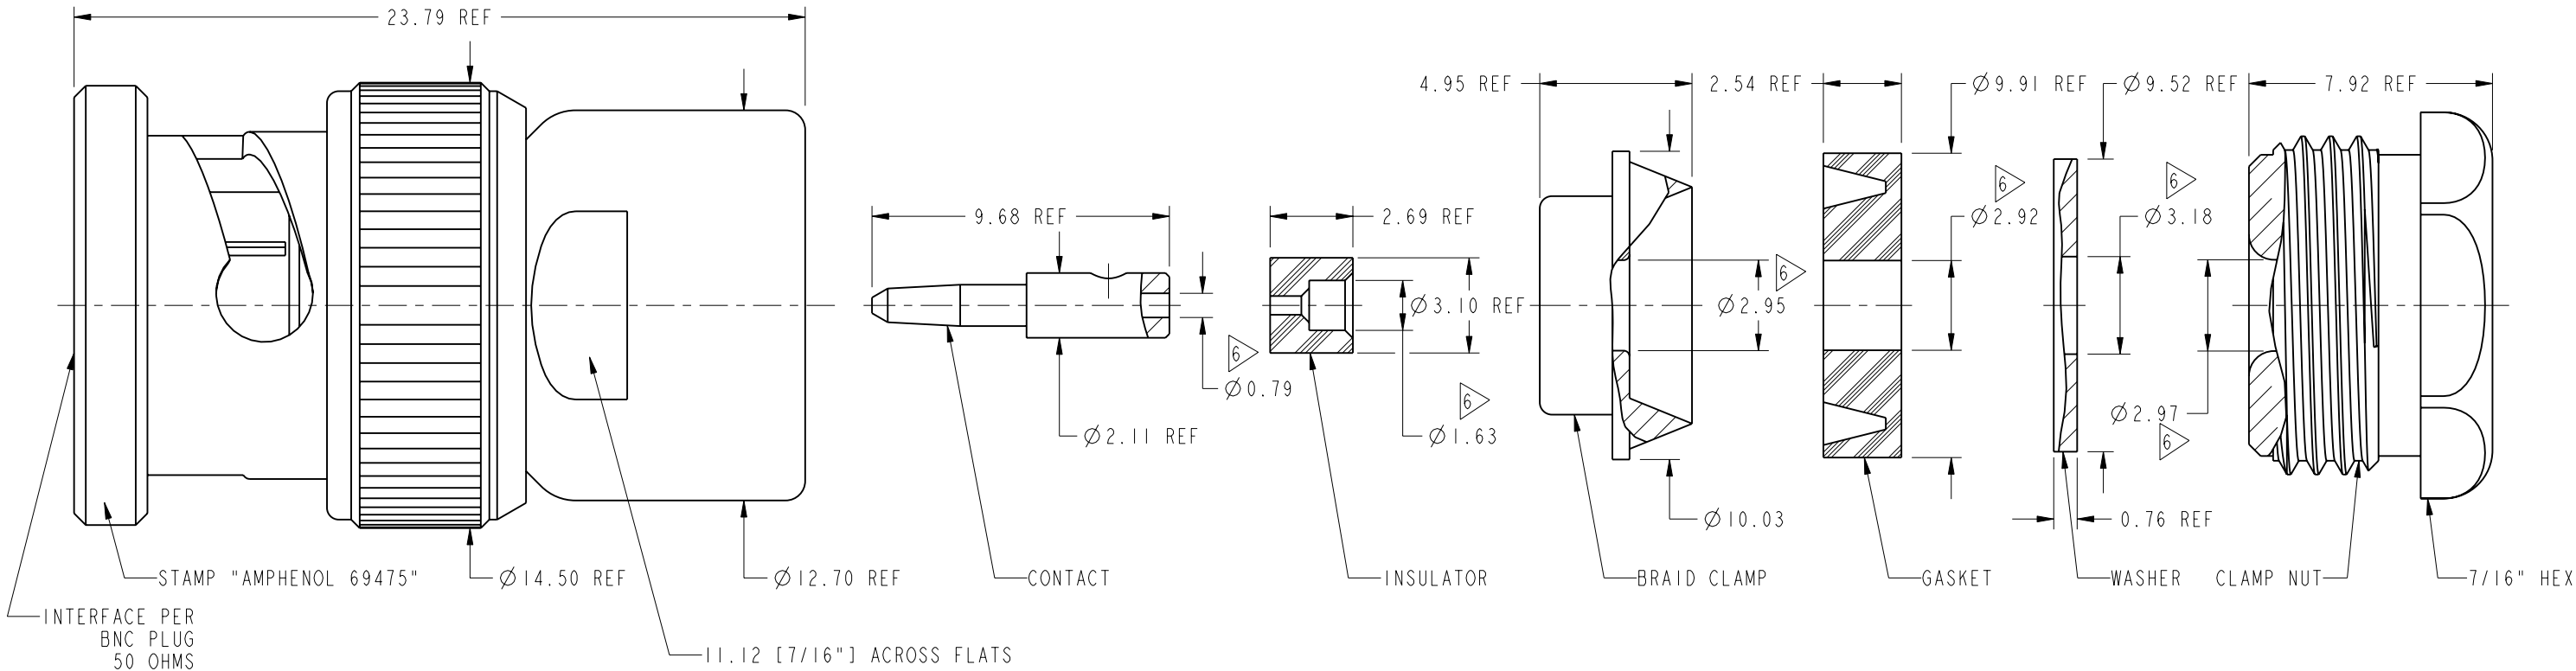

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm ± 0.05mm 0.5 - 6mm ± 0.1mm 6 - 30mm ± 0.2mm 30 - 120mm ± 0.3mm ANGLES ±1° NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.	MATERIAL	DRAWN	DATE	TITLE		Amphenol RF www.amphenolrf.com	
	SEE NOTES	JEKY.C	22-Apr-15				
	REFERENCE	ENGINEER	DATE	SCALE: 4.7:1.0		DRAWING NO.69475	
	EAR #	GEFFERY	28-Sep-06				
	CONFIGURATION LEVEL: In Work	APPROVED	DATE	SHEET 2 OF 2		ITEM NO.69475	
	FINISH	H.HE	22-Apr-15	DWG SIZE B		REV AB	
		CAD FILE				PART NO.69475	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) ***category:***

Click to view products by [Amphenol](#) ***manufacturer:***

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6002-7551-202](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39030/3-01N](#) [6500-7071-046](#) [6769](#) [CX050L2AQ](#) [7002-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7010-1511-000](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7105-1521-002](#) [7145-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-019](#) [73137-5015](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [7406-1521-005](#) [8527](#) [8547](#) [FS11V](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [9101-9573-002](#) [910A205F](#) [9130-9573-002](#) [PL11SC-026](#) [PL375-33](#) [PL40-5](#) [PL71-9](#) [PL74C-221](#) [PL75MC-217](#) [PL803-7](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#)