


C-PCIE-4SFP

1Gbs Quad Open SFP Port PCIe 2.0 x4 Network Interface Card

Features

- x4 SFP Port
- Halogen-Free quad-port Gigabit Ethernet adapters with Fiber interface options
- Innovative power management features including Energy Efficient (EEE) and DMA Coalescing for increased efficiency and reduced power consumption
- High-performing bridgeless design supporting PCIe Gen 2.1 5GTps
- <1W S0-Max (State) 1000BASE-T Active 90°C (Mode)
- Smart Power Down (SPD) at S0 no link/ Sx no link
- LAN disable function
- Full wake up support
- Advanced Power Management (APM) Support (Formerly Wake on LAN)
- Advance Configuration and Power Interface (ACPI) specification v2.0c
- Low Power Link Up – Link Speed Control
- Power Management Protocol Offload (Proxying)
- Latency Tolerance Reporting (LTP)

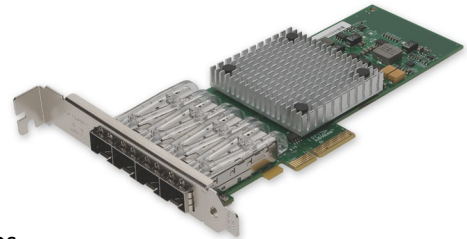

Product Description

This is a Gigabit Ethernet PCIe 2.0 x4 network interface card with quad open SFP ports that comply with IEEE 802.3 standards. It is based on an Intel I350 chipset and is compatible with a variety of different applications and operating systems, including Windows, Linux and Unix-like systems. Providing 1Gbs of network speed, it fully supports high-end servers and various other networking applications. In addition, this card supports high level VLAN filtering. The quad open SFP ports allow users to choose from a range of SFP transceivers to accommodate multi-mode (MMF) and single-mode (SMF) fiber, granting customizable reach. This product includes both half-height and full-height brackets. Our network interface cards are 100% compliant, and offer a cost effective solution for all of your network upgrade needs. With our certification test program, we guarantee your product will work right the first time.

Specifications

Parameter	Specifications
Bus Interface	PCIe 2.1
Bus Width	4 Lane PCIe; Operable in x4, x8, and x16 slots
Data Rate	1000Mbps
Media Type	MMF or SMF
External Connector	SFP
Number of Ports	4 Ports
Interrupt Levels	INTA, INTB, INTC, INTD, MSI, MSI-X
Controller Processor	Internal Ethernet Controller I350AM4
Power Consumption (Typical)	6.0W
Storage Temperature	-40°C to 70°C; -40°F to 158°F
Operating Temperature	-0°C to 55°C; 32°F to 131°F
Storage Humidity	90% Non-Condensing Relative Humidity at 35°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[GX-OD1612](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [FC6A-PH1](#) [EK1122](#) [EL1018](#) [EL1809](#) [EL2622](#) [EL3054](#) [EL3058](#) [EL3062](#) [EL3202](#) [EL4022](#)
[EL4024](#) [EL6002](#) [EL6021](#) [EL6224](#) [EL6631](#) [EL6692](#) [EL6900](#) [EL9011](#) [EL9100](#) [KL1104](#) [KL2404](#) [KL2602-0010](#) [KL3202](#) [KL3208-0010](#)
[KL3458](#) [KL4408](#) [KL6821](#) [KL9100](#) [KL9200](#) [X710T4LBLK](#) [7000-44001-8400500](#) [WC-PD13C033I-1](#) [EL2809-0015](#) [USR-K3](#) [USR-K2](#)
[USR-TCP232-E2](#) [WC-PD13S120B](#) [WC-PD13C012S](#) [WC-PD07H012C](#) [WC-PD25C012T](#) [WC-PD60B120A](#) [WC-PD13C050A](#) [WC-](#)
[PD48B120A](#) [WC-PD30B050A](#) [WC-PSE48-48](#) [WC-PD30B024](#) [WC-PD13S050B](#)