

# 0.50mm Pitch FFC/FPC – F304 Series

## RIGHT ANGLE ZIF FLEX CONNECTOR

F304 series is a 0.50mm pitch right angle ZIF flex connector with a front flip locking mechanism, dual beam and double contact points. It features surface mount termination with a height of 2.50mm and comes in 10 to 60 contacts. This series features a cable thickness of 0.30mm and provides durability of 20 mating cycles. The connectors come with a robust design and prevent solder and flux wicking. These are ideal for automotive, data, industrial, communication, consumer and medical applications.

- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Dual beam and double contact points provide enhanced contact stability
- Ensures high solderability and high durability



### TARGET MARKETS



### FEATURES

- ZIF (Zero Insertion Force) mechanism
- Front flip locking function
- Dual beam and double contact points
- Design against solder and flux wicking
- High-temperature thermoplastic housing
- 10 to 60 positions available
- Lead and halogen-free

### BENEFITS

- Absence of frictional mating wear results in high mating cycle life
- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures enhanced contact stability
- Ensures high solderability
- Wide operating temperature range of -40°C to +105°C
- Comprehensive range to satisfy different customer requirements
- Meets environmental, health and safety requirements

## TECHNICAL INFORMATION

### MATERIAL

- Housing: LCP, natural color (UL94V-0)
- Actuator: PA9T, black color (UL94V-0)
- Contact: Phosphor bronze, T=0.15mm
- Anchor-plate: Brass, T=0.15mm
- Mylar: T=0.10mm, thermostable, yellow color

### MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 40gf/pin
- Terminal Retention Force: 100gf/terminal min.
- Anchor-plate Retention Force: 100gf/plate min.
- Durability: 20 mating cycles

### ELECTRICAL PERFORMANCE

- Voltage Rating: 50V AC/DC
- Current Rating: 0.5A
- Contact Resistance: Initial : 40MΩ max., after each test: 80MΩ max.
- Insulation Resistance: 100MΩ min.
- Dielectric Withstanding Voltage: No short or breakdown after 500V AC, 2mA, 1min.

### PACKAGING

- Tape & Reel

### APPROVALS AND CERTIFICATIONS

- UL file number E106764
- RoHS compliant

### SPECIFICATION

- Aorora Product Specification: IS.EQC.125

### ENVIRONMENTAL

- Operating Temperature Range: -40°C to +105°C

### TARGET MARKETS/APPLICATIONS



Car Multimedia  
Car Navigation  
Dashboard  
PND



Base Station  
Power  
Switches



Notebook  
Tablets  
Wearables  
Gaming  
DSC  
LCD & PDP TV



Router  
Server  
ODD  
HDD




Sensing element  
Monitoring camera  
Human Machine Interface  
Industrial PC  
Robotics



Ultrasonic  
Patient Monitor  
MRI  
CT  
Infusion Pump

## PART NUMBER SELECTOR

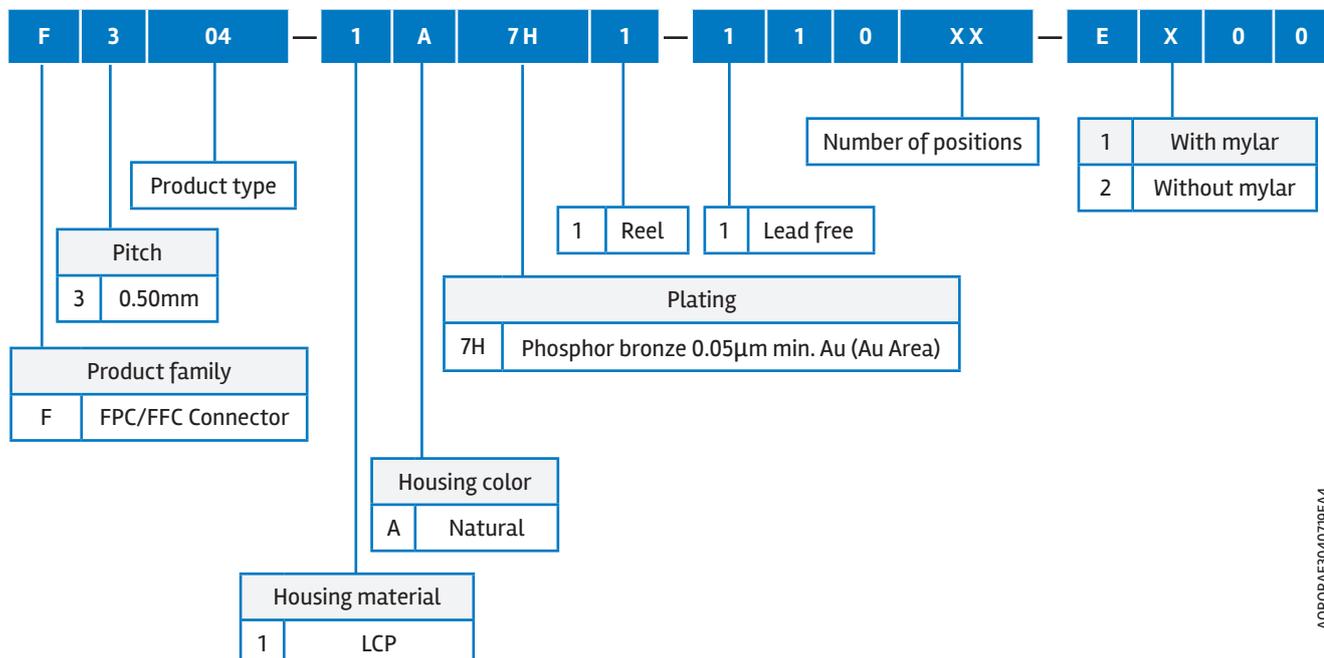

AORORAF304079EA4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [FFC & FPC Connectors](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[K-FC20](#) [FH29B-80S-0.2SHW\(99\)](#) [FPH-2022G](#) [AYF332735](#) [52610-1075](#) [52610-1275](#) [52610-1934](#) [501864-3091-TR225](#) [086222026001800](#)  
[52610-0675](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#)  
[1658549-1](#) [46214008010800](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-014LF](#) [67000-004LF](#)  
[006207341915000+](#) [DS1020-19RT1D](#) [67000-003LF](#) [67000-011LF](#) [67000-016LF](#) [HFW14R-2STE9LF](#) [SFV32R-2STBE9HLF](#) [SFW12R-](#)  
[5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#) [046283021002868+](#) [THD1015-8CL-SN](#) [67000-006LF](#) [502250-8027](#)  
[104267-9617](#) [66987-011LF](#) [AYF362535](#) [F0501-T-50-20T-R](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [67000-012LF](#) [ECC576069EU](#) [F1002-B-](#)  
[20-20T-R](#) [HFW15S-2STAE1HLF](#) [5019511030](#)