


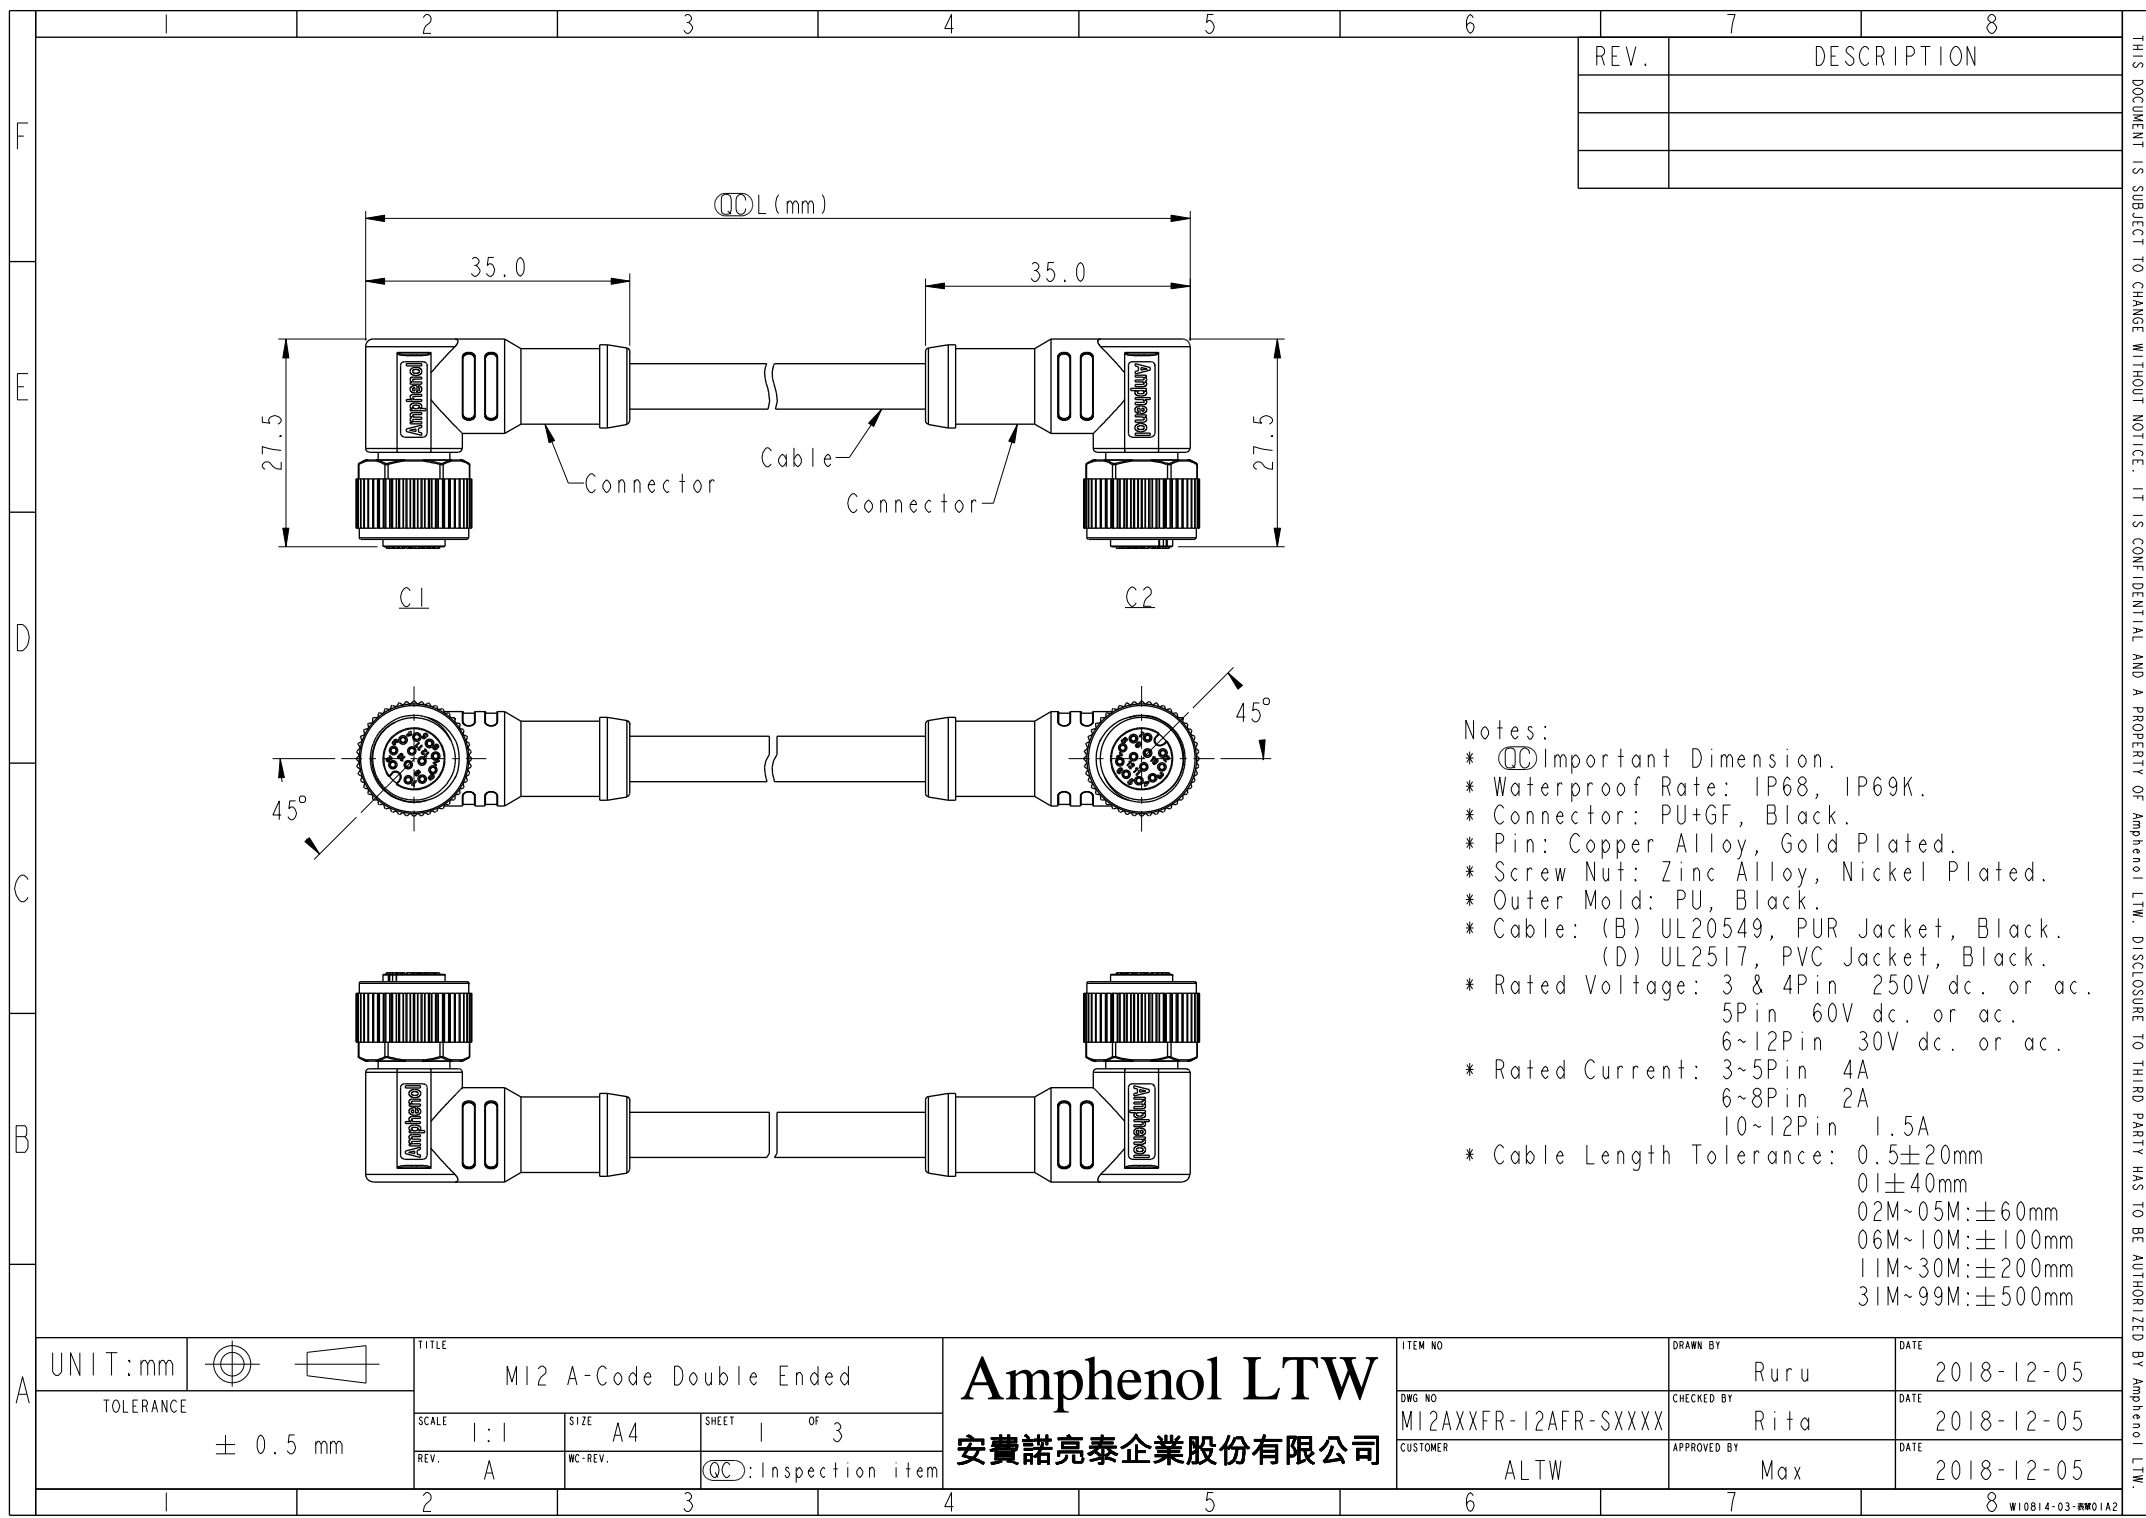

REV.	DESCRIPTION

- Notes:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate: IP68, IP69K.
 - * Connector: PU+GF, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Zinc Alloy, Nickel Plated.
 - * Outer Mold: PU, Black.
 - * Cable: (B) UL20549, PUR Jacket, Black.
(D) UL2517, PVC Jacket, Black.
 - * Rated Voltage: 3 & 4Pin 250V dc. or ac.
5Pin 60V dc. or ac.
6~12Pin 30V dc. or ac.
 - * Rated Current: 3~5Pin 4A
6~8Pin 2A
10~12Pin 1.5A
 - * Cable Length Tolerance: 0.5±20mm
01±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
± 0.5 mm		SCALE		MI2 A-Code Double Ended		安費諾亮泰企業股份有限公司		DWG NO		Ruru		2018-12-05	
REV.		SIZE		A4		SHEET		MI2AXXFR-12AFR-SXXXX		CHECKED BY		DATE	
A		WC-REV.		1		OF		CUSTOMER		Rita		2018-12-05	
QC		Inspection item		ALTW		APPROVED BY		Max		DATE		2018-12-05	
1		2		3		4		5		6		7	
8		9		10		11		12		13		14	

												12P		PVC	6.0	26	MI2A12FR-12AFR-SDXXX	
												10P					MI2A10FR-12AFR-SDXXX	
												8P			5.5	24	MI2A08FR-12AFR-SDXXX	
												6P			5.0		MI2A06FR-12AFR-SDXXX	
												5P			5.1	22	MI2A05FR-12AFR-SDXXX	
												4P			4.8		MI2A04FR-12AFR-SDXXX	
												3P			4.5		MI2A03FR-12AFR-SDXXX	
												12P		PUR	6.0	26	MI2A12FR-12AFR-SBXXX	
												10P					MI2A10FR-12AFR-SBXXX	
												8P			4.8	24	MI2A08FR-12AFR-SBXXX	
												6P			5.0		MI2A06FR-12AFR-SBXXX	
												5P			4.4	22	MI2A05FR-12AFR-SBXXX	
												4P			4.0		MI2A04FR-12AFR-SBXXX	
												3P			3.8		MI2A03FR-12AFR-SBXXX	
Contacts		Cable Jacket		Cable OD		AWG		Item No.										

M

I2A

XX

F

R

-

I2A

F

R

-

S

X

XXX

I2A: A-Code

03: 3Pin

04: 4Pin

05: 5Pin

06: 6Pin

08: 8Pin

10: 10Pin

12: 12Pin

F: Female Connector(母座)

R: Right(90°線端)

XXX: 0.5~99Meters

A05: 0.5 Meter

1: 01 Meter

2: 02 Meters

:

99: 99 Meters

B: PUR UL20549 Cable,Black(PUR黑色外被線材)

D: PVC UL2517 Cable,Black(PVC黑色外被線材)

S: Screw(螺紋式)

R: Right(90°線端)

F: Female Connector(母座)

I2A: A-Code

UNIT:mm				TITLE MI2 A-Code Double Ended			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY Ruru		DATE 2018-12-05		
TOLERANCE ± 0.5 mm		SCALE 1:1		SIZE A4		SHEET 2 of 3			DWG NO MI2AXXFR-12AFR-SXXXX		CHECKED BY Rita		DATE 2018-12-05		
		REV. A		WC-REV.		QC: Inspection item			CUSTOMER ALTW		APPROVED BY Max		DATE 2018-12-05		

[illegible]

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[60963](#) [M83513/19-F01CP](#) [703000D02F2002](#) [703000D02F300](#) [703001D02F1201](#) [704000D02F120](#) [802027213811-1](#) [84914-0235](#)
[883030A09M050](#) [884031A09M005](#) [8R4006A18M010](#) [1200980008](#) [1200980031](#) [1211810021](#) [1400637](#) [1401201](#) [1401348](#) [1405278](#)
[1408644/94F/8](#) [1455311](#) [1513981](#) [1550119](#) [1554212](#) [1R3006A20A120G](#) [1R4004A17A120](#) [1R4006A20A1202](#) [1R4006A39M005](#) [2289297-6](#)
[8R3006A16A1203](#) [8R5E36E03M020](#) [2R7004A20F060](#) [301000A01F200](#) [301002A01F120](#) [2289297-1](#) [2289297-8](#) [2289297-9](#)
[302000A01F120](#) [CONM6A-S2](#) [309000A01F0301](#) [332021A01F200](#) [3R1006A20F030](#) [3R9006A20A1201](#) [403001A10M040](#)
[4030P1A10M040](#) [41-01023](#) [MBCC-412](#) [331020A01F060](#) [1R3G06A20A120](#) [543031A10M010](#) [884030K05M060](#)