

ODC-59 SERIES OVERHEAD DOOR CONTACT



ODC-59 Mini shown

- UL and ULC listed
- 2" operating gap
- HG - 7" Horizontal gap
- 24" stainless steel armored cable
- Adjustable, aluminum L bracket
- Hermetically sealed reed switch

Application

The ODC-59 Series Overhead Door Contacts are exclusively designed for rugged high traffic installations. The reed switch is hermetically sealed with a PVC shock absorber enclosed within a solid aluminum housing. Installation wires are protected in a 24" stainless steel armored cable. The ODC-59 Series magnet is mounted on an adjustable L shaped bracket designed for greater flexibility, universal mounting, greater pulling power, and to provide a professional installation appearance.

The ODC-59-HG (horizontal gap) is designed as a solution for damaged or loose fitting doors.


The ODC-59 MINI offers all the same great features in a smaller size for greater installation flexibility. (Not ULC listed)

ODC-59 Wiring Designations

With Magnet Installed:

Red = Normally-Open (N.O.)	Black = Common (Com)	Green = Normally-Closed (N.C.)
----------------------------	----------------------	--------------------------------

Dimensions

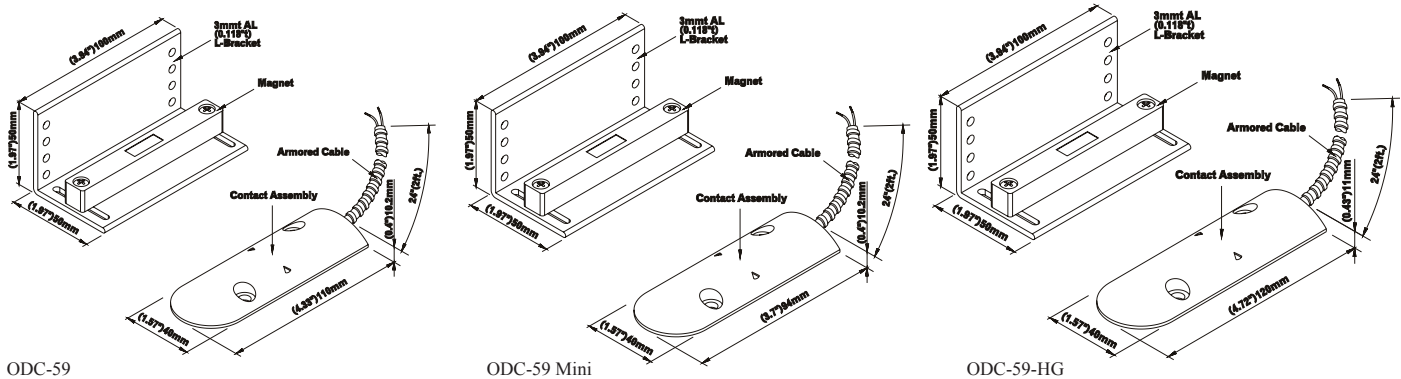

Ordering Information

Model	Stock Number	Contact	Contact Rating	Contact Type	Max. Carry Current	Max. Switching Current	Breakdown Voltage	Operating Gap	Temperature Range
ODC-59A	4410003	22AWG 24" Leads	10VA	Form A N.O.	2 Amp	.5 Amp	250VDC	2"	32°F - 120°F (0°C - 49°C)
ODC-59A-36	4410004	22AWG 36" Leads							
ODC-59B	4410006	22AWG 24" Leads	3VA	Form C N.O./N.C.	.5 Amp	.2 Amp	150VDC		
ODC-59A-HG	4410018		10VA	Form A N.O.	2 Amp	.5 Amp	250VDC		
ODC-59B-HG	4410019		3VA	Form C N.O./N.C.	.5 Amp	.2 Amp	200VDC		
ODC-59A-MINI	4410017		10VA	Form A N.O.	2 Amp	.5 Amp	250VDC		
Accessories	4350178	Magnet and L bracket							

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Magnetic/Reed Switches](#) category:

Click to view products by [Amseco](#) manufacturer:

Other Similar products are found below :

[AMS-20MG](#) [AMS-37-G_W/Brk](#) [AMS-38S-I](#) [AMS-39B-W](#) [AMS-10S-B](#) [AMS-25A-I](#) [AMS-38MG](#) [AMS-38SB](#) [AMS-9-B](#) [AMS-T10C\(B\)](#)
[505-171W WHITE](#) [505-211B](#) [505-391G](#) [505-70B](#) [507-382B](#) [BMC-33B](#) [505-101BC](#) [505-101-GC](#) [505-101-WS](#) [505-201W](#) [505-5114B](#)
[BROWN](#) [505-90G](#) [505-90I](#) [507-381BB](#) [TSW-2T](#) [AMS-10MGW](#) [631.4212.695](#) [631.4226.700](#) [630.5121.064](#) [SW GP100/10-15 AT](#) [PSW-21-](#)
[I 4360005](#) [NRC-22-I](#) [KSK-1A66-2030](#) [44531-0200](#) [44531-0260](#) [44531-0710](#) [MK28-1A-500W](#) [MK28-1B-500W](#) [511-59A](#) [35-756](#)
[D40MLCBLM1210M](#) [D40MLCBLM125M](#) [D40PMPC2105R](#) [D40PSPC2105](#) [KSK-1A52-1520](#) [KSK-1A87-2025](#) [KSK-1C90U-1530](#) [KSK-](#)
[1E661-BV14501](#) [KSK-1E85-BV470](#)