


Chip Termination 10 Watts, 50Ω



Features:

- RoHS Compliant
- 10 Watts
- DC 6.0 GHz
- Al₂0₃ Ceramic
- Non Nichrome Resistive Element
- Low VSWR
- 100% Tested
- Small Size

Description

The 060120A25X50-2 is high performance Alumina (Al_2O_3) Chip termination intended as a low cost alternative to Aluminum Oxide (AlN). The termination is well suited to all cellular frequency bands such as; AMPS, GSM, DCS, PCS, PHS and UMTS.. The termination is also RoHS compliant!

General Specifications

Resistive Element Thick film

Substrate Al₂O₃ Ceramic

Terminal Finish Matte Tin over Nickel Barrier

Operating Temperature -55 to +125°C (see de rating chart)

Tolerance is ±0.010", unless otherwise specified. Designed to meet or exceed applicable portions of MIL-E-5400. **All dimensions in inches.**

Electrical Specifications

Resistance Value: 50 Ohms, \pm 2%


 Power:
 10 Watts

 Frequency Range:
 DC – 6.0 GHz

 Return Loss
 >19 dB to 6.0 GHz

Specification based on unit properly installed using suggested mounting instructions and a 50 ohm nominal impedance. **Specifications subject to change.**

Outline Drawing

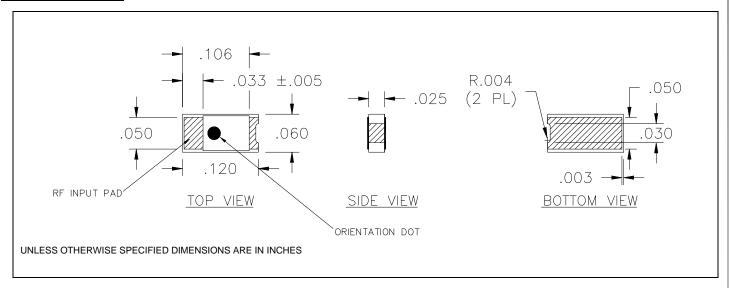


1 of 2




USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392




Typical Performance:

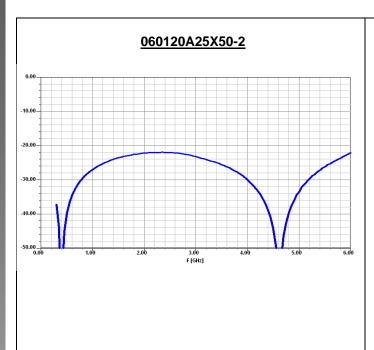


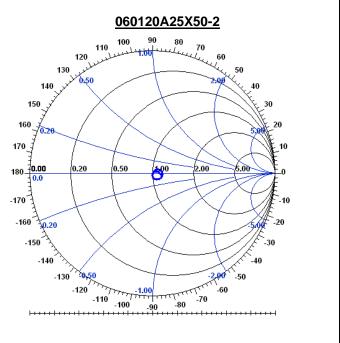

Power De-rating:

Mounting Footprint and Procedure:

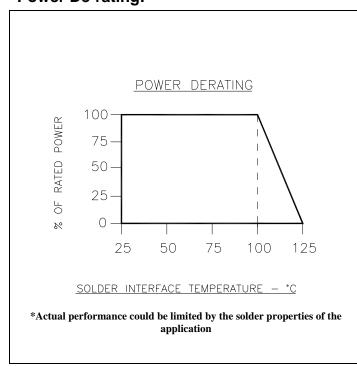

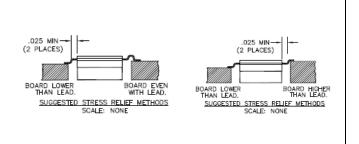

SUGGESTED MOUNTING PROCEDURES:

1. MAKE SURE THAT THE DEVICES ARE MOUNTED ON FLAT SURFACES TO OPTIMIZE THE HEAT TRANSFER.

2. RECOMMENDED FLATNESS UNDER THE DEVICE IS 0.002".

2 of 2

USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for High Frequency/RF Resistors category:

Click to view products by Anaren manufacturer:

Other Similar products are found below:

800-50T-S 10-100RV-S E250N50X4 250-100RM-S 250-50RM-S 150-100RL-S A4B50X1A 10-50TV G150N50W4B FC1206E8450FGW0
R1A06031000G5AR 060120A25X50-2 C45N50Z4 A5B50X1A 100200-4Z50-2 C150N50Z4 30-100R 60-50TP-S 100N50TW
E200N50X4 250375-4Z50-2 60-50TPR MIC1000AFLMGNHWS FT10301N0050J CS12010T0100GTR C8A50Z4B CW12010T0100GTR
FR10515N0050JBK FR10515N0100JBK FR10800N0100JBK FT10517N0050J01 FT10517N0050JBK FT10800N0050J02
LT11020T0050JBK LT12010T0050JBK 250375-4X50-2 30-100R-S 400-50T 40-50TP 60-50TP C10A50Z4 C16A50Z4 C1A50Z4
C50A50Z4 G250N50W4 G450N50W4 J100N50X4B K100N50X4B R2B130850R0J4J0 R3A100550R0J5G0