
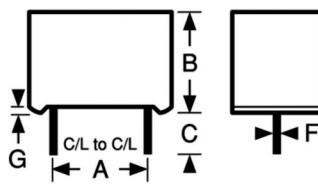


**SERIES****3443R  
3443****Radial Lead Power Chokes**

Actual Size (Max.)

**Physical Parameters**

	Inches	Millimeters
A	$0.500 \pm 0.015$	$12.72 \pm 0.38$
B	0.600 Max.	15.27 Max.
C	0.375 Min.	9.54 Min.
D	0.870 Max.	22.14 Max.
E	0.515 Max.	13.10 Max.
F**	$0.040 \pm 0.005$	$1.02 \pm 0.13$
G	0.030 Min.	0.76 Min.

\*\*F= AWG #18 TCW

**Current Rating** Based on continuous operation at room temperature. Derating is required at elevated ambient temperatures in accordance with the derating curve.

**Operating Temperature Range**  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ **Maximum Power Dissipation at  $25^{\circ}\text{C}$**  2.2 W**Weight Max.** (Grams) 12.0

**Incremental Current 1)** Current Level which causes a maximum of 10% decrease in inductance. **2)** The Incremental Current at ambient temperatures other than  $25^{\circ}\text{C}$  will be 70% of the adjusted current rating.

**Marking** DELEVAN; part number without the tolerance letter, inductance with units. Note: An R after 3443 indicates a RoHS component.

Example: 3443-00K

DELEVAN

3443-00


1uH

**Packaging** Bulk only

DASH NUMBER\*      INDUCTANCE (@ 1 kHz)  $\mu\text{H} \pm 10\%$       DC RESISTANCE MAXIMUM (OHMS)      CURRENT RATING MAXIMUM (AMPS)      INCREMENTAL CURRENT DC (AMPS)

SERIES 3443 FERRITE CORE				
-00K	1.0	0.005	17.8	17.8
-04K	1.5	0.006	16.2	16.2
-08K	2.2	0.007	15.0	15.0
-12K	3.3	0.008	14.0	12.4
-16K	4.7	0.009	13.0	10.3
-20K	6.8	0.010	12.5	8.9
-24K	10.0	0.015	10.0	7.3
-28K	15.0	0.022	8.5	5.9
-32K	22.0	0.033	6.5	4.9
-36K	33.0	0.052	5.5	4.0
-40K	47.0	0.078	4.5	3.3
-44K	68.0	0.092	4.0	2.8
-48K	100.0	0.140	3.3	2.3
-50K	120.0	0.175	3.0	2.1
-52K	150.0	0.210	2.7	1.9
-56K	220.0	0.330	2.2	1.5
-58K	270.0	0.420	1.95	1.35
-60K	330.0	0.510	1.70	1.20
-64K	470.0	0.610	1.60	1.00
-68K	680.0	0.910	1.30	0.90
-72K	1000.0	1.40	1.00	0.73
-76K	1500.0	2.20	0.84	0.60
-80K	2200.0	3.30	0.69	0.49
-84K	3300.0	5.10	0.55	0.40
-88K	4700.0	7.70	0.45	0.34
-92K	6800.0	11.7	0.36	0.28
-94K	10000.0	14.2	0.33	0.23
-98K	15000.0	21.9	0.26	0.19

\*Complete part # must include series # PLUS the dash #

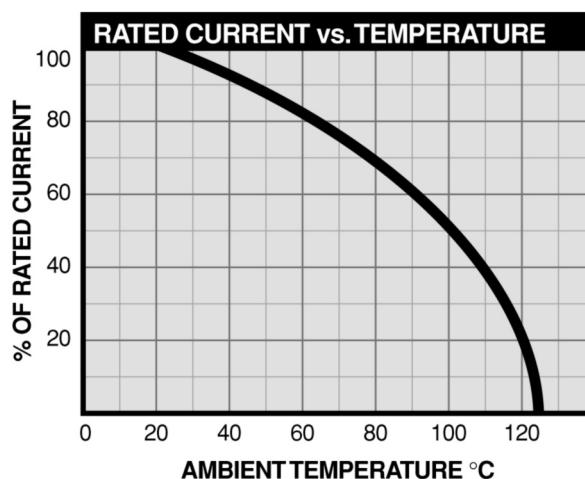

For more detailed graphs, contact factory

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Fixed Inductors category:***

***Click to view products by API Delevan manufacturer:***

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)  
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)  
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)  
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)