


SPECIFICATIONS

Elastomer: Silicone conforms to A-A-59588, Class 3A, GR50. Color to be specified.
Temperature Range: -103° F to +400° F (-75° C to +204° C)
Shelf Life: Excess of 25 years.
Resistant to: Splash, salt spray, sunlight, ozone, weather, fungus, dust, and most acids and lubricating oils.
Physical Characteristics: Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering.

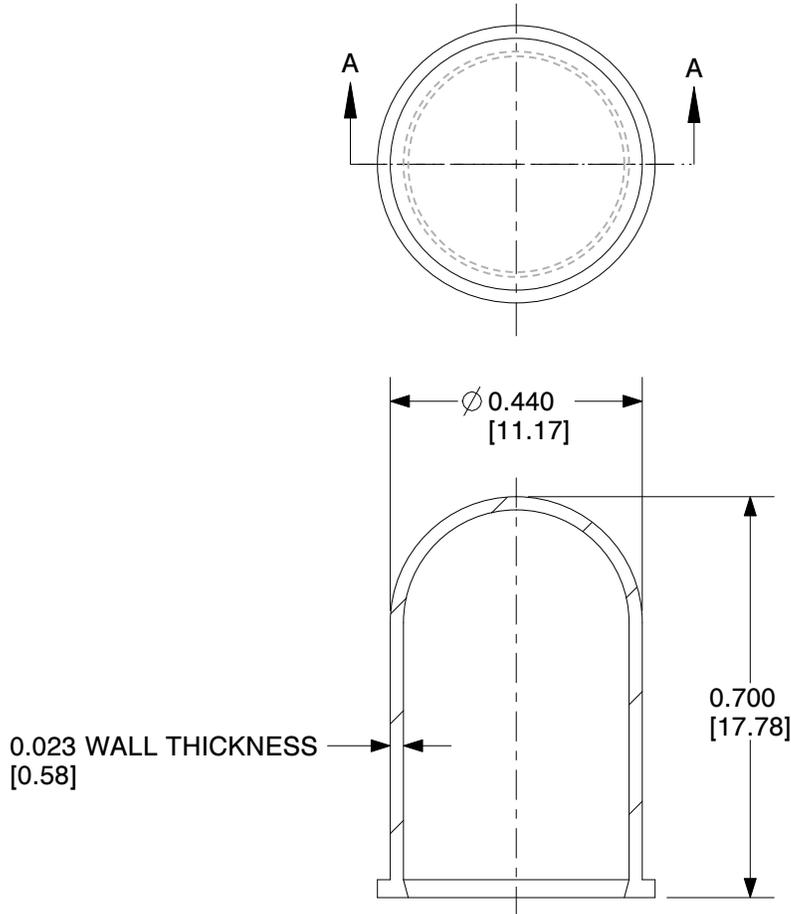

SECTION A-A

NOTES:

1. REACH, RoHS, PROP 65 DECLARATIONS.

D	ECO-22-0004: CHANGED DIM ϕ 7/16" TO ϕ .440, CHANGED DIM 11/16" TO .700". UPDATE MATERIAL SPECIFICATIONS, DRAWING FORMAT, AND ADDED DRAWING NOTES. DWN: DAN LAW CHKD: LP 02/09/22	02.03.22
C	REDRAWN and MAT'L CHANGED	S. GOK 05.28.09
B	CAD COMPUTER GENERATED	01.10.03
A	ADDED 15° - 11/16 WAS 5/8	01.06.64

REV.	DESCRIPTION	DATE
TOLERANCES UNLESS OTHERWISE NOTED .X ±0.1 .XXX ±0.005 .XX ±0.01 < ±1.0° FOR RUBBER PORTION ONLY: RMA "A3" COMMERCIAL DIMENSIONS ARE IN INCHES		ENG. S .GOK 05.28.09 DWN. ED 01.22.63 CHKD. J. CELLA 05.28.09
MATERIAL & FINISH: SEE SPECIFICATIONS		SCALE 3.000 DWG. NO. 1813/8

TITLE:
 SILIKROME®, FILTER, COLORED,
 FOR INCANDESCENT T-1 3/4 LAMPS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamp Lenses](#) category:

Click to view products by [APM manufacturer](#):

Other Similar products are found below :

[801-0334-500](#) [812-0974](#) [140-1475-003](#) [151-2900-200](#) [199-5261](#) [221-1131-203](#) [222-0113-303](#) [222-0135-203](#) [270-0121](#) [221-1132-203](#) [222-0135-303](#) [22872.9](#) [39-02-4A](#) [39-02-6A](#) [39-08-3A](#) [39-08-4A](#) [39-12-1A](#) [39-02-3A](#) [39-06-4A](#) [39-12-2A](#) [402-0172-100](#) [402-0175-100](#) [053-0992](#) [053-0993](#) [053-0994](#) [091-0931](#) [091-0971](#) [091-0932](#) [103-1233-403](#) [533-0001](#) [270-0212](#) [359-8430-0932-502](#) [0190535300](#) [0510113303](#) [39-06-2A](#) [199-5263](#) [241-0001-804](#) [830-1432-003](#) [39-08-7A](#) [271-0171](#) [047-2900-400](#) [39-04-4B](#) [1813/8 R14-13](#) [BB4-NR](#) [BF2.4/RC](#) [128-0931-003](#) [39-02-5A](#) [162-0932](#) [177-0932-003](#) [160-0111-203](#)