



ESG Panel mount buzzer

- Ø 65 mm panel-mount buzzer
- Max. 105 dB (A) sound pressure, infinitely adjustable
- High degree of protection IP 65
- Panel size Ø 22.5 mm/M22
- 3 easily distinguishable tones
- User-friendly connection technology
- For industrial and general applications
- Adapter available for M30.5 mm panel size



TECHNICAL DATA

Housing	Ø 65 mm Polycarbonate black (RAL 9005) or grey (RAL 7035)
Type of mounting	any
Panel size	22 mm (M22) and 30.5 mm (with adapter)
Connection technology	plug-in screw terminal bis 2,5 mm²
Leakage current	0,003 A
Tone	3 Tones, 3 Tones can be switched externally, Steady tone, Pulsing tone or Alternating
Volume	85-105 dB (can be adjusted with potentiometer)
Tone frequency	3.300 Hz
Duty cycle	100 %
Operating temperature	-25 °C / +60 °C
Degree of protection	IP65 & UL Type 4/4x/13
Weight	65 g

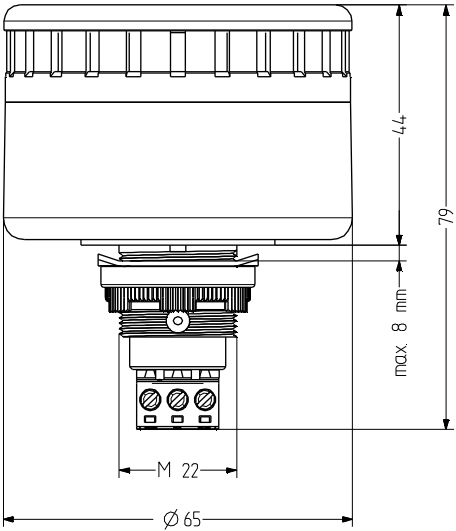

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Buzzers & Audio Indicators - Industrial](#) ***category:***

Click to view products by [Auer Signal](#) ***manufacturer:***

Other Similar products are found below :

[ESZ-26B](#) [ESZ-25B-5-250B](#) [EWP-202C](#) [EBPT-407](#) [BRP2212L-12-C](#) [CPT-1604-10L100](#) [56-61000-00.22](#) [AI-2628-TF-LW100-WP-R](#)
[4890060](#) [PK-27A35EWBQ](#) [ZT016LDCTR](#) [ZT016LDSR8R](#) [22MMGASKET](#) [SCE028LD3CL1F](#) [SSX-82SC](#) [ZT028LAFP1Y](#) [SSX-82SA](#)
[SCS045MD1MGCS](#) [XB5KSB](#) [713100113](#) [PT-723B-76Q](#) [PT-593SQ](#) [PK-35H29WQ](#) [PK-26N04W-06VQ](#) [PK-26N04W-03VQ](#) [PK-](#)
[27N35EPQ](#) [PK-26N04W-24VQ](#) [PNR1](#) [ACC02](#) [710100113](#) [PB-32N10W-12K](#) [SC628AHJR](#) [ZA048SADP2](#) [SCH110NR](#) [SSX-52SB](#) [SSX-](#)
[82SR](#) [AI-4429-P-CP12-2-R](#) [M22-AMC](#) [PK-27A35EPDGQ](#) [PK-27A35EPDBQ](#) [PK-35A29W-24VQ](#) [14-810.910](#) [SC648](#) [SC628AN](#) [SC628N](#)
[SC110N](#) [SC628ANP](#) [HW1Z-P1F2PQ4Y](#) [PFD-27A35ERQ](#) [BNR1](#)