


Features

Sealed IP67, IP68, and IP69K lighting for use with Vision Systems in washdown environments

To view or download the latest technical information about this product, including specifications, dimensions, accessories, and wiring, go to www.bannerengineering.com.

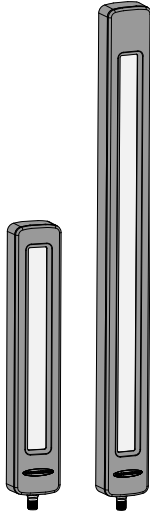

- Four high-intensity, visible wavelengths, plus IR and UV
- Oil, chemical, and water resistant with IP67, JIS C IP68G, and IP69K per DIN 40050-9
- Available in 340 mm and 640 mm lengths
- Highly resistant to vibration and shock
- High-power, solid-state LED array; continuous or strobed operation
- PNP and NPN strobe operation
- Black e-coated aluminum housing

Model Key

Family	Color	Length (mm)	Window	Lensing	Control	Sealed	Connection
BL60	W	340		L14	A	S	Q
	W = Daylight white (5000K) R = Red G = Green B = Blue I = Infrared UV365 = 365 nm Ultraviolet UV395 = 395 nm Ultraviolet	340 640	Blank = Clear polycarbonate D = Diffused polycarbonate G = Borosilicate glass	Visible and IR Models: L14 = 14-degree FWHM narrow lenses UV Models: L30 = 30-degree FWHM wide lenses	A = Adjustable PWM/Strobe and 1 V to 10 V dimming	S = Sealed	Q = Integral 5-pin M12 male quick-disconnect connector

The following caution applies to white LED models and blue LED models:



CAUTION:

Risk Group 2: Possibly hazardous optical radiation emitted from this product.

Do not stare at the operating lamp. May be harmful to the eyes. Risk Group 2 (RG 2) products generally do not pose a realistic optical hazard if aversion responses limit the exposure duration or where lengthy exposures are unrealistic.

- IEC 62471

The following caution applies to ultraviolet models:



CAUTION:

Risk Group 2: UV Emitted from this product.

Eye or skin irritation may result from exposure. Use appropriate shielding and eye protection. Risk Group 2 (RG 2) products generally do not pose a realistic optical hazard if aversion responses limit the exposure duration or where lengthy exposures are unrealistic.

- IEC 62471

The following caution applies to infrared models:

CAUTION:
Risk Group 1: IR Emitted from this product.



Use appropriate shielding or eye protection. Risk Group 1 (RG 1) products are safe for most use applications, except for very prolonged exposures where direct ocular exposures may be expected.

- IEC 62471

Wiring

Pinout	Pin Number	Wire Color	1 V to 10 V Analog Dimming and Strobing/PWM Dimming Models
	Pin 1	Brown	12 V DC to 30 V DC
	Pin 2	White	NPN PWM/Strobe Input: For maximum intensity, leave the white wire floating, or connect to 12 V DC to 30 V DC. Connecting to DC common causes the LEDs to shut off.
	Pin 3	Blue	DC common
	Pin 4	Black	PNP PWM/Strobe Input: For maximum intensity, leave the black wire floating, or connect to DC common. Connecting to 12 V DC to 30 V DC causes the LEDs to shut off.
	Pin 5	Gray	1 V DC to 10 V DC Analog Dimming

Specifications

Supply Voltage

12 V DC to 30 V DC

Use only with a suitable Class 2 power supply (UL) or SELV power supply (CE)

See the electrical characteristics on the product label.

Supply Protection Circuitry

Protected against reverse polarity and transient voltages

Pulse Width Modulation (PWM)/Strobe Control

Maximum Frequency: 30 kHz

Minimum On Time: 20 μ s

Input Delay Time: 5 μ s

Input Voltage Threshold:

PNP: > 7 V DC

NPN: < 2 V DC

Input Current Maximum: 5 mA

Analog Control

Intensity Adjustment Range: 10% to 100%

Input Voltage Range: 1 V DC to 10 V DC

Input Current Maximum: 5 mA

Construction

Housing: Black e-coated aluminum housing

Window: Clear or diffuse polycarbonate window, or clear borosilicate glass window

Mounting

(6) M6×1 threaded holes in back; multiple bracket options available

Connections

Integral 5-pin M12 male quick-disconnect connector, accessory cordset required

LED Lifetime

Lumen Maintenance: L70

When operating within specifications, the output decreases less than 30% after the following time periods:

Daylight White: 90,000 hours

Red: 70,000 hours

Green: 70,000 hours

Blue: 50,000 hours

Yellow: 60,000 hours

UV: 35,000 hours

Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 1.0 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 15G 11 ms duration, half sine wave)

Operating Conditions

−40 °C to +50 °C (−40 °F to +122 °F)

Storage Temperature

−40 °C to +70 °C (−40 °F to +158 °F)

Environmental Rating

IP67, JIS C IP68G, IP69K per DIN 40050-9

Required Overcurrent Protection



WARNING: Electrical connections must be made by qualified personnel in accordance with local and national electrical codes and regulations.

Overcurrent protection is required to be provided by end product application per the supplied table.

Overcurrent protection may be provided with external fusing or via Current Limiting, Class 2 Power Supply.

Supply wiring leads < 24 AWG shall not be spliced.

For additional product support, go to www.bannerengineering.com.

Supply Wiring (AWG)	Required Overcurrent Protection (A)	Supply Wiring (AWG)	Required Overcurrent Protection (A)
20	5.0	26	1.0
22	3.0	28	0.8
24	1.0	30	0.5

Certification



Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



Turck Banner LTD Blenheim House
Blenheim Court
Wickford, Essex SS11 8YT
GREAT BRITAIN



Supply Current

Light Length (mm)	Color	Max. Current Draw (A) at 12 V DC	Typical Current Draw (A)		
			12 V DC	24 V DC	30 V DC
340	White	1.6	1.290	0.600	0.485
	Red	1.6	0.965	0.460	0.375
	Green	1.6	1.100	0.525	0.425
	Blue	1.6	1.175	0.550	0.445
	Infrared	1.6	0.680	0.340	0.280
	365 nm UV	1.6	1.525	0.695	0.560
	395 nm UV	1.6	1.355	0.625	0.500
640	White	3.0	2.475	1.130	0.910
	Red	3.0	1.845	0.880	0.720
	Green	3.0	2.005	0.955	0.780
	Blue	3.0	2.135	1.005	0.820
	Infrared	3.0	1.270	0.635	0.525
	365 nm UV	3.0	2.815	1.280	1.040
	395 nm UV	3.0	2.555	1.180	0.955


FCC Part 15 Class B for Unintentional Radiators

(Part 15.105(b)) This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

(Part 15.21) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Dimensions

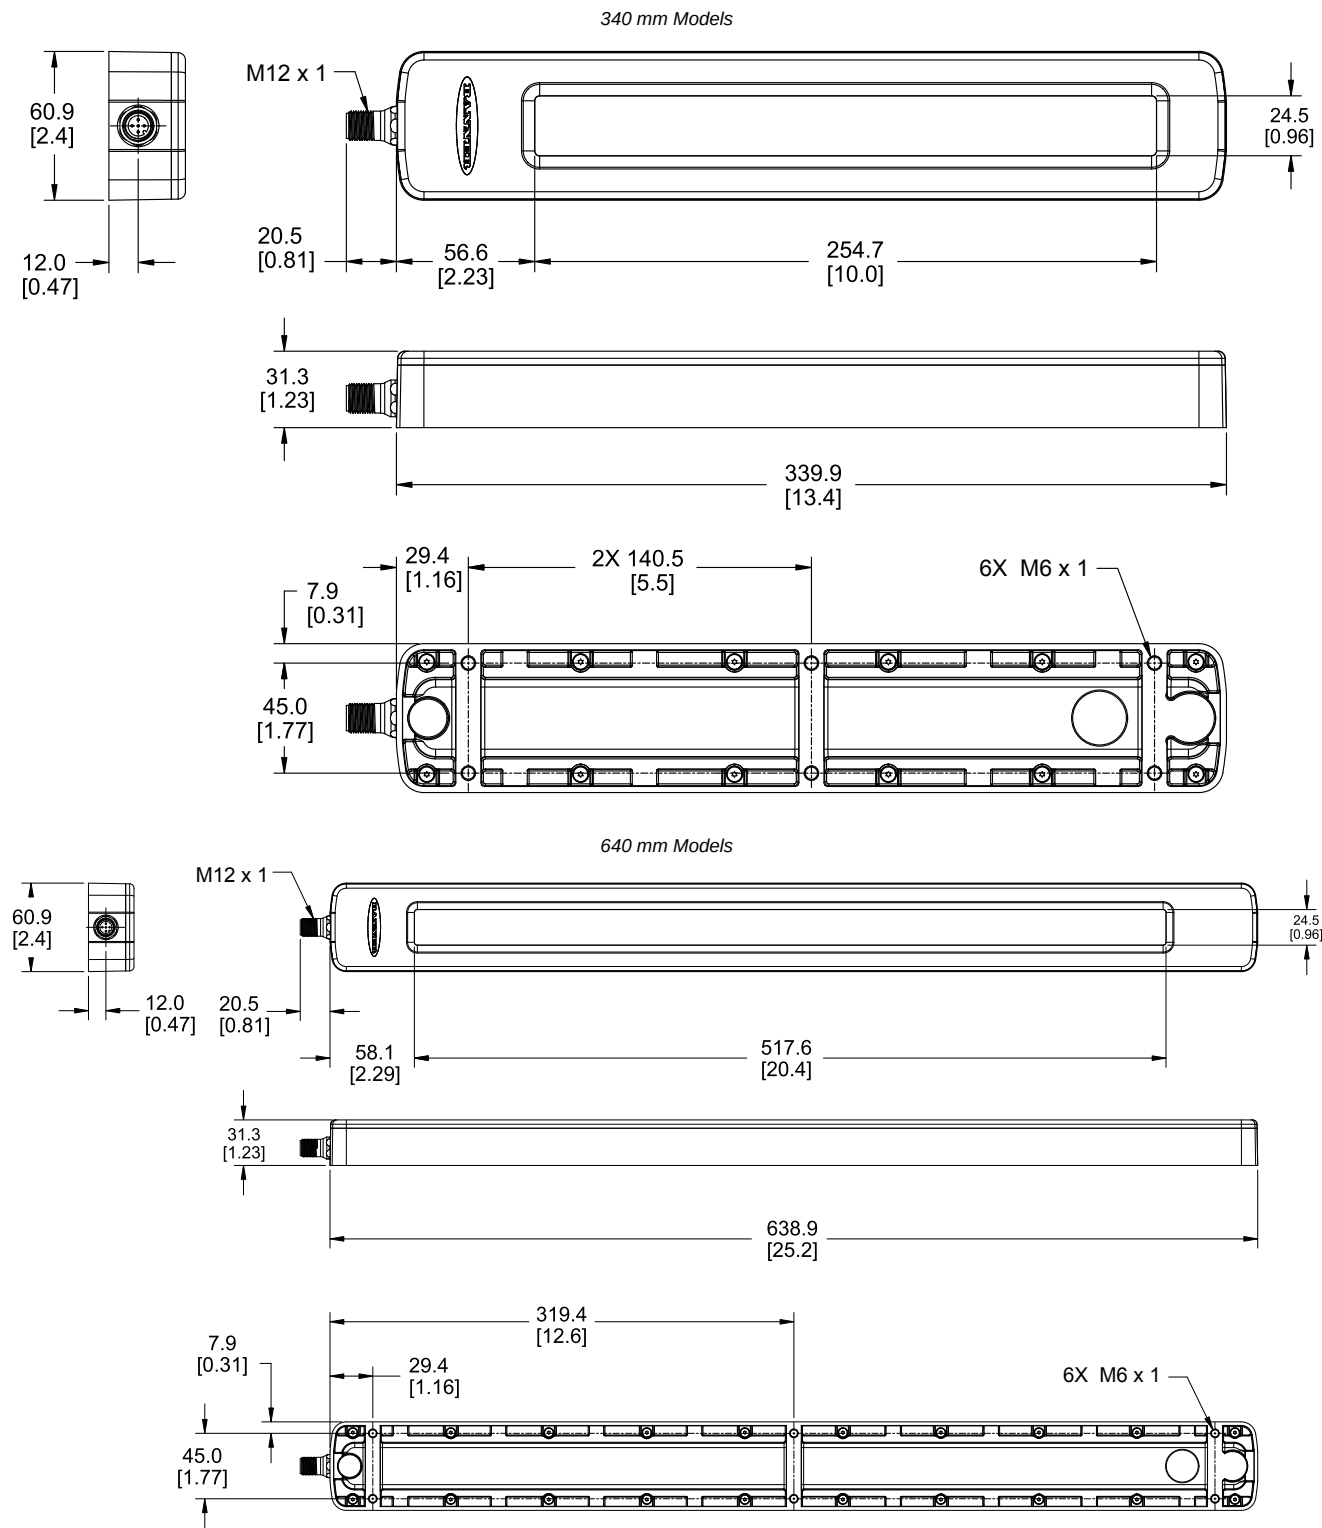

Optical Data

Light Characteristic: Clear and Diffuse Window

Values shown are typical at 25 °C.

Lighted Length (mm)	Lumens				mWatts		
	Daylight White (5000K)	Green (525nm)	Red (625nm)	Blue (475nm)	UV365 (365nm)	UV395 (395nm)	IR (850nm)
340	1375	1025	650	300	2500	2750	2450
640	2600	1950	1275	575	4600	5000	4550

Photometric Data


Optical data shown below is for daylight white and UV 365nm models only. To get lux/irradiance and candela/radiant intensity values for models with other colors, multiply the values shown on the charts by the following factors:

Color	Multiplier
Green	0.750
Red	0.473
Blue	0.218
UV395	1.100
IR	1.782


340 mm White Clear Window

BL60 White Clear (340)

Polar Candela Distribution

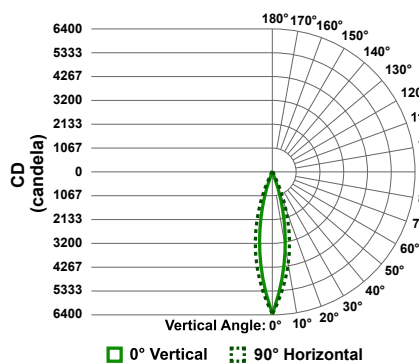

Isolux Pattern

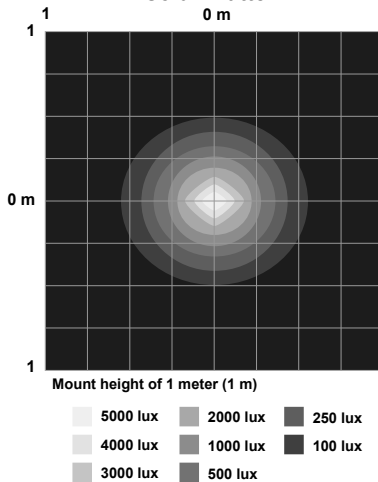




Illuminance at a Distance

	Center Beam (lux)	Beam Width (m)
0.17 m	78820 lux	0.06 m 0.08 m
0.33 m	36450 lux	0.12 m 0.15 m
0.50 m	20710 lux	0.18 m 0.22 m
0.67 m	13490 lux	0.24 m 0.30 m
0.83 m	9460 lux	0.30 m 0.37 m
1.00 m	6349 lux	0.36 m 0.45 m

Vertical Spread: 20.4°
Horizontal Spread: 25.3°




640 mm White Clear Window

BL60 White Clear (640)

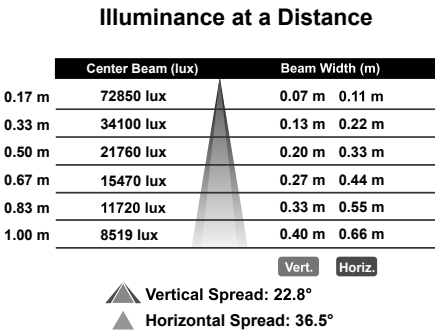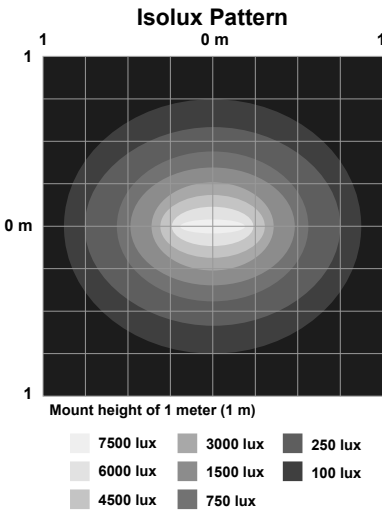
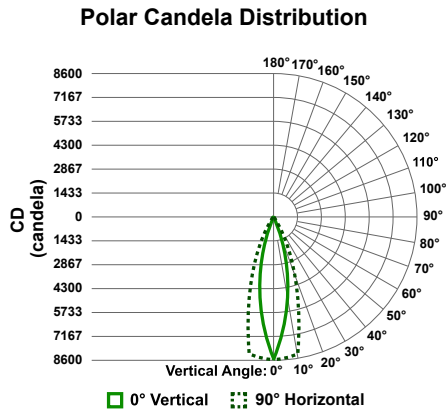


340 mm White Diffuse Window


BL60 White Diffuse (340)

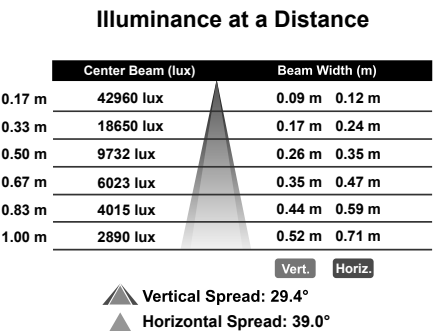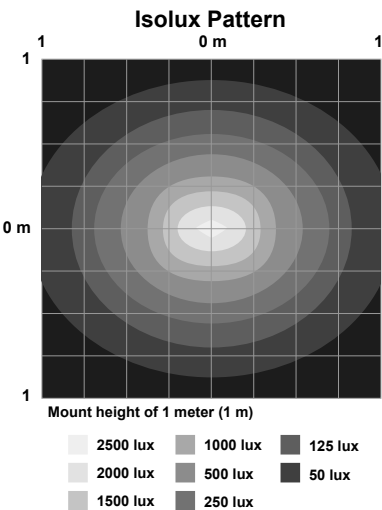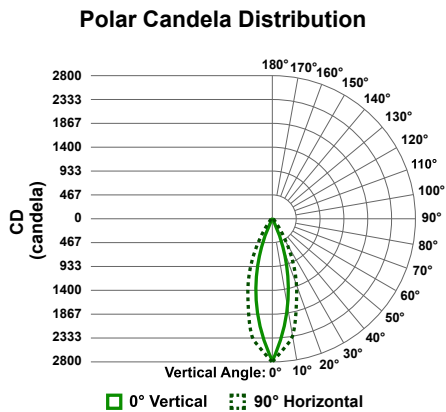



640 mm White Diffuse Window

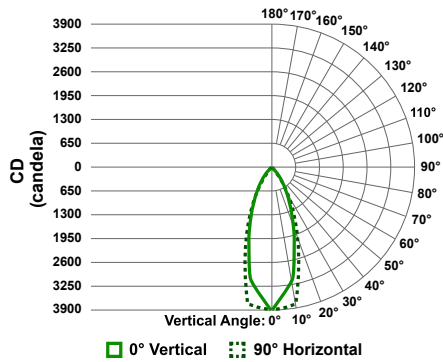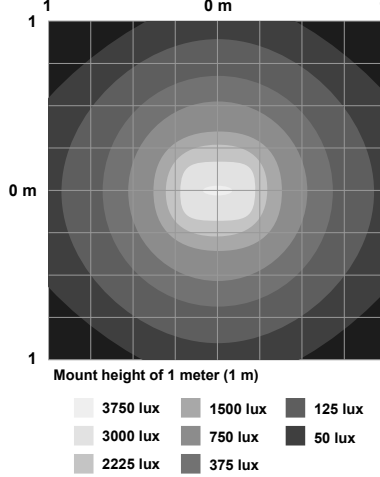BL60 White Diffuse (640)**Polar Candela Distribution****Isolux Pattern****Illuminance at a Distance**


	Center Beam (lux)	Beam Width (m)
0.17 m	38200 lux	0.11 m 0.12 m
0.33 m	18040 lux	0.23 m 0.25 m
0.50 m	11090 lux	0.34 m 0.37 m
0.67 m	8305 lux	0.46 m 0.50 m
0.83 m	5519 lux	0.57 m 0.62 m
1.00 m	3950 lux	0.69 m 0.74 m



340 mm UV365

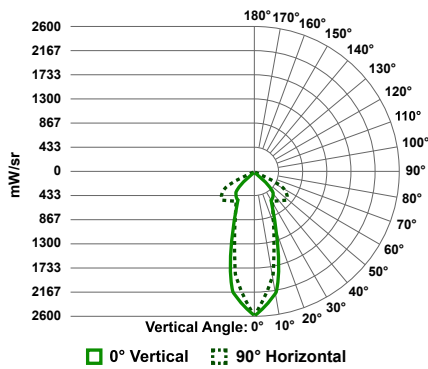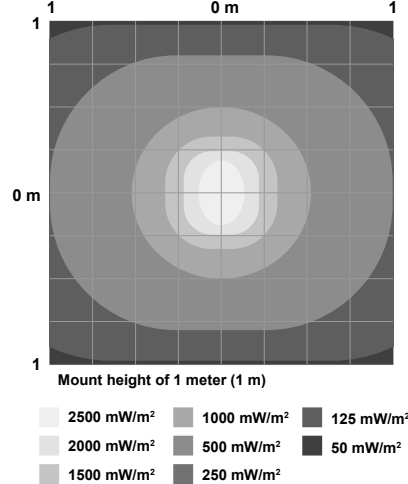BL60 UV365 Clear (340)**Polar Radiant Intensity Distribution****Iso-irradiance Pattern****Irradiance at a Distance**


	Center Beam (lux)	Beam Width (m)
0.17 m	25900 mW/m²	0.10 m 0.10 m
0.33 m	12540 mW/m²	0.21 m 0.20 m
0.50 m	7430 mW/m²	0.31 m 0.31 m
0.67 m	4700 mW/m²	0.42 m 0.41 m
0.83 m	3500 mW/m²	0.52 m 0.51 m
1.00 m	2500 mW/m²	0.63 m 0.62 m




640 mm UV365

BL60 UV365 Clear (640)


Polar Radiant Intensity Distribution

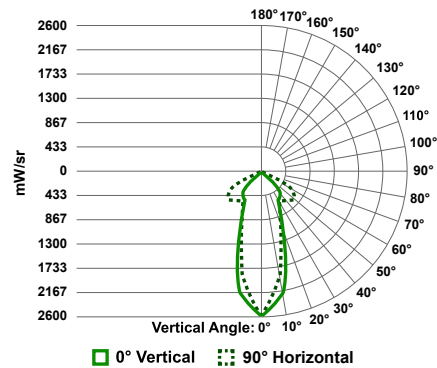

Iso-irradiance Pattern

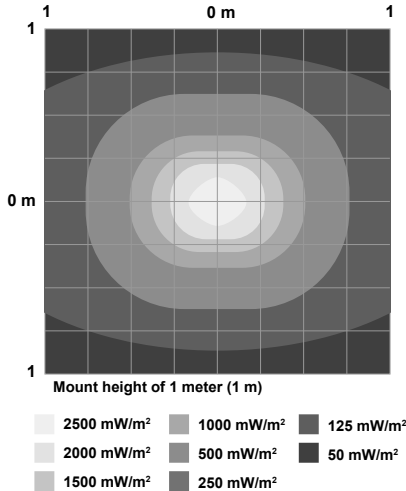



Irradiance at a Distance

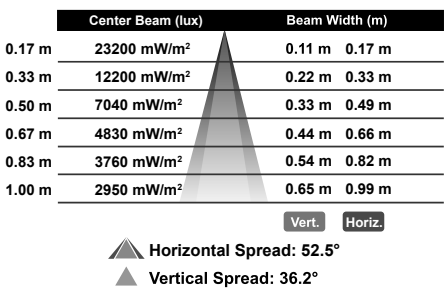

Accessories

Cordsets


5-Pin Threaded M12 Cordsets—Single Ended				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC1-501.5	0.5 m (1.5 ft)	Straight		
MQDC1-503	0.9 m (2.9 ft)			
MQDC1-506	2 m (6.5 ft)			
MQDC1-515	5 m (16.4 ft)			
MQDC1-530	9 m (29.5 ft)			
MQDC1-560	18 m (59 ft)			
MQDC1-5100	31 m (101.7 ft)	Right-Angle		1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray
MQDC1-506RA	2 m (6.5 ft)			
MQDC1-515RA	5 m (16.4 ft)			
MQDC1-530RA	9 m (29.5 ft)			
MQDC1-560RA	19 m (62.3 ft)			

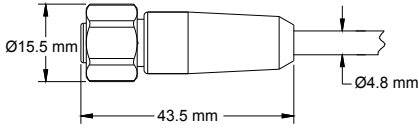5-Pin Threaded M12 Stainless Steel Washdown Cordsets—Single Ended				
Model	Length	Style	Dimensions	Pinout (Female)
MQDC-WDSS-0506	2 m (6.56 ft)	Straight		
MQDC-WDSS-0515	5 m (16.4 ft)			
MQDC-WDSS-0530	9 m (29.5 ft)			

Brackets


LMBWLC60F

- Set of two flat brackets
- 300 series stainless steel
- Includes M6 flathead screws for mounting to light
- Clearance for M6 or 1/4-20 mounting hardware




LMBWLC60MAG

- Magnetic mounting kit (set of two)
- Two-inch magnets
- Mounting hardware included




LMBWLC60B340

- Plate for sealing the cavity on the back of the 340 mm models
- 300 series stainless steel
- Includes hardware for mounting to the light




ACC-WLC60-340-GSK-N-1

- Black nitrile gasket
- Thickness: 1.5 mm




LMBWLC60RA

- Set of two right-angle brackets
- 300 series stainless steel
- Includes M6 button head screws for mounting to light
- Clearance for M6 or 1/4-20 mounting hardware




LMBWLC60RAS

- Pair of two swivel mount, right-angle brackets
- 300 series stainless steel
- Includes hardware for mounting to light

**ACC-WLC60-340-GSK-FDA-1**

- Blue FDA-approved silicone gasket
- Thickness: 1.6 mm



Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp. Any misuse, abuse, or improper application or installation of this product or use of the product for personal protection applications when the product is identified as not intended for such purposes will void the product warranty. Any modifications to this product without prior express approval by Banner Engineering Corp will void the product warranties. All specifications published in this document are subject to change; Banner reserves the right to modify product specifications or update documentation at any time. Specifications and product information in English supersede that which is provided in any other language. For the most recent version of any documentation, refer to: www.bannerengineering.com.

For patent information, see www.bannerengineering.com/patents.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Banner](#) manufacturer:

Other Similar products are found below :

[2LM3](#) [2PBA](#) [ACC-WL50F-MAG](#) [ACC-WLB72-CSR-5](#) [AT-FM-10K](#) [B25-K6LP-Q5](#) [BA23S](#) [BAM.752S](#) [BATR-753S](#) [BCD-M12DM-M12DM-5M](#) [BC-M12F12-24-5](#) [BC-M12F12-M12M12-24-10](#) [BC-M12F12-M12M12-24-2](#) [BC-M12F12-M12M12-24-5](#) [BC-M12F4-22-1](#) [BC-M12F4-22-10](#) [BC-M12F4-22-10-SF](#) [BC-M12F4-22-15](#) [BC-M12F4-22-2](#) [BC-M12F4-22-2-SF](#) [BC-M12F4-22-5](#) [BC-M12F4-22-5-SF](#) [BC-M12F4-22-8](#) [BC-M12F4A-22-1](#) [BC-M12F4A-22-10](#) [BC-M12F4A-22-2](#) [BC-M12F4A-22-2-SF](#) [BC-M12F4A-22-5](#) [BC-M12F4-M12M4-22-0.5](#) [BC-M12F4-M12M4-22-1](#) [BC-M12F4-M12M4-22-10](#) [BC-M12F4-M12M4-22-15](#) [BC-M12F4-M12M4-22-2](#) [BC-M12F4-M12M4-22-5](#) [BC-M12F4-M12M4-22-6](#) [BC-M12F4-M12M4A-22-10](#) [BC-M12F4-M12M4A-22-5](#) [BC-M12F5-22-1](#) [BC-M12F5-22-10](#) [BC-M12F5-22-10-SF](#) [BC-M12F5-22-2](#) [BC-M12F5-22-2-SF](#) [BC-M12F5-22-5](#) [BC-M12F5-22-5-SF](#) [BC-M12F5A-22-10](#) [BC-M12F5A-22-10-SF](#) [BC-M12F5A-22-2](#) [BC-M12F5A-22-2-SF](#) [BC-M12F5A-22-5](#) [BC-M12F5A-22-5-SF](#)