


Features



- Conjoin multiple devices together into one connector
- Rugged design; easy installation with no assembly or individual wiring required
- 5-pin M12 male home-run quick-disconnect connector
- 5-pin M12 female quick-disconnect connectors
- Rugged overmolded design meets IP65, IP67, and IP68


Models

Model	Ports	Homerun Connector	Wiring
R50-4M125-M125Q-P	(4) Integral 5-pin M12 female quick-disconnect connectors	(1) Integral 5-pin M12 male quick-disconnect connector	Parallel
R95-8M125-M125Q-P	(8) Integral 5-pin M12 female quick-disconnect connectors		

Mechanical Installation

Install the Molded Junction Block to allow access for functional checks, maintenance, and service or replacement.

All mounting hardware is supplied by the user. Fasteners must be of sufficient strength to guard against breakage. Use of permanent fasteners or locking hardware is recommended to prevent the loosening or displacement of the device. The mounting hole (4.5 mm) in the Molded Junction Block accepts M4 (#8) hardware. See the figure below to help in determining the minimum screw length.

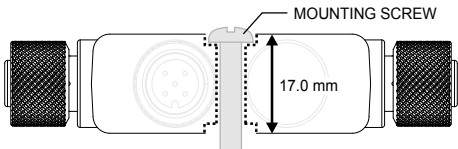


NOTE: The dotted line indicates the profile of the counterbore.



CAUTION: Do not overtighten the Molded Junction Block's mounting screw during installation. Overtightening can affect the performance of the Molded Junction Block.

Wiring

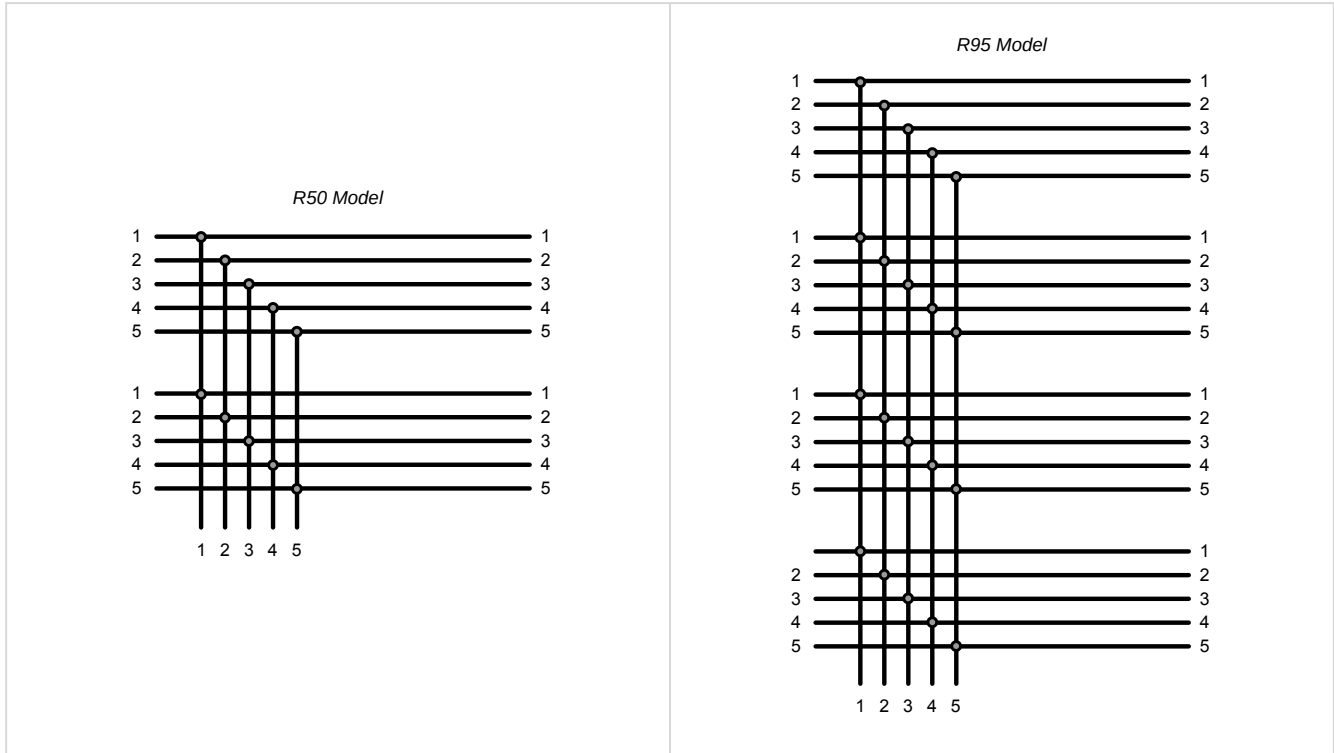

Specifications

Voltage Input Range

60 V DC

Maximum Current

4 A

Construction

Coupling Material: Nickel-plated brass

Housing Body: TPU black

Vibration and Mechanical Shock

Meets IEC 60068-2-6 requirements (Vibration: 10 Hz to 55 Hz, 0.5 mm amplitude, 5 minutes sweep, 30 minutes dwell)

Meets IEC 60068-2-27 requirements (Shock: 15G 11 ms duration, half sine wave)

Environmental Ratings

IP65, IP67, IP68

Operating Conditions

–40 °C to +70 °C (–40 °F to +158 °F)

90% at +70 °C maximum relative humidity (non-condensing)

Storage Temperature: –40 °C to +80 °C (–40 °F to +176 °F)

Certifications




Banner Engineering BV
Park Lane, Culliganlaan 2F bus 3
1831 Diegem, BELGIUM



Dimensions

All measurements are listed in millimeters [inches], unless noted otherwise. The measurements provided are subject to change.

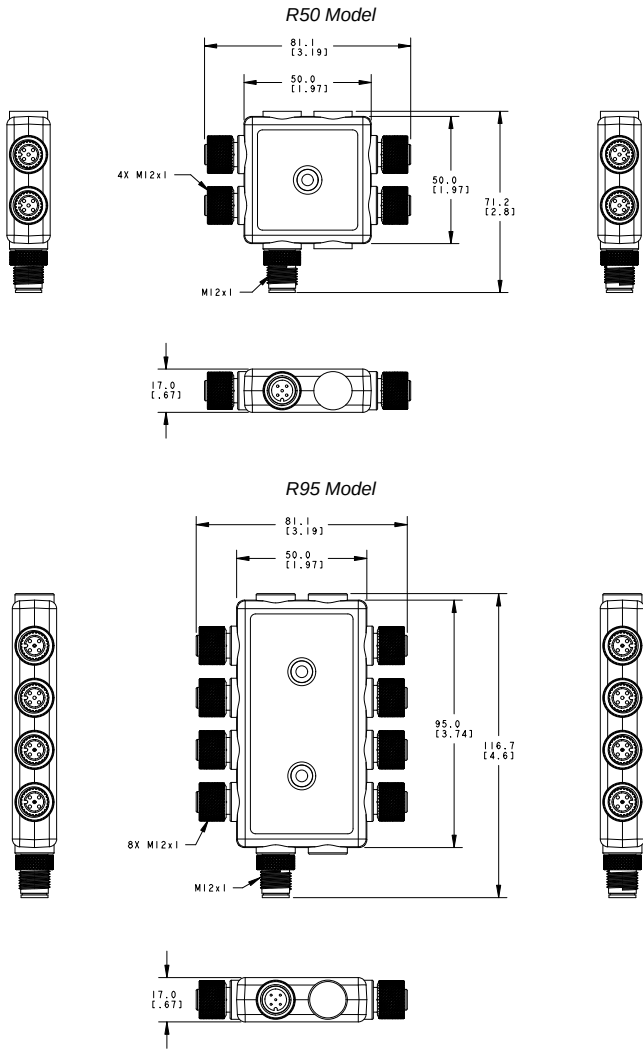

Accessories

Cordsets

5-pin Double-Ended M12 Female to M12 Male Cordsets				
Model	Length	Dimensions (mm)	Pinouts	
BC-M12F5-M12M5-22-1	1 m (3.28 ft)		Female Male	1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray
BC-M12F5-M12M5-22-2	2 m (6.56 ft)			
BC-M12F5-M12M5-22-5	5 m (16.4 ft)			
BC-M12F5-M12M5-22-8	8 m (26.25 ft)			
BC-M12F5-M12M5-22-10	10 m (30.81 ft)			
BC-M12F5-M12M5-22-15	15 m (49.2 ft)			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Junction Blocks](#) category:

Click to view products by [Banner](#) manufacturer:

Other Similar products are found below :

[120248-0520](#) [2701503](#) [1516836](#) [1452819](#) [905-5M NC032](#) [1516852](#) [1300370004](#) [918-5M NC032](#) [1516755](#) [919-5M NC032](#) [1516797](#) [802-5M NC032](#) [BOX1M1205MA05M805F](#) [1516894](#) [1503412](#) [1452929](#) [1453012](#) [1452741](#) [DB12-5A4M23-DPS7001](#) [902-10M-NC032](#) [908-10M-NC032](#) [909-10M-NC032](#) [911-10M-NC032](#) [913-10M-NC032](#) [914-10M-NC032](#) [917-10M-NC032](#) [DB12-5A4CAB-DPS7B01](#) [DB12-5A8CAB-DPS7B01](#) [DB12-5A8M23-DPS7001](#) [DB12-5A8CAB-DPS7B10](#) [DB8-3A4CAB-SPS7B10](#) [DB8-3A8CAB-SPS7B05](#) [DB8-3A8CAB-SPS7B01](#) [DB8-3A6CAB-SPS7B10](#) [DB8-3A4CAB-SPS7B05](#) [DB8-3A6CAB-SPS7B03](#) [DB8-3A8CAB-SPS7B03](#) [DB8-3A6CAB-SPS7B05](#) [DB8-3A4CAB-SPS7B03](#) [DB8-3A6M16-SPS7001](#) [DB8-3A4M12-SPS7001](#) [JB-4M12-M23-24](#) [JB-4M12-M23-N24](#) [JB-4M12-M23-P24](#) [JB-4M8-M12-4](#) [JB-4M8-M12-N4](#) [JB-4M8-M12-P4](#) [JB-8M12-M23-24](#) [JB-8M12-M23-N24](#) [JB-8M12-M23-P24](#)