
MODEL NO.	PACKAGING		
148-0901-721	ONE PCS PER BAG		

	REV	ECO	DATE
ı	001	ECO-17-0033	12/18/2017
I			
ı			

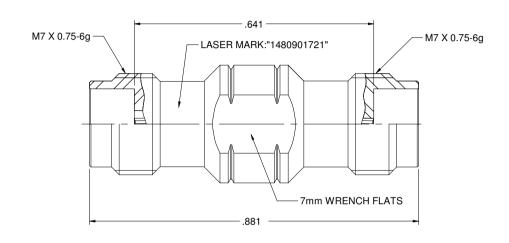

## NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL & FINISH:
- 1.1 BODY: PASSIVATED STAINLESS STEEL 1.2 CONTACT PIN: GOLD PLATED BERYLLIUM COPPER
- 1.3 INSULATOR: ULTEM 1000 AMBER
- 2. ELECTRICAL:
- 2.1 IMPEDANCE: 50 OHMS
- 2.2 FREQUENCY RANGE: 0-67 GHZ
- 2.3 VOLTAGE STANDING WAVE RATIO: 1.2 MAX
- 2.4 INSERTION LOSS: 0.05 X/F (GHZ)DB MAX
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN 2.6 CONTACT RESISTANCE: CENTER CONTACT: 4 MILLIOHMS MAX OUTER CONTACT: 2.5 MILLIOHMS MAX
- 2.7 INSULATION RESISTANCE: 5000 MOHM MIN
- 3. MECHANICAL:
- 3.1 ENGAGEMENT/ DISENGAGEMENT FORCE: 0.23 NM MAX
- 3.2 CONTACT RETENTION: 20 N MIN
- 3.3 DURABILITY: 500 CYCLES MIN
- 4. ENVIRONMENT:
- 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B. 4.2 OPERATING TEMPERATURE: -55 TO 125 ℃
- 4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
- 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
- 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
- 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

a cinch	Model No. 148-0901-721/730		Johnson				
THE REAL PROPERTY.	RoHS2	Cage Code	Title:	ADAPTER A	SSEMBLY, JA	ACK TO	
This PROPRETARY Discurrent	2011/65/EU	3RD ANGLE PROJECTION	JACK,1.85mm				
Soutons, It is confidential to	UNLESS OF ERWISE SPECIFED UNITS, NO	· · · · · · · · · · · · · · · · · · ·	Drawi	ng No.			Rev.
rational with the stead understanding that it is not traced or copied without permission and it returnable upon demand.	.XXX ±.02	Drawn by: Betty.Yu	148-0901-721/730			001	
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14 5-2008.	.XXXX ±.01 ANGLES ±5*	12/12/2017	C	DO NOT SCALE DRAWING	NONE NONE	Sheet	1 of 1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Adapters - In Series category:

Click to view products by Bel Fuse manufacturer:

Other Similar products are found below:

5916-1103-603 5919-1503-000 651A505 82-5552 9030-9523-502 PN2C A0407000 R114703000W R125771001 R127871001

R141710000W R141723161 R141730000 R143730700 R143770000 R161703000W R161753000W R161791530W R201705000

R222705200 R222M40010W R223703180 R316754000 R405006000 R443162000 AD78TL HRM-513S 1996352-2 2157155-1 252169-75

AD158 2101130-1 252186 R114704000W R114720000W R125705001 R125705701 R125771000 R125771001W R127704001

R127.870.001 R127872001 R141717000 R142710000 R142723000 R143703000 R143704000 R143705700 R161771000W R176754000