

Connectivity and Structured Cabling

Product Catalog



Table of Contents

Table of Contents

RF Connectors & Adapters	
75 Ohm BNC Connectors	5
Crimp-On 75 Ohm 3-Piece BNC Connectors.....	5
Crimp-On 75 Ohm 2-Piece BNC Connectors.....	6
Twist-On 75 Ohm BNC Connectors	6
75 Ohm BNC Adapters.....	6
True 75 Ohm 3-Piece Crimp-On Coinnectors.....	7
Twist-On 50 Ohm BNC Connectors	8
Chassis Mount 50 Ohm BNC Connectors	8
BNC Terminators & Attenuator Pads.....	8
2-Piece Crimp-On 50 Ohm BNC Connectors.....	9
3-Piece Crimp-On 50 Ohm BNC Connectors.....	9
6-Piece Screw-On 50 Ohm BNC Connectors.....	9
50 Ohm BNC Adapters	10
50 Ohm 'N' Connectors, Adapters & Terminators.....	11
Mini-UHF Connectors & Adapters.....	12
UHF Connectors & Adapters	13
Crimp-On 2 & 3 Piece TNC Connectors	14
Twist-On TNC Connectors	14
TNC Terminators & Adapters	14
SMA Connectors & Adapters.....	15
Strain Relief Boots & Hoods for Coaxial Connectors	15
Stainless Steel Wallplates	15
'F' Connectors & Adapters	
Weatherproof 'F' Connectors	16
'F' 56 Series Connectors for RG-6	16
'F' 59 Series Connectors for RG-59	17
'F' Connectors for RG-11	17
'F' Series Splice Adapters.....	18
'F' Connector - Chassis & PCB Mount	18
'F' Series Adapters	19
'F' Voltage Blocks & Attenuator Pads	19
Quick Selector-Connector to EMERSON Tool Guide.....	20, 21
Audio/Video Connectors & Adapters	
RCA Connectors.....	22
RCA Gold Series Adapters.....	22
Weatherproof 'F' Compression Connectors.....	16, 23
RCA Standard Series Adapters	24
3.5 mm Connectors	24
Microphone Connectors	24
Audio Adapters	24
1/4" Mono & Stereo Connectors	25
Banana Plugs & Jacks	25
D-Subminiature Connectors & Modular Adapters	
D-Sub Crimp Kits.....	26
D-Sub Hoods with Grommets	26
98 & 99 Series Crimp Style D-Sub Connectors	26
94 Series Crimp Style High Density D-Sub Connectors.....	26
D-Sub Pins & Sockets.....	27
D-Sub Termination Tools	27
D-Sub Hardware	27
D-Sub Stainless Steel Wallplates	27
97 & 95 Series Solder Style D-Sub Connectors.....	28
95 Series Solder Style High Density D-Sub Connectors	28
IDC Headers & D-Sub Connectors.....	28
D-Sub Hoods	29
D-Sub Modular Adapter Kits (1- & 2-Piece Hood)	29
Centronics Connectors.....	29
Computer & LAN Cables	
Premium Multi-Coax Monitor Cables	30
VGA/SVGA Monitor Cables.....	30
Universal Series Bus Cables (USB Ver. 2.0).....	30
IEEE 1284 Parallel Printer Cables	31
Bi-Directional Parallel Printer Cables	31
Serial DB9 Extension Cables.....	31
D-Sub Switch Boxes & Cables	31
Serial Modem Cables.....	32
AC Power Cables.....	32
D-Sub Gender Changers & Adapters.....	32
Coaxial Cables	
Deluxe RCA Audio Cables with Gold Connectors.....	33
RCA Audio/Video/Speaker Cables	33
Wallplate with Gold RCA Jacks.....	33
Audio Cables & Adapters.....	34
Super VHS Video Cables.....	34
HDMI & DVI Cables	34
75 Ohm 'F' to 'F' Hook-Up Cables	35
Silver Satin Flat Cables	35
Coaxial LAN & Video Cables.....	35
Custom Made Coaxial Cables	36, 37
Fiber Optic Cables	
Single & Multi-Mode Fiber Optic Patch Cables.....	38
Network Cable Assemblies	
Category 5E & 6 Patch Cables.....	39
Bulk Cable	
Silver Satin Cable.....	40
Cat5E & Cat6 Stranded Patch Cable Wire	40

Table of Contents

Modular Plugs & Adapters	
Modular Plugs.....	40
RJ45 Snagless Boots.....	40
Telephone Butt Splices.....	41
Modular Couplers & Adapters.....	41
Modular Termination Tools	41
Voice & Data Structured Cabling	
Category 5E & 3 Keystone Jacks.....	42
Keystone Inserts.....	42
Keystone Wallplates.....	42
Category 5E Patch Panels.....	43
110 Blocks & Connectors.....	43
66 Block & Bracket	43
Wire Management Systems.....	43
Hinged Patch Panel Brackets.....	43
Modular Surface Mount Boxes.....	44
Modular Telephone Wallplates.....	44
TV/CATV Devices	
CATV Splitters - 5 MHz to 900 MHz	45
CATV Power Passing Splitters - 5 MHz to 900Mhz	45
CATV Drop Taps - 5 MHz to 1000 MHz.....	45
Power Passing Drop Taps - 5 MHz to 900 MHz	46
Blocking Coupler.....	46
Digital Couplers/Drop Taps by Viewsonics®	46
CATV 12 & 16-Way Splitters - 5 MHz to 1 GHz by Viewsonics®	47
CATV Digital Splitters - 5 MHz to 1 GHz by Viewsonics®	47
CATV Digital Amplifiers - 54 MHz to 1 GHz by Viewsonics®	47
CATV Coaxial Amplifiers - 54 MHz to 900 MHz, 5 MHz to 500 MHz.....	48
'F' Attenuator Pads.....	48
CATV Modulator & Combiner	48
TV/CATV/Satellite - F-81 Wallplates	49
TV/CATV/VCR - Matching Transformers.....	49
CATV/SATV Accessories.....	49
Tools & Test Equipment	
Network Installer Kit.....	50
Cable & Network Test Equipment.....	50
Cable Tester Kits.....	50
Pro-Series 110 & 66 Impact Punch Down Tools	51
Impact & Non-Impact Punch Down Tools	51
Modular Plug Crimping Tools	52
Wire Stripping Tools & Cutters	52
D-Sub Crimping & Termination Tools	53
D-Sub Insertion Tools	53
'F' Coaxial Crimping Tools	54
Economy 'F' Series Crimping Tools	54
Heavy Duty 'F' Hex Crimping Tools	54
Universal Coaxial Crimping Tools.....	54
Standard Series Ratchet Crimping Tools.....	55
Offset Ratchet Crimping Tools	55
Self-Adjusting Coax Strippers	56
3-Step & 2-Step Coax Strippers	56
Nylon Cable Ties	57
Tool & Work Bench Accessories.....	57
Power Supplies & Adapters	
AC Surge Protectors.....	58
AC/DC Power Supplies.....	58
AC Power Converters for Foreign Travel	58
AC/DC Power Adapters	58
Index	59-64
Aim & Cambridge Cross-Reference	64, 65
Coaxial Connector Termination Instructions.....	66



We have been offering a complete line of quality RF connectors for over 25 years. Available in 50 and 75 ohm versions, these connectors are designed to offer the highest quality data transmission for audio, video and data applications, and are available in BNC, 'N' UHF, Mini-UHF, TNC, SMA and 'F' versions. If you are looking for preassembled RF cables, our custom cable department offers the capability to build any assembled or molded cable to your custom length or configuration using any of these connectors and more.

75 Ohm BNC Connectors

Electrical Characteristics

Impedance	75 Ohm
Working voltage	500 volts, RMS at sea level
Frequency range	0-2 GHz with low reflection
Contact resistance	Outer-0.2 milliohms Center-2.1 milliohms (.000050 gold)
Insulation resistance	5,000 megohms minimum
Dielectric withstanding voltage	1,500 volts, RMS at sea level
Corona Level	375 volts minimum at 70,000 ft.

Environmental Characteristics

Recommended temperature range	-55 C to +85 C
Vibration	MIL-Std. 202
Shock	MIL-Std. 202, 100Gs
Moisture resistance	MIL-Std. 202

Mechanical Characteristics

Durability	500 Cycles (.000050 gold)
Force to engage/disengage	3 lbs. maximum
Coupling nut retention	60 lbs. maximum
Cable retention	60 lbs. with 95% braid coverage - RG58c/u cable

Materials

Body	Zinc
Contact	Brass
Spring washer	Berilium copper
Insulator	Teflon
Plating	Body - Nickel Contact - Gold

Crimp-On 75 Ohm 3-Piece BNC Connectors



Crimp BNC (M)
3 Piece

Part No.	Compatible Cable	Crimper	Stripper
28-91007 (CPMC782)	Belden 1505A, RG-59, RG-62	24-9959P	24-7732P
28-91027 (CPMC785)	Belden RG-6	24-8856P	24-7733P
28-91037 (CPMC7810)	Belden 1506A, RG-59TFE & RG-62TFE	24-9958P	24-7733P
28-91047 (CPMC783)	Belden 8281, 9141, 9231	24-8859P	24-7733P
28-91057 (CPMC7818)	Belden 8218, 1855A, 735A	24-9912P	24-7734P
28-91457	Belden 9248, 1694A	24-8856P	
24-7733P			
28-91477	Belden 8221, 8241, 8263, 8279, 9244	24-8789P	24-7736P
28-91507	Belden 82259, 89259	24-8789P	24-7736P
CPMC7820	RG-179, RG-187	24-9912P	24-7733P



Solder or Crimp BNC (M)
3 Piece

Part No.	Cable Type	Tool No.
28-90237	RG-59 & 62	24-8789P
28-90257	RG-59 & 62TFE	24-9958P

(M) = Male Plug (F) = Female Socket

RF Connectors & Adapters

Crimp-On 75 Ohm 2-Piece BNC



Crimp BNC (M)
2 Piece, Solderless



Crimp BNC (F)
2 Piece, Solderless



Right Angle, Crimp BNC (M)
2 Piece, Solderless

Part No.	Cable Type	Tool No.
28-90007 (CP782)	RG-59 & 62	24-9859P
28-90027 (CP785)	RG-6	24-321P
28-90097 (CP7810)	RG-59 & 62TFE	24-9858P

Part No.	Cable Type	Tool No.
28-90137	RG-59 & 62	24-9859P
28-90157	RG-59 & 62TFE	24-9858P

Part No.	Cable Type
28-90047	RG-59 & 62

Twist-On 75 Ohm BNC Connectors



Twist-On BNC (M)
1 Piece



Twist-On BNC Jack (F)
1 Piece, Field Installable



Right Angle, Twist-On BNC (M)
1 Piece, Solderless

Part No.	Cable Type
28-90507 (CPFIUG782)	RG-59 & 62
28-90527 (CPFIUG785)	RG-6
28-90547	RG-59 & 62TFE

Part No.	Cable Type
28-90537 (CPFIUG792)	RG-59 & 62
28-90337	RG-59 & 62TFE

Part No.	Cable Type
28-90567	RG-59 & 62
28-90577	RG-59 & 62TFE

75 Ohm BNC Adapters



In-Line Splice
BNC (F) to BNC (F)

Part No. 28-74307



Right Angle
BNC (M) to BNC (F)

Part No. 28-81507



1/2" Chassis Mount
BNC (F) to BNC (F)

Part No. 28-84707
(CPAD557)



'T' Adapter
3 Female (F-F-F)

Part No. 28-81417



BNC (M) to 'F' (F)


Part No. 28-75007



BNC (F) to 'F' (M)

Part No. 28-81007

True 75 Ohm BNC Connectors

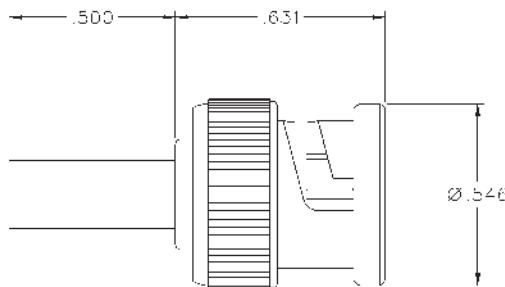

Crimp BNC (M)
3 Piece, solder or crimp
captivated contact

Electrical Characteristics

Impedance	75 Ohm	Part No.	Cable Type	Contact I.D.	Body I.D.	Sleeve I.D.
Frequency range	0-3 GHz	CPMC682	RG-59, 140, 302, Belden 9209A, 8279, 8241, 8263, Commscope 5563, Gepco VJ59U	.028 (0.71)	.152 (3.86)	.252 (6.40)
VSWR:	1.10 + .03 F (F in GHz) BNC Cabled	CPMC683	Belden 8281, 9231, 9141, 728A, Commscope 7501, VP618VC	.036 (0.91)	.203 (5.16)	.330 (8.38)
Plugs	1.03 + .02 F (F in GHz) BNC Adapters	CPMC685	RG-6,	.033 (0.84)	.191 (4.85)	.355 (9.01)
Working voltage	500 VRMS at sea level	CPMC6810	Belden 8215	.036 (0.91)	.149 (3.78)	.234 (5.94)
Dielectric withstanding voltage:	1500 VRMS at sea level	CPMC6818	Belden 82108, 89108, Coleman 99969	.021 (0.53)	.105 (3.81)	.180 (4.57)
Insulation resistance	5000 megohms minimum	CPMC6820	Belden 8218	.016 (0.53)	.067 (1.70)	.128 (3.25)
Contact resistance: max (nickel mental 3.5 miliohm	Outer - Initial 2.5 miliohm max (nickel mental not plated), after environmental max	CPMC6833	RG-179, 187, Belden 1520A	.028 (0.71)	.105 (3.81)	.180 (4.57)
Center - Initial 3 miliohm max, after environmental 4 miliohm max	Center - Initial 3 miliohm max, after environmental 4 miliohm max		Belden 735A, Commscope 735, Helex/Hitemp 735, BT3002, TZC75024	.021 (0.53)	.082 (2.08)	.160 (4.06)
Braid to Body - 2.5 miliohm max plated), after environmental max	Braid to Body - 2.5 miliohm max plated), after environmental max		Belden 1855A, 720A, Commscope 7538, Gepco VDM 230, VDM 250, Mini-75	.044 (1.12)	.176 (4.47)	.265 (6.73)
(nickel mental not applicable	applicable	CPMC6835	Belden 1505A, 734A, Commscope 5565, Gepco VPM2000	.036 (0.91)	.152 (3.86)	.252 (6.40)
Corona level	75 volts minimum at 70,000 feet	CPMC6836	Belden 1695A, 633938, Gepco VSD 2001TS, Commscope 2277V	.044 (1.12)	.187 (4.75)	.290 (7.37)
RF High Potential		CPMC6845	Belden 1694A, 9248, 1152, Commscope 5765, 2227K, Gepco VSD 2001, RG-6 Quad .275 (6.98) Max O.D.	.036 (0.91)	.138 (3.51)	.234
Withstanding Voltage	700 VRMS at 4 and 7 MHz	CPMC6850	Gepco VPM2000TK, VPM2000TS	.044 (1.12)	.196 ± .005	.330 ± .003

Environmental Characteristics

(Meets or exceeds the appl able paragraph of MIL-C-39012)						
Thermal shock:	MIL-STD-202, Method 107	CPMC6835	Belden 1505A, 734A, Commscope 5565, Gepco VPM2000	.036 (0.91)	.152 (3.86)	.252 (6.40)
Operating temperature	-650 C to +1650 C	CPMC6836	Belden 1695A, 633938, Gepco VSD 2001TS, Commscope 2277V	.044 (1.12)	.196 ± .005	.330 ± .003
Corrosion	MIL-STD-202, Method 101, Condition B	CPMC6845	Belden 1694A, 9248, 1152, Commscope 5765, 2227K, Gepco VSD 2001, RG-6 Quad .275 (6.98) Max O.D.	.036 (0.91)	.152 (3.86)	.252 (6.40)
Shock	MIL-STD-202, Method 213, Condition	CPMC6850	Gepco VPM2000TK, VPM2000TS	.044 (1.12)	.176 (4.47)	.265 (6.73)


Mechanical Characteristics

Durability	500 cycles min	CPMC6845	Belden 1694A, 9248, 1152, Commscope 5765, 2227K, Gepco VSD 2001, RG-6 Quad .275 (6.98) Max O.D.	.044 (1.12)	.196 ± .005	.330 ± .003
Force to engage/disengage	5 lbs. max, after durability 5 lbs max; 1 lb. min.	CPMC6850	Belden 1506A, 82259, 89259, Gepco VPM2000TK, VPM2000TS	.044 (1.12)	.176 (4.47)	.265 (6.73)
Coupling nut retention	100 lbs. min			.036 (0.91)	.187 (4.75)	.290 (7.37)
Contact retention	6 lbs. min axial force	(5.94)		.036 (0.91)	.138 (3.51)	.234

Material Specifications

Body	Brass, nickel plated .0001 min over copper plated .00005 min	CPMC6845	Belden 1694A, 9248, 1152, Commscope 5765, 2227K, Gepco VSD 2001, RG-6 Quad .275 (6.98) Max O.D.	.044 (1.12)	.196 ± .005	.330 ± .003
Contact	Brass, gold plated .00005 min over nickel plated .00005 min over copper plated .00005 min	CPMC6850	Belden 1506A, 82259, 89259, Gepco VPM2000TK, VPM2000TS	.044 (1.12)	.176 (4.47)	.265 (6.73)
Crimp Sleeve	Copper, nickel plate .0001 min over copper plated .00005 min			.036 (0.91)	.138 (3.51)	.234
Nut	Zinc, nickel plated over copper plated					
Insulator	Teflon					
Spring Washer	Beryllium Copper (unplated)					
Flat Washer	Steel, nickel plated					
Gasket:	Silicone rubber					

(M) = Male Plug (F) = Female Socket

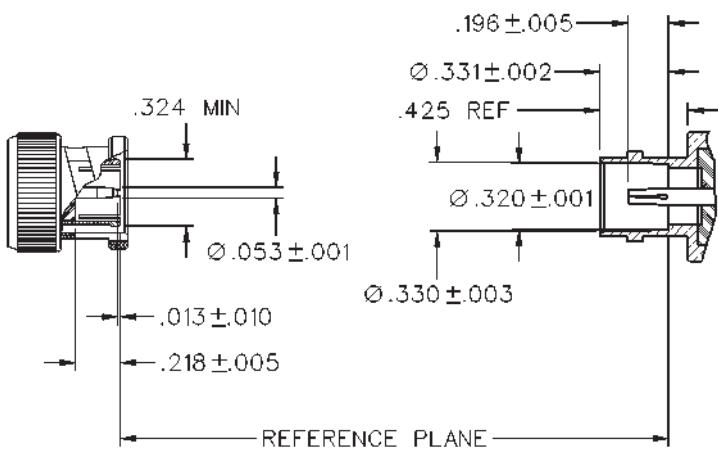

RF Connectors & Adapters

Twist-On 50 Ohm BNC Connectors



Twist-On BNC (M)
Piece, Crimpless & Solderless



Right Angle, Twist-On BNC (M)
1 Piece, Crimpless & Solderless



Twist-On BNC (F)
1 Piece, UG-89

Part No.	Cable Type
27-9050 (CPFIUG882)	RG-59 & 62
27-9051 (CPFIUG881)	RG-58
27-9052 (CPFIUG885)	RG-6
27-9054 (CPFIUG8810)	RG-59 & 62TFE
27-9058	Belden 8281
27-9059	RG-58TFE
CPFIUG884	RG-MATV-59

Part No.	Cable Type
27-9036	RG-58
27-9038	RG-6
27-9056	RG-59 & 62
27-9057	RG-59 & 62TFE

Part No.	Cable Type
27-9032	RG-6
27-9033	RG-59 & 62TFE
27-9053 (CPFIUG892)	RG-58, 59 & 62


Chassis Mount 50 Ohm BNC



Solder to BNC (F)
3/8" Mounting Hole,
UG-1094U



Dual BNC (F)
1/2" Chassis Mount
Hole, UG-492



Isolated Dual BNC (F)
1/2" & 5/8" Chassis
Mount Hole



Isolated BNC
(F) 3/8" Chassis
Mount Hole

Part No.	27-8460 (CPI094U)
Part No.	27-8470

Part No.	27-8471 (CPAD521)
Part No.	27-8461 (CPAD520)

BNC Terminators & Attenuator Pads



BNC Terminators
1/2 W @ 1%, with and without Grounding Strap



BNC (M) to BNC (F) Attenuator Pads
1/2 W @ 5%, 50 Ohms

Ohms	Color	w/Strap	w/o Strap
50 Ohms	Green	27-9245	27-9008
75 Ohms	Purple	27-9246	27-9007 (CP88T75)

Part No.	Rating
27-9300-3	3db
27-9300-6	6db
27-9300-10	10db
27-9300-20	20db

(M) = Male Plug (F) = Female Socket

2-Piece Crimp-On 50 Ohm BNC Connectors



Crimp BNC (M)
2 Piece, Solderless



Crimp BNC (F)
2 Piece, UG-89



Crimp BNC (M) with (2) Ferrules,
2 Piece. One Connector Two Ferrules to fit
Multiple Size Cables.

Part No.	Cable Type	Tool No.
27-9000 (CP882)	RG-59, 62	24-9859P
27-9001 (CP881)	RG-58	24-9858P
27-9002 (CP885)	RG-6	24-321P
27-9006	Belden 8281	24-8866P
27-9009 (CP8810)	RG-59, 62TFE	24-9858P
27-9200	RG-58AU	24-9858P
27-9204	RG-58TFE	24-9858P
27-9207	RG-58 Thin Net	24-9858P
27-9209	RG-6TFE	24-9858P
27-9210 (CP884)	RG-59, 62 MATV (20-24 AWG)	24-9859P

Part No.	Cable Type	Tool No.
27-9003 (CP892)	RG-59 & 62	24-9859P
27-9013	RG-6	24-9859P
27-9014 (CP891)	RG-58	24-9858P
27-9015	RG-59 & 62TFE	24-9858P



Right Angle, Crimp BNC (M)
2 Piece, Solderless

Part No.	Cable Type	Tool No.
27-9004	RG-59 & 62	24-9859P

3-Piece Crimp-On 50 Ohm BNC Connectors



Solder or Crimp BNC (M)
3 Piece



Crimp BNC (M) with (2) Ferrules
3 Piece. One Connector Two Ferrules to fit Multiple Size Cables.



Crimp BNC (M)
3 Piece, Commercial-Mil

Part No.	Cable Type	Tool No.
27-9022	RG-58	24-9858P
27-9023	RG-59 & 62	
24-8789P		

Part No.	Cable Type	Tool No.
27-9189 (CPMC8821)	RG-59 & 59TFE	24-8860P
27-9190 (CPMC8822)	RG-58 & 59	24-8860P
27-9191 (CPMC8823)	RG-58 & 58TFE	24-8860P

Part No.	Cable Type	Tool No.
27-9100 (CPMC882)	RG-59 & 62, 140, 210	24-9959P
27-9101 (CPMC881)	RG-58, 141	24-9958P
27-9102 (CPMC885)	RG-6	24-8856P
27-9103 (CPMC8810)	RG-59 & 62 Teflon	24-9958P
27-9104 (CPMC883)	Belden 8281	24-8861P
27-9105 (CPMC8819)	RG-174, 187, 188 & 316	24-9912P
27-9108 (CPMC8817)	RG-8x Mini 8	24-9912P
27-9119	Belden 89907	24-9959P
27-9201	RG-58 AU	24-9958P
27-9205 (CPMC8811)	RG-58 Teflon	24-9958P
27-9208	RG-58 Thin Net, Belden 9907	
24-9958P		
27-9235	RG-122	24-9912P
27-9236 (CPMC813)	RG-142, 400, 223	24-9958P
27-9241	RG-179	24-9912P
27-9254 (CPMC8818)	Belden 8218	24-9912P
27-9293 (CPMC8826)	RG-11	24-7712P

6-Piece Screw-On 50 Ohm BNC Connectors



Screw-On BNC (M)
Solder, 6 Piece

Part No.	Cable Type
27-9020	RG-59, 62 (UG-260U)
27-9021	RG-58 (UG-88U)

(M) = Male Plug (F) = Female Socket

RF Connectors & Adapters

50 Ohm BNC Adapters



In-Line Splice
BNC (F) to BNC (F),
UG-914/U



BNC (M) to BNC (M)



BNC 'T' Adapter
3 Female (F-F-F)



BNC 'T' Adapter
1 Male - 2 Female
(F-M-F), UG-274/U



BNC Goalpost 'T' Adapter
1 Male - 2 Female
(F-M-F)

Part No.
25-7430 (CPAD555)

Part No.
27-8130 (CPAD511)

Part No.
27-8141 (CPAD506)

Part No.
27-8140 (CPAD505)

Part No.
27-9294



BNC 'T' Adapter
3 Male (M-M-M)



BNC (F) to RCA (M)



BNC (M) to RCA (F)



BNC (F) to TNC (M)



BNC (F) to 'F' (M)

Part No.
27-8142 (CPAD510)

Part No.
27-8110 (CPAD501)

Part No.
25-7510 (CPAD515)

Part No.
27-8250 (CPAD300)

Part No.
27-8100 (CPAD502)



BNC (M) to 'F' (F)



Right Angle
BNC (F) to BNC (M)



BNC (M) to UHF (F)



BNC (F) to UHF (F)



BNC (F) to UHF (M)

Part No.
25-7500 (CPAD506)

Part No.
27-8150 (CPAD503)

Part No.
25-7420 (CPAD512)

Part No.
25-7365

Part No.
27-8120 (CPAD500)



BNC (F) to Mini-UHF (M)



BNC (F) to 'N' (F)
UG-606/U



BNC (M) to 'N' (F)
UG-349/U



BNC (F) to SMA (F)



BNC (F) to SMA (M)

Part No.
29-4150 (CPAD509)

Part No.
26-8018 (CPAD806)

Part No.
26-8017 (CPAD807)

Part No.
29-3835 (CPAD507)

Part No.
29-3855 (CPAD508)

50 Ohm 'N' Connectors



Crimp 'N' (M)
3 Piece, Crimp Center Pin



'N' (M)
Solder Center Pin, UG-21B/U

Part No.	Cable Type
26-8000 214	RG-8, 11, 213, RG-58

Part No.	Cable Type	Tool No.
CPN8/110	RG-8 w/110 Center Cond.	24-7712P
CPN8	RG-8, 11, 213	24-7712P
CPN1	RG-58	24-9960P
CPN2	RG-59 & 62	24-9960P
CPN17	RG-8x	24-9960P

50 Ohm 'N' Adapters



Inline Splice
'N' (M) to 'N' (M),
UG-57B/U



Inline Splice
'N' (F) to 'N' (F),
UG-29B/U



Chassis Mount
'N' (F) to Solder Lug
UG-58B/U



Right Angle
'N' (M) to 'N' (F),
UG-27/U



'N' (F) to BNC (M)
UG-349/U



Chassis Mount 'N' (F)



'N' (M) to BNC (F)
UG-201U



'N' (M) to UHF (F)
UG-146/U



'N' (F) to BNC (F)
UG-606/U



'N' (F) to UHF (M)
UG-83/U



'N' (M) to 'F' (F)



'N' (M) to SMA (F)

50 Ohm 'N' Terminators



'N' Terminator (M)
1W @ 2%

Part No.	Ohms
26-8023	50 Ohms

(M) = Male Plug (F) = Female Socket

RF Connectors & Adapters

Mini-UHF Connectors

	Mini-Crimp, 3 Piece	UHF (M)		Push-On Mini-UHF (M) Crimp, 3 Piece
	Part No. No. 29-4021	Cable Type Tool RG-58	Part No. No. 29-4031 (MiniUHF2) 24-9959P	Cable Type RG-58 RG-59 & 62
Mini-UHF (M) Crimp, 3 Piece, Black	Part No. No. 29-4035	Cable Type RG-8X RG-174, RG-188	Part No. No. 29-4034	Tool 24-9958P
Part No. No. 29-4021	Part No. No. 29-4035	Tool 24-9958P	Part No. No. 29-4030	Tool No. 24-9958P

Mini-UHF Adapters

	Mini-UHF (F) to Mini-UHF (F)		Mini-UHF (M) to Mini-UHF (F)		Right Angle Adapter Mini-UHF (M) to Mini-UHF (F)
Part No. 29-4110 (CPAD240)	Part No. 29-4140 (CPAD214)	Part No. 29-4130 (CPAD243)			
	Mini-UHF (M) to TNC (F)		Mini-UHF (F) to TNC (M)		Mini-UHF (F) to UHF (M)
Part No. 29-4100 (CPAD305)	Part No. 29-4105 (CPAD302)	Part No. 29-4145 (CPAD219)	Part No. 29-4150 (CPAD509)	Part No. 29-4150 (CPAD509)	Mini-UHF (M) to BNC (F)

(M) = Male Plug (F) = Female Socket

UHF Connectors



UHF (M)
Solder, 2 Piece, PL-259

Part No. 25-7300 (CPAD250) Cable Type RG-8, 11, 213, 214

UHF (M) with Hi-Temp Insulation
Solder, 2 Piece, PL-259

Part No. 25-7305 Cable Type RG-8, 11, 213, 214



Crimp UHF (M)
3 Piece

Part No. CPL2598	Cable Type RG-8	Tool No. 24-7712P
CPL2591	RG-58	24-9958P
CPL2592	RG-59	24-9959P



UG-175 Reducer
Used with a PL-259

Part No. 25-7310	Cable Type RG-58
25-7320	RG-59

UHF Adapters



In-Line Splice
PL-258, UHF (F) to UHF (F)

Part No.
25-7330 (CPAD204)



Right Angle Adapter
UHF (M) to UHF (F)

Part No.
25-7340



UHF 'T' Adapter
3 Female (F-F-F)

Part No.
CPAD210



UG-146/U Adapter
UHF (F) to 'N' (M)

Part No.
26-8015 (CPAD808)



UG-83/U Adapter
UHF (M) to 'N' (F)

Part No.
26-8014



Chassis Mount
UHF (F) to UHF (F)
UG-363/U

Part No.
CPAD207



UHF (F) to BNC (F)

Part No.
25-7365



UG-255 Adapter
UHF (F) to BNC (M)

Part No.
25-7420



UG-273/U Adapter
UHF (M) to BNC (F)

Part No.
27-8120 (CPAD500)



UHF (M) to 'F' (F)

Part No.
25-7550 (CPAD218)



UHF (F) to 'F' (M)

Part No.
27-8200



Chassis Mount
UHF (F) to Solder
Lug, SO-239



UHF (F) to RCA (M)

Part No.
27-8210



UHF (M) to TNC (F)

Part No.
25-7362



UHF (F) to TNC (M)

Part No.
27-8260



UHF (F) to Mini-UHF (M)

Part No.
29-4140 (CPAD214)



UHF (M) to Mini-UHF (F)

Part No.
29-4145 (CPAD219)

(M) = Male Plug (F) = Female Socket

RF Connectors & Adapters

Crimp-On 2- & 3-Piece TNC Connectors



Crimp TNC (F)
2 Piece, Non-Solder Center Pin



Crimp TNC (M)
2 Piece, Non-Solder Center Pin

Part No. Cable Type Tool No.
27-9046 RG-58 24-9858P

Part No. Cable Type Tool No.
27-9078 RG-58 24-9858P
27-9079 RG-59 & 62TFE 24-9858P

TNC Terminators



TNC Terminator (M)
0.5W @ 2%

Part No. Ohms
27-9017 50 Ohms

TNC Adapters



Chassis Mount
TNC (F) to TNC (F),
1/2" Mounting Hole



Isolated Chassis Mount
TNC (F) to TNC (F), 1/2"
& 5/8" Mounting Hole



TNC Inline Splice
TNC (F) to TNC (F)



TNC (F) to Mini-UHF (M)



TNC (M) to Mini-UHF (F)



TNC Right Angle
TNC (M) to TNC (F)



TNC (M) to BNC (F)



TNC (M) to UHF (F)



TNC (F) to Push-On TNC
(M) 1 Piece

Part No.
27-9068 (CPAD306)

Part No.
27-8250 (CPAD300)

Part No.
27-8260

Part No.
27-9278

(M) = Male Plug (F) = Female Socket

SMA Connectors



SMA for Flexible Cable (M)
Crimp, 3 Piece, Solder or
Crimp Center Pin

Part No.	Cable Type	VSWR & Freq. Range	Tool No.
28-5020	RG-161/U, 174, 188, 316 .021 (GHz)	0-12.4 GHz	1.15 + 24-328P
28-5021	RG-58/U, 141, 303	0-12.4 GHz	1.15 + .011 (GHz) 24-328P
28-5022	RG-55/U, 142, 223, 400	1.15 + .011 (GHz)	0-12.4 GHz



SMA (M)
Crimp, 3 Piece, Solder or
Crimp Center Pin

SMA Adapters



SMA (M) to BNC (F)



SMA (F) to BNC (F)



SMA (F) to 'N' (M)

Part No.
29-3855 (CPAD508)

Part No.
29-3835 (CPAD507)

Part No.
29-3840 (CPAD810)

Strain Relief Boots & Hoods for Coaxial Connectors

Colored BNC Boots, 100 per bag



Part No.	Cable Type	Color
25-7958BK	RG-58, 141	Black
25-7958RE	RG-58, 141	Red
25-7958BU	RG-58, 141	Blue
25-7958YE	RG-58, 141	Yellow
25-7958GN	RG-58, 141	Green



Part No.	Cable Type	Color
25-7959BK	RG-59, 62	Black
25-7959RE	RG-59, 62	Red
25-7959BU	RG-59, 62	Blue
25-7959YE	RG-59, 62	Yellow
25-7959GN	RG-59, 62	Green



BNC Boots
Black Only, 100 per bag

Part No.	Cable Type	Color
25-B58	RG-58, 141	Black
25-B58TN	RG-58, ThinNet Black	

(M) = Male Plug (F) = Female Socket



RG-59 Weatherproof
Boot
Black Only, 100 per bag

Part No.
25-7270

Stainless Steel Wallplates



Single	Hole Size	Dual
27-8483	3/8" Hole	27-8484
27-8478	1/2" Hole	27-8479
27-8485	No Hole	-----



BNC Hood for 3-Piece Crimp Plug
Black Only, 100 per bag

Part No.
25-7960BK

'F' Connectors & Adapters



With one of the widest selections of 'F' connectors in the industry, we offer you a high-quality, cost-effective connectivity solution. All our 'F' connectors are designed to meet the high standards of the Satellite and Cable TV industries. Our 'F' type connectors are available for RG-59, RG-6 and RG-11 cable and are offered in twist-on, crimp, solder style, compression and weatherproof varieties.

Weatherproof 'F' Connectors



Gel Filled 'F' (M)
Crimp, 0.324 Diameter, with O-ring
for Weatherproof Application.



F-56ALM WP (M)
Crimp, 1 Piece, 0.324 Diameter, Chromate
Plated, with Interior Gasket.



'F' Compression (M)
Crimp, 1 Piece
for Weatherproof Applications (use crimp tool 24-77144P).

Part No. 25-7066 Cable Type RG-6 Tool No. 24-7710P

Part No. 25-7056 Cable Type (CPF56ALMWP) RG-6 Tool No. 24-8866P

Nickel (10pk) 25-2502-10PB Gold (10pk) 25-2502G-10PB Cable Type RG-59 Dual, Tri- & Quad Shield

'F' 56 Series Connectors for RG-6 (Use Crimp Tools 24-7710 or 24-8866P for connectors)



Crimp-On F-56 (M)
with Separate 1/4" Ring.



Crimp-On F-56ALX (M)
for RG-6 Tri-Shield
& Quad Plenum
Cable.



Crimp-On F-56ALX (M)
for RG-6 Quad-
Shield Cable.



Crimp-On F-56A (M)
with attached 1/4"
Rng.



'F' Ratchet Crimp Tool
for RG-59, RG-6 and
Quad Shield Cable.

Part No.
25-7150

Part No.
25-7033 (CPF56ALX)

Part No.
25-7160

Blister No.
24-8866P



Crimp-On F-56ALM (M)
for RG-6 Cable.



Crimp-On F-56 (M)
for Teflon/Plenum
RG-6 Cable.



Twist-On F-56 (M)
for standard RG-6 Cable.



Crimp-On F-56ALM (M)
for RG-6 Cable,
Zinc Plated.

Part No.
25-7032 (CPF56ALM)

Part No.
25-7047

Part No.
25-7180 (CPFI56)

Part No.
25-7036

(M) = Male Plug (F) = Female Socket

'F' 59 Series Connectors for RG-59

(Use 24-7710 or 24-8866P for the following connectors)

Crimp-On F-59 (M)
with Separate 1/8"
Ring.Crimp-On Gold Plated
F-59 (M)
with Separate 1/8"
Ring.Crimp-On F-59 (M)
with Separate 1/4"
Ring.Crimp-On F-59 (M)
with Separate 1/2"
Ring.Crimp-On F-59A (M)
with Attached 1/8"
Ring.'F' Deluxe Hex Crimp Tool
for RG-6 & 59.Part No.
25-7000Part No.
25-7000GPart No.
25-7010 (CPF591/4)Part No.
25-7020 (CPF591/2)

Part No.

Part No.
24-7710Crimp-On F-59ALM (M)
for Standard RG-59
Cable.Crimp-On F-59ALM (F)
for Standard RG-59
Cable.Crimp-On F-59ALX (M)
for Tri-Shield RG-59 &
Quad Plenum.Crimp-On F-59 (M)
for Teflon/Plenum
RG-59 Cable.Crimp-On F-59 (M)
for Thin Cable RG-59,
62 Teflon.Right Angle Crimp-On
F-59R (M)
for RG-59 Cable.Part No.
25-7030 (CP59ALM)Part No.
25-7081Part No.
25-7031
(CP59ALX)Part No.
25-7049Part No.
25-7035Part No.
25-7146Push-On F-59PG (M)
or RG-59 Cable with
Center Pin.Twist-On F-59TW (M)
for Standard RG-59
Cable.Twist-On F-59TW (M)
with 1/2" Grip for
Standard RG-59.Twist-On F-59TW (M)
for RG-59 with Male
Quick Disconnect.F-59T (M)
Terminator
1/2 Watt @ 5%Part No.
25-7080Part No.
25-7120Part No.
25-7121Part No.
25-7280Part No.
25-7100

'F' Connectors for RG-11

Crimp-On F-11 (M)
2 Piece, with Separate 1/5" Ring.Crimp-On F-11 (M)
1 Piece, for Standard RG-11 Cable.Crimp-On F-11 (M)
3 Piece, for Teflon/Plenum RG-11
Cable.Part No. Cable Type
25-7190 RG-11 (CPF111/5)Tool No.
24-7712PPart No. Cable Type Tool No.
25-7191 (CPF11ALM) RG-11 24-7711PPart No. Cable Type Tool No.
25-7192 RG-11 24-7712P

(M) = Male Plug (F) = Female Socket

'F' Connectors & Adapters

'F' Series Splice Adapters



F-81 Inline 3/4" Splice
(F) to (F)



F-81 Inline 1" Splice
(F) to (F)



F-81 2GHz 1" Splice for
CATV & Satellite
(F) to (F)

Part No.
25-7200 (CPF81)

Part No.
25-7200L
(CPF81L)

Part No.
70-2081



F-81 Inline 3/4" Splice
with Nut & Washer
(F) to (F)



7/16" Nut & Washer
for use with all AIM
'F' Mounts & Splices.



F-71 Inline Splice
(M) to (M)



F-81 2GHz 1" Splice with Nut &
Washer for CATV & Satellite
(F) to (F)

Part No.
25-7210 (CPF81NW)

Part No.
25-7680 (CPFNW)

Part No.
25-7640

Part No.
70-2081-NW

'F' Connector - Chassis & PCB Mount



'F' Side Edge
PCB Mount (F)



F-61PC Straight
PCB Mount (F)



'F' Right Angle
PCB Mount (F)



F-61HD Chassis Mount
(M)
with 2 flat Sides.

Part No.
25-7630 (CPF61SE)

Part No.
25-7650

Part No.
25-7651

Part No.
25-7670



F-61AD Chassis Mount (F)



'F' Vertical Mount PCB (M)



'F' Right Angle
PCB Mount, Short (F)

Part No.
25-7660

Part No.
25-7654

Part No.
25-7652 (CPF61SR)

Crimp O-rings for 'F' Connectors



Part No.	Cable Type	Ring
25-7110	RG-59	1/8"
25-7040	RG-59	1/4"
25-7090	RG-59	1/2"
25-7620	RG-11	1/5"

'F' Series Adapters



'F' (F) to Push-On 'F' (M)



'F' (F) Right Angle to Push-On 'F' (M)



'F' (F) to RCA (F)



'F' (F) to RCA (M)



'F' (M) to RCA (F)

Part No.
25-7140

Part No.
25-7141

Part No.
25-7570

Part No.
25-7530 (CPAD103)

Part No.
25-7580



'F' (F) to P3.5 mm (M)



'F' (F) Right Angle to 'F' (M)



'F' (F) to 'N' (M)



'F' (M) to BNC (F)



'F' (F) to BNC (M)

Part No.
25-7540

Part No.
25-7600

Part No.
26-8020 (CPAD811)

Part No.
27-8100

Part No.
25-7500



'F' (F) to UHF (M)



'F' (M) to UHF (F)



'F' (F) to European (M) Plug



'F' (M) to European (M) Jack



'F' (F) to European (F) Jack

Part No.
25-7550 (CPAD218)

Part No.
27-8200

Part No.
25-2200

Part No.
25-2202

Part No.
25-2203

'F' Voltage Blocks & Attenuator Pads



'F' Voltage Blocking Coupler
Blocks DC and Low Frequency
AC Power-Bandwidth: DC to 1
GHz, Return Loss 25db, (M) to (F)

Part No.
25-7901



'F' Mini-Attenuator Pads
Nickel Plated,
Accuracy within 5%,
Return Loss 20db, 22
AWG Center Pin, DC to
1 GHz Bandwidth,
(M) to (F)

Part No.	Attenuation
FLN1G	1db
FLN2G	2db
FLN3G	3db
FLN6G	6db
FLN8G	8db
FLN10G	10db
FLN12G	12db
FLN16G	16db
FLN20G	20db

(M) = Male Plug (F) = Female Socket

Tool Quick Selector

Quick Selector—Connector to **EMERSON** Tool

(Select AIM Connector Row Reference to Vertical Tool Column)

Connectors	Non-Ratchet 'F' Crimp Tools 24-7700P 24-7710P 24-7711P 24-7712P 24-7713P	Ratchet Coaxial Crimp Tools 24-321P 24-8860P 24-8861P 24-8865F 24-8866F 24-9960P	Standard Series Ratchet Coaxial Crimp Tools with Interchangeable Dies 24-328P 24-8789P 24-8856P 24-8857P 24-8858P 24-8859P 24-9858P 24-9859P 24-9912P 24-9958P 24-9959P	Coaxial Cable Stripping Tools 24-7731P 24-7732P 24-7733P 24-7734P 24-7735P 24-7736P 24-7737P 24-7738P 24-7739P VSCT-1	CAMBRIDGE™ PRODUCTS Connectors
25-7000	•				CPF591/8
25-7010	•				CPF591/4
25-7020	•				CPF591/2
25-7030	•	•	•		CPF59ALM
25-7031	•				
25-7032	•	•	•		CPF59ALX
25-7033	•				CPF56ALM
25-7034		•			
25-7035	•		•		CPF56ALX
25-7036	•		•		CPF56ALS
25-7037			•		CPF59TE
25-7038			•		CPF56ALMZ
25-7047	•	•	•		CPF59CP
25-7049			•		CPF56CP
25-7050	•		•		CPF56P
25-7056	•		•		CPF59D
25-7066	•		•		CPF59A
25-7070	•		•		CPF56ALMWP
25-7080	•		•		CPF56WPG
25-7081	•		•		CPF59G
25-7146	•		•		CPF59PG
25-7150	•		•		CPF59FLM
25-7160	•	•	•		CPF59RA
25-7190		•			CPF561/4
25-7191	•	•			CPF56A
25-7192	•	•			CPF11/5
25-7290	•		•		CPF11ALM
25-7306		•			
25-7307					CPF11PLM
25-7308					CPF59RP
25-7690	•				CPL2598
26-8000					CPL2591
26-8002		•			CPL2592
26-8005		•			CPF59M
26-8019		•			CPAD802
26-8025		•			CPAD814
26-8028			•		CPN8
26-8029			•		CPFIN8
26-8031			•		CPNCL2
26-8033					CPN1
27-9000					CPN2
27-9001					CPN17
27-9002					CPN8/110
27-9003					CP882
27-9004					CP881
27-9006					CP885
27-9009					CP892
27-9010					-----
27-9012					CP883
27-9013					CP8810
27-9014					CPSW8821
27-9015					
27-9022					CPSW8823
27-9023					
27-9046					CP895
27-9060					CP891
					CP910
					CPCL881
					CPCL882
					CPTNC891
					CPMCTNC2

Quick Selector—Connector to EMERSON Tool continued
 (Select AIM Connector Row Reference to Vertical Tool Column)

Connectors	Non-Ratchet 'F' Crimp Tools	Ratchet Coaxial Crimp Tools	Standard Series Ratchet Coaxial Crimp Tools with Interchangeable Dies	Coaxial Cable Stripping Tools	Connectors
27-9061	24-7700P 24-7710P 24-7711P 24-7712P 24-7713P	24-321P 24-8850P 24-8861P 24-8865P 24-8866P 24-9960P	24-328P 24-8789P 24-8856P 24-8857P 24-8858P 24-8859P 24-9858P 24-9859P 24-9912P 24-9958P 24-9959P	24-731P 24-7732P 24-7733P 24-7734P 24-7735P 24-7736P 24-7737P 24-7738P 24-7739P VSCST-1	CPMCTNC1 CPMTNC19 CPTNC1 CPTNC10 CPMC882 CPMC881 CPMC885 CPMC8810 CPMC883 CPM8819 CPMC8817 CPMC8825 CPMC8821 CPMC8822 CPMC8823 CP8811 CPMC8811 CPMC881 CP884 CPAD309 CPMC8812 CPMC8813 CPM8820 CPAD570 CPMC8818 CPMCTNC17 CPMCTNC1B CPMC8826 142-0403-016 142-0407-016 142-0408-011 CP882 CP785 CP7810 CP792 CP7910 CPCS782 CPCS7810 CPMC782 CPMC785 CPMC7810 CPMC783 CPMC7818 CPMC7831
27-9065					
27-9078					
27-9079					
27-9100					
27-9101					
27-9102					
27-9103					
27-9104					
27-9105					
27-9108					
27-9119					
27-9189					
27-9190					
27-9191					
27-9200					
27-9201					
27-9203					
27-9204					
27-9205					
27-9207					
27-9208					
27-9209					
27-9210					
27-9215					
27-9235					
27-9236					
27-9241					
27-9248					
27-9254					
27-9266					
27-9282					
27-9293					
28-5020					
28-5021					
28-5022					
28-90007					
28-90027					
28-90097					
28-90137					
28-90157					
28-90237					
28-90257					
28-91007					
28-91027					
28-91037					
28-91047					
28-91057					
28-91317					
28-91457					
28-91477					
28-91507					
28-91557					
29-3100					
29-3103					
29-4010					
29-4021					
29-4030					
29-4031					
29-4033					
29-4035					

CAMBRIDGE[®] PRODUCTS

Audio/Video Connectors & Adapters



Look to us for a complete line of mono and stereo connectors and adapters, including RCA, 1/4", 3.5 mm, and microphone connectors and adapters. In addition, we offer a standard and gold-plated line of RCA connectors, adapters and wallplates for any home automation installation. If you are looking for A/V cables using these connectors,

RCA Connectors



RCA Jack (F)
Gold Plated

Part No. Color
19-1315 Red
19-1316 White



RCA Plug (M)
Gold Plated

Part No. Color
19-1303 Red
19-1304 White



RCA Plug (M)
Gold Plated

Part No. Color
19-1312 Red
19-1313 White



RCA Plug (M)
Metal

Part No. Color
19-1207 Red
19-1268 Black



RCA Jack (F)
Plastic

Part No. Color
19-1212 Red
19-1213 Black




RCA Plug (M)
Plastic

Part No. Color
19-1205 Red
19-1206 Black



Push-on 2-Piece Crimp RCA (M)
for RG-59 w/ 1/8" O-ring.



2-Piece Crimp Motorola (M)
for RG-59 w/ 1/8" O-ring.

Part No.
25-7290

Part No.
25-7690

RCA Gold Series Adapters



Inline Adapter
RCA (M) to RCA (M)
Gold Plated

Part No.
19-1318



Inline Adapter, Plastic
RCA (F) to RCA (F)
Gold Plated

Part No.
19-1319



Inline Adapter, Metal
RCA (F) to RCA (F)
Gold Plated

Part No.
19-1310


(M) = Male Plug (F) = Female Socket



In addition to our complete line of RF connectors, we offer a wide selection of products to meet the latest High-Definition TV, Cable TV, Satellite, DVD and Audio/Video standards, including the introduction of our new line of waterproof Compression Connectors. These connectors are designed to offer the highest quality data transmission for audio, video and data applications, and are available for RG-59 and RG-6 cable in BNC, 'F' and RCA versions.

Our BNC and RCA compression connectors are constructed of nickel plated, machined brass, with a gold plated center pin allowing the best conductivity while providing picture perfect video and superior sound quality. Our RCA connectors, with five colors to choose from, accommodate both Standard and High-Definition composite or component video connections, and our 'F' connectors consist of a smooth spin nut for easy finger tip installation. A GOLD Series of compression connectors

Compression

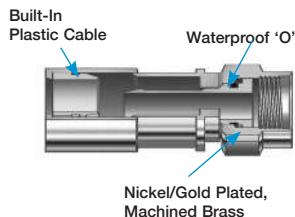

All three styles have an inner 'O' ring and a built-in plastic cable adapter which allows one connector to terminate regular, tri- and quad-shield cables and provides a water-tight double seal.



F



BNC



RCA

Part No.	Standard Compression Connectors (10 Pack)
25-2502-10PB	Compression F Connector, RG-59 Dual/Tri/Quad, Blue
25-2601-10PB	Compression F Connector, RG-6 Dual/Tri/Quad, Black
28-2502-10PB	Compression BNC 75 Ohm Connector, RG-59 Dual/Tri/Quad, Blue
28-2601-10PB	Compression BNC 75 Ohm Connector, RG-6 Dual/Tri/Quad, Black
19-2500-10PB	Compression RCA Connector, RG-59 Dual/Tri/Quad (2 per Color)
19-2502-10PB	Compression RCA Connector, RG-59 Dual/Tri/Quad, Blue
19-2503-10PB	Compression RCA Connector, RG-59 Dual/Tri/Quad, Green
19-2504-10PB	Compression RCA Connector, RG-59 Dual/Tri/Quad, Red
19-2505-10PB	Compression RCA Connector, RG-59 Dual/Tri/Quad, Yellow
19-2506-10PB	Compression RCA Connector, RG-59 Dual/Tri/Quad, White
19-2600-10PB	Compression RCA Connector, RG-6 Dual/Tri/Quad (2 per Color)
19-2602-10PB	Compression RCA Connector, RG-6 Dual/Tri/Quad, Blue
19-2603-10PB	Compression RCA Connector, RG-6 Dual/Tri/Quad, Green
19-2604-10PB	Compression RCA Connector, RG-6 Dual/Tri/Quad, Red
19-2605-10PB	Compression RCA Connector, RG-6 Dual/Tri/Quad, Yellow
19-2606-10PB	Compression RCA Connector, RG-6 Dual/Tri/Quad, White

Part No.	GOLD Series Compression Connectors (10 Pack)
25-2502G-10PB	GOLD Series Compression F Connector, RG-59 Dual/Tri/Quad, Blue
25-2601G-10PB	GOLD Series Compression F Connector, RG-6 Dual/Tri/Quad, Black
28-2502G-10PB	GOLD Series Compression BNC 75 Ohm Connector, RG-59 Dual/Tri/Quad, Blue
28-2601G-10PB	GOLD Series Compression BNC 75 Ohm Connector, RG-6 Dual/Tri/Quad, Black
19-2502G-10PB	GOLD Series Compression RCA Connector, RG-59 Dual/Tri/Quad, Blue
19-2601G-10PB	GOLD Series Compression RCA Connector, RG-6 Dual/Tri/Quad, Black

Part No.	Compression Termination Tools
24-7714P	Adjustable 3-Way Ratchet Crimp Tool for Compression RCA/BNC/F
24-7732P	2-Step Self-Adjusting Coax Stripper Tool

Technical Specifications

Connector Type	Cable Type	Max. Braid Coverage	Dielectric O.D. (Nom)	
			Inches	mm
F Connector with 7/16" Hex	RG-6 Dual	Up to 90% Coverage	.180	4.57
BNC Connector	RG-6 Tri-Shield	Up to 90% Coverage	.180	4.57
RCA Connector	RG-6 Quad-Shield	Up to 90% Coverage	.180	4.57
F Connector with 7/16" Hex	RG-59 Dual	Up to 90% Coverage	.144	3.27
BNC Connector	RG-59 Tri-Shield	Up to 90% Coverage	.144	3.27
RCA Connector	RG-59 Quad-Shield	Up to 90% Coverage	.144	3.27

*Patented

Audio/Video Connectors & Adapters

RCA Standard Series Adapters



RCA (F) to BNC (M)



RCA (M) to BNC (F)



RCA (F) to RCA (F)



RCA (F) to 'F' (F)

Part No.
25-7510

Part No.
27-8110

Part No.
19-1702

Part No.
25-7570



RCA (M) to 'F' (F)



RCA (F) to 'F' (M)



RCA (M) to UHF (F)



RCA (F) to 3.5 mm (M)

Part No.
25-7530 (CPAD103)

Part No.
25-7580

Part No.
27-8210

Part No.
25-7560

3.5 mm



3.5 mm Stereo Mini Plug
(M) Plastic



3.5 mm Mono Mini Plug
(M) Metal

Part No.
19-1202

Part No.
19-1201

**Call today for a list of our wide selection of
Audio, Video and Stereo cable assemblies.**

Microphone Connectors



3-Position Chassis
Mount Jack (F)



3-Position Chassis
Mount Plug (M)



XLR Microphone Jack (F)



XLR Microphone Plug (M)

Part No. Pins
44-D3F 3

Part No. Pins
44-D3M 3

Part No. Pins
44-A3F 3

Part No. Pins
44-A3M 3

(M) = Male Plug (F) = Female Socket

1/4" Mono



1/4" Mono Plug (M)
Plastic

Part No.
44-250



1/4" Mono Plug (M)
Metal

Part No.
44-280

1/4" Stereo Connectors



1/4" Stereo Plug (M)
Plastic

Part No.
19-1203



1/4" Stereo Plug (M)
Metal

Part No.
19-1204

Banana Plugs



Banana Plug (M)

Part No. Color
19-1237 Red
19-1238 Black

Audio Adapters



1/4" Stereo Plug
(M) to 3.5 mm Plug (F)



1/4" Stereo Jack
(F) to 3.5 mm Plug (M)



'F' (F) to P3.5 mm (M)

Part No.
19-1706

Part No.
19-1701

Part No.
25-7540



'Y' Adapter, Stereo
3.5 mm Mini-Plug (M)
to (2) RCA Plugs (M)



'Y' Adapter, Stereo
(1) RCA Plug (M)
to (2) RCA Jacks (F)



'Y' Adapter, Stereo
3.5 mm Mini-Plug (M)
to (2) RCA Jacks (F)



'Y' Adapter, Stereo
(2) RCA Plugs (M)
to (1) RCA Jack (F)

Part No.
19-1670P

Part No.
19-1671P

Part No.
19-1672P

Part No.
19-1673P

(M) = Male Plug (F) = Female Socket

D-Subminiature Connectors & Adapters



With one of the widest varieties of D-Subminiature connectors and modular adapters, we offer a complete D-Sub connectivity solution. Available in both gold-plated copper or tin alloy, crimp or solder styles, our offering provides the quality that you need at a reasonable cost. Our D-Sub hoods are available in plastic, as well as EMI/RFI protected metalized plastic and heavy duty metal. No D-Sub purchase is complete without reviewing our wide selection of **Emerson** D-Sub termination tools as seen

D-Sub Crimp Kits



D-Subminiature Standard Hood Kits include Plastic Hood with Hardware, Connector and Crimp Contacts.

Part No.	Pins	Gender
40-7009MK	9	M
40-7009SK	9	F
40-7015MK	15	M
40-7015SK	15	F
40-7025MK	25	M
40-7025SK	25	F

D-Sub Hoods with



Standard Plastic H Series Hoods with Rubber Grommets, includes Mounting Hardware.

Part No.	Pins	Hood
40-9709HG	9	Plastic
40-9715HG	15	Plastic
40-9725HG	25	Plastic



Heavy Duty Metal HM Series Hoods with Rubber Grommets, includes Mounting Hardware.

Part No.	Pins	Hood
40-9709HMG	9	Metal
40-9715HMG	15	Metal
40-9725HMG	25	Metal

98 Series Crimp Style Panel & Cable Mount D-Sub Connectors

Gold-Plated Contacts, Copper-Plated Alloy tabbed with Gold-Plated Housing on Nickel Thermoplastic Insulator



Part No.	Pins	Gender	Housing
40-9809M	9	M	Copper/Gold
40-9815M	15	M	Copper/Gold
40-9825M	25	M	Copper/Gold

99 Series Crimp Style Panel & Cable Mount D-Sub Connectors

Gold-Plated Contacts, Press Fitted Tin Alloy Housing on Nickel Thermoplastic Insulator



Part No.	Pins	Gender	Housing
40-9909M	9	M	Tin
40-9915M	15	M	Tin
40-9925M	25	M	Tin

94 Series Crimp Style Panel & Cable Mount High Density D-Sub Connectors

Gold-Plated Contacts, Press Fitted Tin Alloy Housing on Nickel Thermoplastic Insulator



Part No.	Pins	Gender	Housing
40-9415HDM	15	M	Tin



Part No.	Pins	Gender	Housing
40-9809S	9	F	Copper/Gold
40-9815S	15	F	Copper/Gold
40-9825S	25	F	Copper/Gold



Part No.	Pins	Gender	Housing
40-9909S	9	F	Tin
40-9915S	15	F	Tin
40-9925S	25	F	Tin



Part No.	Pins	Gender	Housing
40-9415HDS	15	F	Tin

(M) = Male Plug (F) = Female Socket

D-Sub Pins & Sockets



Standard D-Sub Pins for
98 & 99 Series (M)
Gold Plated



Standard D-Sub Pins for
98 & 99 Series (F)
Gold Plated



High Density D-Sub Pins for
98 & 99 Series (M)
Gold Plated



High Density D-Sub Pins for
98 & 99 Series (F)
Gold Plated

Part No.	Quantity
40-9854M	25 per bag
40-9856M	100 per bag

Part No.	Quantity
40-9864S	25 per bag
40-9866S	100 per bag

Part No.	Quantity
40-9428M	100 per bag

Part No.	Quantity
40-9428F	100 per bag

D-Sub Termination



D-Sub Insertion
& Extraction Tool



D-Sub Non-Ratchet
Crimp Tool
Crimps Non-
Insulated Open Barrel
Connectors & Contacts.



D-Sub Crimping Tool
for Precision Machined
Contacts, 4 Way Indent,
Crimps 20-26 AWG with
Built-in Contact Locator.



D-Sub Full Cycle Ratchet Crimping Tool
with Tension Adjustment Wheel,
Crimps 18-22 & 24-30 AWG,
Non-Insulated Open Barrel
Connectors, D-Sub Contacts.



D-Sub Full Cycle Ratchet Crimping Tool
Crimps 10-22 AWG Non-Insulated
Open Barrel Connectors, D-Sub &
V.35 Contacts.

Part No.	Type
40-9865	Standard
40-9427T	High-Density

Blister No.
24-73733P

Blister No.
24-8643P

Blister No.
24-8645P

Blister No.	Replacement Die
24-8644P	99-8644

D-Sub Hardware



Fig. A



Fig. B



Fig. C



Fig. D



Fig. E



Fig. F

D-Sub Stainless Steel Wallplates



D-Sub Wallplates
Stainless Steel, White

Pins	Single
9	40-9535
15	40-9533
25	40-9531

Description	Length	Figure	Gender	Part No. (1 Set)	Bulk (50 Sets)
Screw & Retainer	0.31"	A	M	40-98440M	40-98440M-C
Screw & Retainer	0.55"	B	M	40-98441M	40-98441M-C
Hex Female Screw Locks	0.30"	C	F	40-98440F	40-98440F-C
Hex Female Screw Locks	0.50"	D	F	40-98442F	
40-98442F-C					
Hex Standoff	0.24"	E	F	40-98443N	40-98443N-C
Thumbscrew Set	1.25"	F	M	40-9844T	40-9844T-C

(M) = Male Plug (F) = Female Socket

D-Subminiature Connectors & Adapters

97 Series Solder Style Panel & Cable Mount D-Sub Connectors

Gold-Plated Contacts, Copper Alloy/Gold-Plated Housing on Nickel Thermoplastic Insulator



Part No.	Pins	Gender	Housing
40-9709M	9	M	Copper/Gold
40-9715M	15	M	Copper/Gold
40-9725M	25	M	Copper/Gold
40-9737M	37	M	Copper/Gold
40-9750M	50	M	Copper/Gold



Part No.	Pins	Gender	Housing
40-9709S	9	F	Copper/Gold
40-9715S	15	F	Copper/Gold
40-9725S	25	F	Copper/Gold
40-9737S	37	F	Copper/Gold
40-9750S	50	F	Copper/Gold

95 Series Solder Style Panel & Cable Mount D-Sub Connectors

Gold-Plated Contacts, Tin Alloy Housing on Nickel Thermoplastic Insulator



Part No.	Pins	Gender	Housing
40-9509M	9	M	Tin
40-9515M	15	M	Tin
40-9525M	25	M	Tin



Part No.	Pins	Gender	Housing
40-9509S	9	F	Tin
40-9515S	15	F	Tin
40-9525S	25	F	Tin

95 Series Solder Style Panel & Cable Mount High Density D-Sub Connectors

Gold-Plated Contacts, Tin Alloy Housing on Nickel Thermoplastic Insulator



Part No.	Pins	Gender	Housing
40-9515HDM	15	M	Tin
40-9526HDM	26	M	Tin



Part No.	Pins	Gender	Housing
40-9515HDS	15	F	Tin
40-9526HDS	26	F	Tin

IDC Headers & D-Sub Connectors



Dual Row Socket Connectors
-Headers
(0.01" x 1" Spacing
w/Strain Relief)



D-Subminiature
Connectors
Plastic & Metal

These IDC connectors are constructed of phosphorus bronze contacts, flame retardant thermoplastic, and their insulation meets or exceeds UL-94 V-O.

These connectors are fully interchangeable with competitive Sockets and Headers, and are designed to work with 28 AWG Stranded or 30 AWG Solid Wire.

Part No.	Pins
40-8110	10
40-8114	14
40-8116	16
40-8120	20
40-8126	26
40-8134	34
40-8140	40
40-8150	50

Part No.	Pins	Gender	Housing
40-8309S	9	F	Plastic
40-8309M	9	M	Plastic
40-8315M	15	M	Plastic
40-8325S	25	F	Plastic
40-8325M	25	M	Plastic
40-8425M	25	M	Metal

(M) = Male Plug (F) = Female Socket

D-Sub Hoods



Standard Plastic 'H' Series
D-Sub Hoods
includes Mounting Hardware,
Gray.

Part No.	Pins
40-9709H	9
40-9715H	15
40-9725H	25
40-9737H	37
40-9750H	50




Deluxe Plastic 'HX' Series
D-Sub Hoods
includes Mounting Hardware &
Set Screw to Hold Cable, Gray.

Part No.	Pins
40-9709HX	9
40-9715HX	15
40-9725HX	25



Deluxe Metalized 'HS' Series
D-Sub Hoods
includes Mounting Hardware,
Shield Coating, Silver.


Part No.	Pins
40-9709HS	9
40-9715HS	15
40-9725HS	25

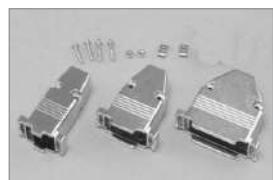

Shielded Metal 'HM' Series
D-Sub Hoods
includes Hardware, Silver.

Part No.	Pins
40-9709HM	9
40-9715HM	15
40-9725HM	25

D-Sub Modular Adapter Kits (1-Piece)

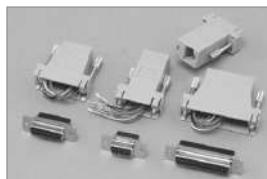

Color: Gray
Built to USOC Color

Part No.	Mod	D-Sub	Gender	Housing
40-9536M	RJ-12	9	M	1 Piece
40-9536F	RJ-12	9	F	1 Piece
40-9538M	RJ-45	9	M	1 Piece
40-9538F	RJ-45	9	F	1 Piece

Part No.	Mod	D-Sub	Gender	Housing
40-9558M	RJ-45	15	M	1 Piece
40-9558F	RJ-45	15	F	1 Piece

Part No.	Mod	D-Sub	Gender	Housing
40-9586M	RJ-12	25	M	1 Piece
40-9586F	RJ-12	25	F	1 Piece
40-9588M	RJ-45	25	M	1 Piece
40-9588F	RJ-45	25	F	1 Piece

D-Sub Modular Adapter Kits (2-Piece)



Color: Black
Built to Nevada Western Color Code

Part No.	Mod	D-Sub	Gender	Housing
40-9528M	RJ-45	9	M	1 Piece
40-9528F	RJ-45	9	F	1 Piece
40-9578M	RJ-45	25	M	1 Piece

Centronics Connectors



Centronics 50 Pin
Telco Cable Mount
Connector Kit (M)



Centronics 50 Pin
Telco Cable Mount
Connector Kit (F)

Part No.	Part No.
30-4809M	30-4809F

(M) = Male Plug (F) = Female Socket

Computer Cables & Adapters Cables



When computer connectivity is the project at hand, turn to Emerson Network Power Connectivity Solutions. Offering a complete line of computer cables, including USB, RS-232, and IEEE 1284 printer cables, we can get you connected. If it's a LAN that you are setting up, we offer both Category 5E and Category 6 patch cables in assembled and low-profile molded versions. We also offer a wide selection of single mode and multimode fiber jumpers to meet your project requirements. Most standard fiber jumpers are available to ship from stock the same day. Custom Cat5E, Cat6 and fiber LAN cables are always available; just send us your requirements.

Premium Multi-Coax Monitor



VGA/SVGA Multi-Coax 5 BNC Monitor Cable



VGA/SVGA Multi-Coax Monitor Cable

Part No.	Length	Conn. 1	Conn. 2
73-6360-6	6 feet	HD15 (M)	5BNC (M)
73-6360-10	10 feet	HD15 (M)	5BNC (M)

Part No.	Length	Conn. 1	Conn. 2
30-1511-6	6 feet	HD15 (M)	HD15 (M)
30-1511-10	10 feet	HD15 (M)	HD15 (M)

VGA/SVGA Monitor Cables



VGA/SVGA Multi-Conductor Video Cable



VGA/SVGA Multi-Conductor Extension Cable

Part No.	Length	Conn. 1	Conn. 2
30-1506MM	6 feet	HD15 (M)	HD15 (M)
30-1510MM	10 feet	HD15 (M)	HD15 (M)

Part No.	Length	Conn. 1	Conn. 2
30-1506MF	6 feet	HD15 (M)	HD15 (F)
30-1510MF	10 feet	HD15 (M)	HD15

Universal Serial Bus Cables (USB Ver. 2.0)

These USB cables consist of one pair of 20-28 AWG wire for power distribution (low or full speed) and one pair of 28 AWG wire twisted, with a shield and overall jacket (full speed) for signal distribution.



USB A-B Cable
Version 2.0



USB A-A Extension Cable
Version 2.0



USB A-A Cable
Version 2.0

Part No.	Length	Conn. 1	Conn. 2
30-3007-3	3 feet	USB A (M)	USB B (M)
30-3007-6	6 feet	USB A (M)	USB B (M)
30-3007-10	10 feet	USB A (M)	USB B (M)
30-3007-15	15 feet	USB A (M)	USB B (M)

Part No.	Length	Conn. 1	Conn. 2
30-3008-6	6 feet	USB A (M)	USB A (F)

Part No.	Length	Conn. 1	Conn. 2
30-3006-6	6 feet	USB A (M)	USB A (M)
30-3006-10	10 feet	USB A (M)	USB A (M)
30-3006-15	15 feet	USB A (M)	USB A (M)

(M) = Male Plug (F) = Female Socket

Bi-Directional Parallel Printer Cables



IEEE 1284 Centronics Printer Cable
18 Pair, 28AWG, Dual-Shielded

Part No.	Length	Conn. 1	Conn. 2
30-1284AB-3	3 feet	DB25 (M)	Cent36 (M)
30-1284AB-6	6 feet	DB25 (M)	Cent36 (M)
30-1284AB-1010	10 feet	DB25 (M)	Cent36 (M)



Centronics Printer Cable
36 Conductor, 28 AWG, Shielded

Part No.	Length	Conn. 1	Conn. 2
30-9506CC6	6 feet	Cent36 (M)	Cent36 (M)
30-9510CC10	10 feet	Cent36 (M)	Cent36 (M)



Centronics Printer Cable
25 Conductor, 28 AWG, Shielded

Part No.	Length	Conn. 1	Conn. 2
30-9506MC	6 feet	DB25 (M)	Cent36 (M)
30-9510MC	10 feet	DB25 (M)	Cent36 (M)

Serial & Parallel Extension Cables



Serial & Parallel Extension Cable
25 Conductor, 28 AWG, Shielded

Part No.	Length	Conn. 1	Conn. 2
30-9506MF	6 feet	DB25 (M)	DB25 (F)
30-9510MF	10 feet	DB25 (M)	DB25 (F)
30-9525MF	25 feet	DB25 (M)	DB25 (F)



DB9 Extension Cable (F)
Wired Pin to Pin

Part No.	Length	Conn. 1	Conn. 2
30-9506-77	6 feet	DB9 (F)	DB9 (F)
30-9510-77	10 feet	DB9 (F)	DB9 (F)



DB9 Data Extension Cable
Wired Pin to Pin

Part No.	Length	Conn. 1	Conn. 2
30-9506-99	6 feet	DB9 (M)	DB9 (F)
30-9510-99	10 feet	DB9 (M)	DB9 (F)

D-Sub Switch Boxes & Cables



DB9 Data Switch Cable
Wired Pin to Pin

Part No.	Length	Conn. 1	Conn. 2
30-9506-88	6 feet	DB9 (M)	DB9 (M)
30-9510-88	10 feet	DB9 (M)	DB9 (M)



D-Sub Manual Data Switches
Rotary Switch, 2-amp capacity,
No AC Required, Boxed, Metal

Part No.	Pins	Output
30-9575-2	9	2-Way
30-9585-2	25	2-Way
30-9585-4	25	4-Way



DB25 Data Switch Cable
25 Conductor, 28 AWG, Shielded

Part No.	Length	Conn. 1	Conn. 2
30-9506MM	6 feet	DB25 (M)	DB25 (M)
30-9510MM	10 feet	DB25 (M)	DB25 (M)
30-9525MM	25 feet	DB25 (M)	DB25 (M)

(M) = Male Plug (F) = Female Socket

Computer Cables & Adapters Cables

Serial Modem Cables



External Serial Modem Cable

Part No.	Length	Conn. 1	Conn. 2
30-9506-29	6 feet	DB25 (M)	DB9 (F)
30-9510-29	10 feet	DB25 (M)	DB9 (F)

D-Sub Gender Changers



Gender Adapter
DB9 (F) to DB25 (M)




Gender Adapter
DB9 (M) to DB25 (F)



Null Modem Adapter
DB25 (M) to DB25 (F)



High Density D-Sub (SVGA)
Mini Gender Changers & Port Saver



D-Sub Mini Gender Changers

Part No.
30-9516

Part No.
30-9520

Part No.
30-9521

Part No. Pins Gender
30-9537 15 F to F
30-9538 15 F to M

Part No. Pins Gender
30-9530 9 F to F
30-9531 9 M to M
30-9532 15 F to F
30-9533 15 M to M
30-9534 25 F to F
30-9535 25 M to M

AC Power Cables



Three Conductor Electrical Equipment
Cords
Use with Computer Monitors, Printers,
Peripheral Devices
& other Electronic Equipment,
7 Amp 125 V, 18 AWG.

Part No.
Length
65-3006
6 feet
65-3010



Panasonic Replacement AC Power Cords, 6 ft.

Part No. Style
65-403P Wide



With a comprehensive line of RF connectors, we can provide a complete connectivity solution. We stock 50 and 75 ohm cables for Audio, Video and Data requirements, including hook-up cables for satellite and CATV installations; RCA cables and adapter cables for TV, DVD and VHS hook-ups; as well as BNC cables for networking and video applications. If not in stock in our warehouse, our custom cable department offers the capability to build any assembled or molded cable to your custom length or configuration, including BNC, 'N' UHF, Mini-UHF, TNC,

Deluxe RCA Audio Cables with



Deluxe Dual RCA Hook-Up & Dubbing Cables with Gold Connectors, Molded Strain Relief, 75 Ohm, One Video - One Audio, Packaged for Retail Display.

Part No.	Length	Conn. 1	Conn. 2
603DUGP	3 feet	RCA (M)	RCA (M)
606DUGP	6 feet	RCA (M)	RCA (M)
612DUGP	12 feet	RCA (M)	RCA (M)



Deluxe RCA Hook-Up & Dubbing Cables with Gold Connectors, Molded Strain Relief, 75 Ohm, Packaged for Retail Display.

Part No.	Length	Conn. 1	Conn. 2
603RRGP	3 feet	RCA (M)	RCA (M)
606RRGP	6 feet	RCA (M)	RCA (M)



Deluxe Triple RCA Hook-Up & Dubbing Cables with Gold Connectors, Molded Strain Relief, 75 Ohm, One Video - Two Audio, Packaged for Retail Display.

Part No.	Length	Conn. 1	Conn. 2
603DMGP	3 feet	RCA (M)	RCA (M)
606DMGP	6 feet	RCA (M)	RCA (M)
612DMGP	12 feet	RCA (M)	RCA (M)

RCA Audio/Video/Speaker



RCA (STEREO) Hook-Up & Dubbing Cables Molded Strain Relief, Shielded 75 Ohm, Red & White Color Coded, Packaged for Retail Display.

Part No.	Length	Conn. 1	Conn.
2			
6803P	3 feet	RCA (M)	RCA (M)
6806P	6 feet	RCA (M)	RCA (M)
6812P	12 feet	RCA (M)	RCA (M)
6825P	25 feet	RCA (M)	RCA (M)



RCA (AUDIO) Hook-Up Cables Molded Strain Relief, Shielded 75 Ohm, Packaged for Retail Display, Black.

Part No.	Length	Conn. 1	Conn.
2			
6706P	6 feet	RCA (M)	RCA (M)
6712P	12 feet	RCA (M)	RCA (M)

(M) = Male Plug (F) = Female Socket

Audio/Video Cables & Adapters

Video Cables



HDMI to HDMI Cables

For standard and High-Definition (720 & 1080i) video formats providing up to 5Gbps of bandwidth



HDMI to DVI-D Single Link Cables

Designed for high-resolution video formats for connection of PC and Video components



SVHS Video Cables

Molded Strain Relief, 4-Pin Mini-Din, Black

Part No.	Length	Conn.1	Conn.2
30-1611-1	1 meter	HDMI (M)	HDMI (M)
30-1611-2	2 meter	HDMI (M)	HDMI (M)
30-1611-3	3 meter	HDMI (M)	HDMI (M)
30-1611-5	5 meter	HDMI (M)	HDMI (M)

Part No.	Length	Conn.1	Conn.2
30-1612-1	1 meter	HDMI (M)	DVI (M)
30-1612-2	2 meter	HDMI (M)	DVI (M)
30-1612-3	3 meter	HDMI (M)	DVI (M)
30-1612-5	5 meter	HDMI (M)	DVI (M)

Part No.	Length	Conn. 1	Conn. 2
6SVHS-6P	6 feet	MD4 (M)	MD4 (M)
6SVHS-10P	10 feet	MD4 (M)	MD4 (M)
6SVHS-15P	15 feet	MD4 (M)	MD4 (M)
6SVHS-25P	25 feet	MD4 (M)	MD4 (M)
6SVHS-50P	50 feet	MD4 (M)	MD4 (M)

Audio Cables & Adapters



'Y' Adapter
(1) RCA Plug (M) to
(2) RCA Jacks (F)



'Y' Adapter
(2) RCA Plugs (M) to
(1) RCA Jack (F)



'Y' Adapter
Stereo 3.5 mm Mini-Plug
(M) to (2) RCA Plugs (M)



'Y' Adapter
Stereo 3.5 mm Mini-
Plug (M) to (2) RCA
Jacks (F)

Part No.
19-1671P

Part No.
19-1673P

Part No.
19-1670P

Part No.
19-1672P



Stereo Adapter Cable
3.5 mm Plug (M) to
RCA Plug (M)



Stereo Adapter Cable
3.5 mm Plug (M) to
3.5 mm Plug (M)



'F'Jack (F) to
3.5 mm Plug (M)

Part No.
19-1640P

Part No.
19-1645P

Part No.
25-7540



3.5 mm (M)
to
RCA Jack (F)



1/4" Stereo Jack (F)
to 3.5 mm Plug (M)



1/4" Stereo Plug (M)
to 3.5 mm Jack (F)

Part No.
25-7560

Part No.
19-1701

Part No.
19-1706

(M) = Male Plug (F) = Female Socket

75 Ohm 'F' to 'F' Hook-Up Cables for MATV/CATV/SATV/VCR/



F-59 Hook-Up Cable with Gold Connectors
Molded Strain Relief, 75 Ohm, Packaged
for Retail Display.

Part No.	Length	Conn. 1	Conn. 2
612FFGP	12 feet	F (M)	F (M)
615FFGP	15 feet	F (M)	F (M)



F-59 Hook-Up Cable with
Molded Strain Relief
75 Ohm, Bulk Packaged.

Part No.	Length	Conn. 1	Conn. 2
603FFBBU	3 feet	F (M)	F (M)



RG-59 Hook-up Cables with Molded Strain Relief
75 Ohm, Packaged for Retail Display.

White	Length	Black	Conn. 1	Conn. 2
-----	6 inches	666FFPB	F (M)	F (M)
601FFP	1 foot	601FFPB	F (M)	F (M)
602FFP	2 feet	-----	F (M)	F (M)
603FFP	3 feet	603FFPB	F (M)	F (M)
606FFP	6 feet	606FFPB	F (M)	F (M)
612FFP	12 feet	612FFPB	F (M)	F (M)
-----	15 feet	615FFPB	F (M)	F (M)
625FFP	25 feet	625FFPB	F (M)	F (M)
650FFP	50 feet	650FFPB	F (M)	F (M)
675FFP	75 feet	675FFPB	F (M)	F (M)
6100FFP	100 feet	6100FFPB	F (M)	F (M)



F-59 Hook-Up Cable with Gold
'Quick Disconnect' Push-On Connectors
Molded Strain Relief, 75 Ohm,
Packaged for Retail Display.

Part No.	Length	Conn. 1	Conn. 2
603QQGP	3 feet	F (M)	F (M)
606QQGP	6 feet	F (M)	F (M)
612QQGP	12 feet	F (M)	F (M)



RG-6 Hook-up Cables with
Molded Strain Relief
75 Ohm, Packaged for Retail Display.

White	Length	Black	Conn. 1	Conn. 2
6-3FFP	3 feet	6-3FFPB	F (M)	F (M)
6-6FFP	6 feet	6-6FFPB	F (M)	F (M)
6-12FFP	12 feet	6-12FFPB	F (M)	F (M)
6-25FFP	25 feet	6-25FFPB	F (M)	F (M)

**Call today for pricing and
availability on any custom
length RG-59 or RG-6 'F'
cable assemblies.**

Silver Satin Flat Cables



Modular Data Extension Cords
(M) to (M) Plugs, Straight-Wired

Part No.	Length	Color	Conductors
30-4PP7	7 feet	Gray	6P4C (RJ-11)
30-4PP15	15 feet	Gray	6P4C (RJ-11)
30-4PP25	25 feet	Gray	6P4C (RJ-11)
30-6PP7	7 feet	Gray	6P4C (RJ-12)
30-6PP15	15 feet	Gray	6P6C (RJ-12)
30-6PP25	25 feet	Gray	6P6C (RJ-12)
30-8PP7	7 feet	Gray	8P8C (RJ-45)



Modular Telephone Extension Cord
(M) to (M) Plugs, Cross-Wired

Part No.	Length	Color	Conductors
32-1414	7 feet	Gray	6P4C (RJ-11)
32-1434	15 feet	Gray	6P4C (RJ-11)
32-1454	25 feet	Gray	6P4C (RJ-11)
32-6PP7	7 feet	Gray	6P6C (RJ-12)
32-6PP15	15 feet	Gray	6P6C (RJ-12)
32-6PP25	25 feet	Gray	6P6C (RJ-12)

Coaxial LAN & Video Cables



BNC Cable Assemblies
Shielded BNC (M) to BNC (M), Black

50 Ohm	Length	75 Ohm
RG-58	Length	RG-59
603BBP	3 feet	603BBP
606BBP	6 feet	606BBP
6012BBP	12 feet	612BBP
6025BBP	25 feet	625BBP
-----	50 feet	650BBP
-----	75 feet	675BBP

Custom Cables



Custom Made Coaxial Cables

As part of the Emerson Network Power Connectivity Solutions, we offer a wide selection of quality cables and jumpers in most connector styles and lengths. With production capabilities in USA, Mexico and Asia, we offer our customers the flexibility of quick turn assembled and molded cables in all styles and configurations, including Cat5E/6 jumpers, telco cables, Coaxial LAN, D-Sub, Audio/Video cables and many more.



RG-59 Audio & Video BNC to BNC Cables

Constructed of RG-59, 75 Ohm, 80% Braid, 22 AWG Stranded Cable, Matching Colored Boots & Cable.

Length	Black Part No.	Blue Part No.	Green Part No.	Red Part No.	Yellow Part No.
3 feet	73-6310-3	73-6311-3	73-6312-3	73-6313-3	73-6314-3
6 feet	73-6310-6	73-6311-6	73-6312-6	73-6313-6	73-6314-6
10 feet	73-6310-10	73-6311-10	73-6312-10	73-6313-10	73-6314-10
25 feet	73-6310-25	73-6311-25	73-6312-25	73-6313-25	73-6314-25



RG-59 Audio & Video RCA to RCA Cables

Constructed of RG-59, 75 Ohm, 80% Braid, 22 AWG Stranded Cable, Matching Colored Boots & Cable.

Length	Black Part No.	Blue Part No.	Green Part No.	Red Part No.	Yellow Part No.
3 feet	73-7410-3	73-7411-3	73-7412-3	73-7413-3	73-7414-3
6 feet	73-7410-6	73-7411-6	73-7412-6	73-7413-6	73-7414-6
10 feet	73-7410-10	73-7411-10	73-7412-10	73-7413-10	73-7414-10
25 feet	73-7410-25	73-7411-25	73-7412-25	73-7413-25	73-7414-25



RG-58 Thin Ethernet BNC to BNC Cables

Constructed of 50 Ohm, 95% Braid & 100% Foil Shield Cable, 20 AWG Stranded (Belden 9907 Equivalent), Black PVC Cable.

Length	Black Boots Part No.	Blue Boots Part No.	Green Boots Part No.	Red Boots Part No.	Yellow Boots Part No.
3 feet	73-6340-3	73-6361-3	73-6362-3	73-6363-3	73-6364-3
6 feet	73-6340-6	73-6361-6	73-6362-6	73-6363-6	73-6364-6
10 feet	73-6340-10	73-6361-10	73-6362-10	73-6363-10	73-6364-10
25 feet	73-6340-25	73-6361-25	73-6362-25	73-6363-25	73-6364-25


As with all of our custom built cables, additional sizes are always available!

RG-58AU & RG-58 Thin Ethernet BNC to BNC Cables

Constructed of RG-58AU, 50 Ohm, 95% Braid, 20 AWG Stranded Cable (Belden 8219 Equivalent), Black PVC Cable.

Length	Black Boots Part No.	Blue Boots Part No.	Green Boots Part No.	Red Boots Part No.	Yellow Boots Part No.
3 feet	73-6300-3	73-6351-3	73-6352-3	73-6353-3	73-6354-3
6 feet	73-6300-6	73-6351-6	73-6352-6	73-6353-6	73-6354-6
10 feet	73-6300-10	73-6351-10	73-6352-10	73-6353-10	73-6354-10
25 feet	73-6300-25	73-6351-25	73-6352-25	73-6353-25	73-6354-25

Other Custom Made Cables

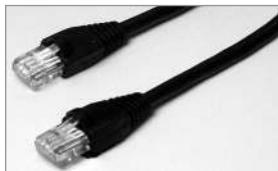

LAN Crossover Patch Cables
4 Pair UTP, 24 AWG Stranded, RJ-45 to RJ-45, EIA568B, with Matching Colored Boots & Cable (unless otherwise specified).

Length	Cat 5E-350 MHz	Cat 6-500 MHz
3 feet	74-778_X-3	74-888_X-3
7 feet	74-778_X-7	74-888_X-7
10 feet	74-778_X-10	74-888_X-10
14 feet	74-778_X-14	74-888_X-14
25 feet	74-778_X-25	74-888_X-25
50 feet	74-778_X-50	74-888_X-50

Colors: '_'= 0-Gray, 1-Black, 2-Blue,
3-Green,
4-Red, 5-Yellow, 6-White,



25 Pair TELCO Cable Assemblies
AMP 50 Pin Centronics Connector,
25 Pair, 24 AWG, USOC Wired

Length	(M) to (M)	(M) to (F)
6 feet	73-6930-6	73-6940-6
10 feet	73-6930-10	73-6940-10
25 feet	73-6930-25	73-6940-25
50 feet	73-6930-50	73-6340-
50		



V.35 Cable Assemblies
V.35 to V.35 using 18 1/2 Pair Low Capacitance Dual Shielded Cable

Length	(M) to (M)	(M) to (F)
6 feet	73-6500-6	73-6510-6
10 feet	73-6500-10	73-6510-10
25 feet	73-6500-25	73-6510-25
50 feet	73-6500-50	73-6510-
50		

**Call today for pricing and availability on
any custom cable assemblies.**

**Most name brand and equivalent connector
styles
are available to build to your configuration**



DB-9 to DB-9, D-Subminiature Cables
Fully loaded using 4 1/2 Pair, Dual Shield, Low Capacitance Cable.

Length	(M) to (M) Part No.	(M) to (F) Part No.	(F) to (F) Part No.
6 feet	73-6210MM-6	73-6210MF-6	73-6210FF-6
10 feet	73-6210MM-10	73-6210MF-10	73-6210FF-10
25 feet	73-6210MM-25	73-6210MF-25	73-6210FF-25
50 feet	73-6210MM-50	73-6210MF-50	73-6210FF-50



DB-15 to DB-15, D-Subminiature Cables
Fully loaded using 7 1/2 Pair, Dual Shield, Low Capacitance Cable.

Length	(M) to (M) Part No.	(M) to (F) Part No.	(F) to (F) Part No.
6 feet	73-6220MM-6	73-6220MF-6	73-6220FF-6
10 feet	73-6220MM-10	73-6220MF-10	73-6220FF-10
25 feet	73-6220MM-25	73-6220MF-25	73-6220FF-25
50 feet	73-6220MM-50	73-6220MF-50	73-6220FF-50



DB-25 to DB-25, D-Subminiature Cables
Fully loaded using 12 1/2 Pair, Dual Shield, Low Capacitance Cable.

Length	(M) to (M) Part No.	(M) to (F) Part No.	(F) to (F) Part No.
6 feet	73-6230MM-6	73-6230MF-6	73-6230 FF-6
10 feet	73-6230MM-10	73-6230MF-10	73-6230 FF-10
25 feet	73-6230MM-25	73-6230MF-25	73-6230 FF-25
50 feet	73-6230MM-50	73-6230MF-50	73-6230 FF-50

(M) = Male Plug (F) = Female Socket



Fiber Optic Patch Cables

We offer a wide selection of quality fiber jumpers in most connector styles and lengths through our Optical division. Warehoused in Maryland, most standard configurations can be shipped same day. Custom lengths and configurations can be manufactured and shipped with a slightly longer lead time.


Multimode Patch Cord Styles

Connector	Cable Type	Polish Type	Typical	Max
FCA SC	50/125 µm, 62.5/125 µm	PC	<=-0.2	<=-0.35
FCA ST	50/125 µm, 62.5/125 µm	PC	<=-0.2	<=-0.35
SC	50/125 µm, 62.5/125 µm	PC	n/a	<=-0.5
ST	50/125 µm, 62.5/125 µm	PC	n/a	<=-0.5
FC	50/125 µm, 62.5/125 µm	PC	n/a	<=-0.5
LC	50/125 µm, 62.5/125 µm	PC	n/a	<=-0.5
MU	50/125 µm, 62.5/125 µm	PC	n/a	<=-0.5
MT-RJ	50/125 µm, 62.5/125 µm	Flat	n/a	<=-0.5
MTP	62.5/125 µm	Flat	n/a	<=-0.5
FDDI	62.5/125 µm	PC	n/a	<=-0.5
Escon	62.5/125 µm	PC	n/a	<=-0.5
D4	62.5/125 µm	PC	n/a	<=-0.5
Optiplug	62.5/125 µm	PC	n/a	<=-0.5
Optjack	62.5/125 µm	PC	n/a	<=-0.5
Min BNC	62.5/125 µm	PC	n/a	<=-0.5
Biconic	62.5/125 µm	PC	n/a	<=-1.30
SMA 905	62.5/125 µm	PC	n/a	<=-1.30
SMA 906	62.5/125 µm	PC	n/a	<=-1.30

Call today for pricing and availability on our wide selection of standard length jumpers. Custom lengths and connector configurations are always available!



Standard Fiber Jumper	Single mode	Multimode	Multimode
Cable Specifications	8.3/125 µm	62.5/125 µm	50/125 µm
Buffer material	PVC	PVC	PVC
Buffer OD	900 µm	900 µm	900 µm
Jacket material	PVC	PVC	PVC
Jacket OD	3.0 mm	3.0 mm	3.0 mm
Jacket color	Yellow	Orange	Orange
Attenuation	1.0 db/km @1310 nm	3.75 db/km @850 nm	3.75 db/km @850 nm
Attenuation	75 db/km @1550 nm	1.5 db/km @1310 nm	1.5 db/km @1310 nm
Min. bandwidth	----	160 kHz/km @850 nm	160 kHz/km @850 nm
Min. bandwidth	----	500 kHz/km @1310 nm	500 kHz/km @1310 nm
Serial Gigabit Ethernet Distance (m)	----	----	850 nm/1300 nm 600/600
Serial 10 Gigabit Ethernet Distance (m)	----	----	850 nm/1300 nm 82/-
Maximum tensile load	100 N/cm	100 N/cm	Maximum tensil load 100 N/cm
cm			
Loaded min. bend radius	5 cm	5 cm	Loaded min. bend radius 5 cm
Unloaded min. bend radius	3 cm	3 cm	Unloaded min. bend radius 3 cm
cm			
Crush resistance	750 N/cm	750 N/cm	Crush resistance 750 N/cm
Impact resistance	1,000 cycles	1,000 cycles	Impact resistance 1,000 cycles
Flex resistance	5,000 cycles	5,000 cycles	Flex resistance 5,000 cycles

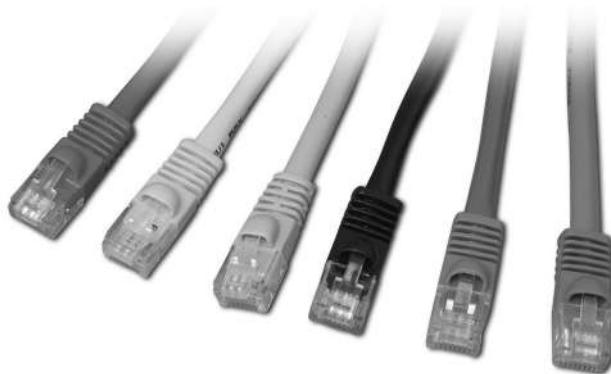

Our LAN patch cables are designed and tested to meet and exceed ANSI/TIA-568-B.2 Category 5E and ANSI/TIA-568-B.2-1 Category 6 industry standards. Available in assembled and molded low-profile boots, we offer a wide selection of 10 standard colors and 9 standard lengths. These cables are constructed of 24 AWG unshielded twisted pair 350 MHz and 500 MHz UL cable, and are stocked in our

centrally located warehouse in Waseca, Minnesota.

In addition, our custom cable department is ready and able to build any custom length or special configuration LAN cable in all 10 standard colors, including crossover and shielded twisted pair patch cables. Private labeling and packaging are always available,

Category 5E & 6 Patch Cables



Features:

- Cables are designed with 50u" Gold-Plated Modular Plugs
- Molded Cables have a Flexible Low-Profile Snagless Strain Relief
- Cat5E Cables are constructed of UL 350 MHz 24 AWG UTP Cable
- Cat6 Cables are constructed of UL 500 MHz 24 AWG UTP Cable
- All Cables are Retail Packaged with UPC-A Barcode
- ETL Tested & Verified to Category 5E and Category 6 Standards




Category 5E Assembled Patch Cables

These assembled type cables are constructed of Stranded 350 MHz UL Cable, Category 5E rated RJ-45 Plugs, and are built to the EIA568B standard configuration. (Example: Assembled, Green, 10 ft. = p/n 73-7773-10.)

	Cat5E Assembled	Cat5E Molded & Booted	Cat6 Molded & Booted
Length	Part No.	Part No.	Part No.
1 ft.	73-777x-1	73-779x-1	73-889x-1
3 ft.	73-777x-3	73-779x-3	73-889x-3
5 ft.	73-777x-5	73-779x-5	73-889x-5
7 ft.	73-777x-7	73-779x-7	73-889x-7
10 ft.	73-777x-10	73-779x-10	73-889x-10
14 ft.	73-777x-14	73-779x-14	73-889x-14
25 ft.	73-777x-25	73-779x-25	73-889x-25
50 ft.	73-777x-50	73-779x-50	73-889x-50
100 ft.	73-777x-100	73-779x-100	73-889x-100

X=Colors 0 (Gray), 1 (Black), 2 (Blue), 3 (Green), 4 (Red), 5 (Yellow), 6 (White), 7 (Orange),

Custom length assembled patch cables and crossover cables are also available with or without boots in all standard colors, as well as in pink, purple and orange, upon request.

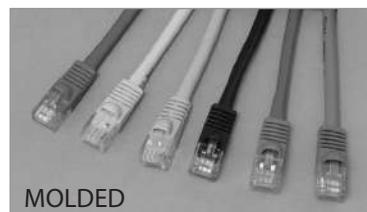


Category 6 Molded Patch Cables

Designed with a low profile molded boot, these cables are constructed of Stranded 500 MHz UL Cable, Category 6 rated RJ-45 Plugs, and are built to the EIA568B standard configuration. (Example: Molded, Black, 3 ft. = p/n 73-8891-3.)

Category 5E Molded Patch Cables

Designed with a low profile molded boot, these cables are constructed of Stranded 350 MHz UL Cable, Category 5E rated RJ-45 Plugs, and are built to the EIA568B standard configuration. (Example: Molded, Gray, 7 ft. = p/n 73-7790-7.)

Modular Plugs & Adapters

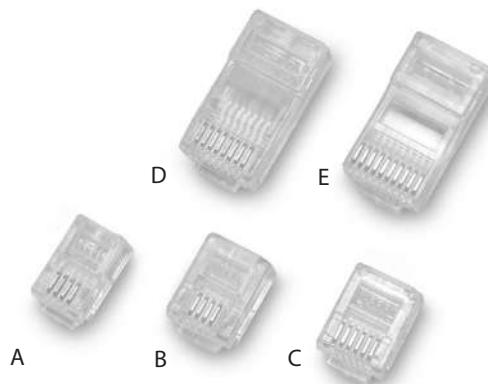

These premium quality UL listed modular plugs are manufactured in the USA to meet or exceed the high data transmission standards required by current voice and data communication standards. They are designed to work with most standard crimp tools, as well as the complete line of Emerson crimp tools as found on page 52. These connectors are available in 4, 6, 8 and 10 pin versions, and the gold contacts consist of 50 micro-inch gold plating, and are built to work with both solid and stranded

Modular Plugs

Features:

- 50 micro-inch Gold-Plated contacts
- Easy Installation with most Crimp Tools
- UL Listed & Certified
- Made in U.S.A.




Part No.	Figure	RJ-11 (6p4c)	RJ-12 (6p6c)	RJ-45 (8p8c)	CAT5	CAT5e	CAT6	Straight	Offset	Load Bar	Solid	Stranded	Flat	Round	Unshielded
32-5964UL	A	Handset Plug RJ-22 (4p4c)		✓				✓		✓	✓	✓	✓	✓	✓
32-5954UL	B	✓		✓				✓		✓	✓	✓	✓		✓
32-5994UL	B	✓		✓				✓		✓	✓	✓		✓	✓
32-5956UL	C		✓	✓				✓		✓	✓	✓	✓		✓
32-5996UL	C		✓	✓				✓		✓	✓	✓		✓	✓
32-2098UL	F			✓	✓			✓		✓	✓	✓		✓	✓
32-5958UL	D			✓	✓			✓		✓	✓	✓		✓	✓
32-5998UL	D			✓	✓			✓		✓	✓	✓		✓	✓
32-5998EUL	D			✓		✓			✓	✓	✓	✓		✓	✓
32-2198UL	D			✓		✓		✓	✓	✓	✓	✓		✓	✓
32-6198UL	D			✓			✓		✓	✓	✓	✓		✓	✓
(Works with Belden 1872A and Bonded Cat6 7881															
32-5910UL	E			U-45 (10p10p)	✓			✓			✓	✓		✓	✓



Cat5E & Cat6 Stranded Patch Cable
4 pair, 24 AWG Unshielded, EIA/
TIA 568, 1,000 ft. 'Reel in Box' with
cable length markings.



Flat Silver Satin Telephone and
Computer Equipment Wire
28 AWG, Stranded Wire , Spool, Gray

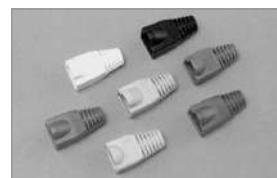

Colored Snagless Boots
for RJ-45 8 Conductor Shielded
and Unshielded Modular Plugs.

Part No.	Cond.	Length	Listing	Color	Round
65-TF254C	4	500 feet	non-UL	Gray	30-2900GY
65-TF224M	4	1,000 feet	non-UL	Black	30-2900BK
65-TF256C	6	500 feet	non-UL	Blue	30-2900BU
65-TF226M	6	1,000 feet	non-UL	Green	30-2900GN
65-TF258C	8	500 feet	non-UL	Red	30-2900RE
65-TF228M	8	1,000 feet	non-UL	Yellow	30-2900YE
65-TF264M	4	1,000 feet	UL Listed	White	30-2900WH
65-TF266M	6	1,000 feet	UL Listed		
65-TF268M	8	1,000 feet	UL Listed		

Telephone Butt

UR Connector
3 Ports for 2 or 3 Wire
Connections, for 19-26
AWG Wire.

Part No.
32-5001



UY Connector
Bundle Splice for
2 Wire Connections,
for 22-26 AWG Wire.

Part No.
32-5002



UB Connector
Space Saving Tap Connector
to tap into existing wire
without interruption, for
22-26 AWG Wire.

Part No.
32-5003



B-Wire Connector
Splices 17 AWG Bare and
22 AWG Insulated Wire.

Part No.	Quantity
32-6000M	1,000 per pack
32-6001C	100 per pack

Modular Couplers & Adapters

Shielded Cat5e RJ-45 Modular In-Line Coupler Straight Wired

Part No. Color
30-9242 Nickel Plated



Unshielded Modular Duplex Adapter
for splitting Voice, Modem, Fax
and Data Lines.

Part No.	Color	Pins
32-1014	Ivory	4
32-1014W	White	4
32-1016	Ivory	6
32-1016W	White	6
32-1018	Ivory	8
32-1018W	White	8



Unshielded Modular In-Line Coupler
Cross Wired for Voice Applications.

Part No.	Color	Pins
32-1004	Ivory	4
32-1004W	White	4
32-1006	Ivory	6



Unshielded Cat5e Panel Mount RJ-45 Modular In-Line Coupler
Wired Straight for Data Applications.

Part No.	Color	Pins
30-9344G	Gray	8
30-9344B	Black	8
30-9344W	White	8
30-9344 I	Ivory	8




RJ-11 Three-Way Modular Adapter

Part No.	Color	Pins
32-1044	Ivory	4



Unshielded Modular In-Line Coupler
Wired Straight for Data Applications.

UL Part No.	Color	Pins
30-1004UL	Ivory	4
30-1006UL	Ivory	6
30-1008KUL	Ivory	8

Modular Tools

4" UTP Stripping Tool
Strips 2, 4, 6 & 8 cond. Flat
or Round Cable Solid and
Stranded from 3.5 mm-9
mm.

Part No.
24-7740P



Modular Crimping Tool
Crimps & Strips 4, 6, 8 & 8 Keyed
Modular Plugs, also works on
AMP & Stewart Connectors.

Part No.	Style
24-4680P	Non-Ratchet
24-4680RP	Ratchet



Pro-Series Impact
Punch Down Tool
Has a 66 & 110 Blade, a
Twist Lock Mechanism, and
Adjustable Impact Control.


Part No.
24-418P



LANtest Remote
Cable Tester
Tests Pinout & Continuity
for 4,6 & 8 pin USOC, RJ-45
568 A&B and Thinnet BNC
Connections.

Part No.
24-517

Keystone Wallplates

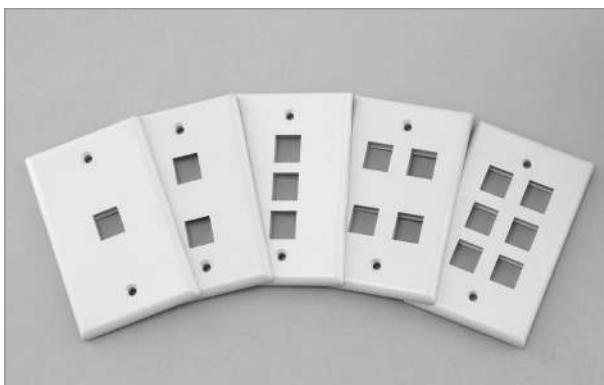



Standard Series Keystone Wallplates
Plastic, Individually Retail Packaged

Ports	Ivory	White
1 Port	30-9209	30-9429
2 Port	30-9210	30-9420
3 Port	30-9211	30-9421
4 Port	30-9223	30-9423
6 Port	30-9212	30-9422


Keystone Jacks

Cat5E RJ-45 Keystone Jacks (8p8c)
ach 110 IDC is color coded for
EIA 568A & 568B termination
and each jack is designed to fit
in any standard keystone wall-
plate or surface mount box.

90°	180°	Color
30-7511	30-7711	Black
30-7512	30-7712	Blue
30-7513	30-7713	Green
30-7514	30-7714	Red
30-7515	30-7715	Yellow
30-7516	30-7716	White
30-7517	30-7717	Orange
30-7518	30-7718	Ivory
-----	30-7719	Gray



90 Cat3 Tool-less Keystone
USOC Jacks (Voice - 6p6c)



Shielded CAT5E RJ-45
Keystone Jacks (8p8c)

Part No	Color
30-9201	Black
30-9201BU	Blue
30-9201RE	Red
30-9201WH	White
30-9201 IV	Ivory

Part No.
33-7720

Keystone Inserts



Keystone Blank
Filler Insert

Part No.	Color
30-9213	Ivory
30-9213W	White



Unshielded Cat 5e RJ-45
Keystone Feed Through
Adapter

Part No.	Color
30-9344B	Black
30-9344I	Ivory
30-9344G	Gray
30-9344W	White



Unshielded Cat 4
RJ-45 Keystone Feed
Through Adapter
Black

Part No.
30-9240




Our Patch Panels and Keystone Jacks are designed to provide a high reliability in data transmissions meeting or exceeding UL and EIA/TIA specifications. Each 110 IDC is color-coded for EIA 568A and 568B termination and each panel is individually boxed and includes 110 IDC dust caps, mounting screws and a disposable 110 IDC termination tool. Our Keystone Jacks and inserts are designed to fit in any standard keystone wallplate or surface mount box. Also see our complete offering of preassembled modular telephone wallplates and biscuit blocks on page 44.

Category 5E Patch Panels

These patch panels are designed to provide a high reliability in data transmissions meeting or exceeding UL and EIA/TIA specifications.

Each 110 IDC is color coded for EIA 568A & 568B termination, and each panel is individually boxed and includes 110 IDC dust caps, mounting screws, and a disposable 110 IDC termination tool.

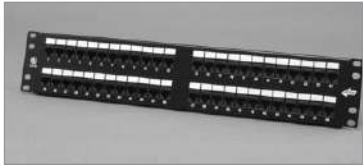


19" Rack Mount Cat5E Patch Panels
RJ-45/110 IDC, EIA 568A/B



Vertical Wall Mount w/Bracket
RJ-45/110 IDC, EIA 568A/B

Part No.	Ports	Description
30-7422AB	16 Port Cat5e	1.75" x 19"
30-7424AB	24 Port Cat5e	1.75" x 19"
30-7448AB	48 Port Cat5e	3.50" x 19"


Part No.	Ports
30-8412AB	12 Port Cat5e

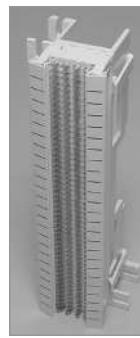

Part No.	Description
30-5760	50 Pair - 66 Block
30-5765	89B Mounting Bracket



Mounting Hardware

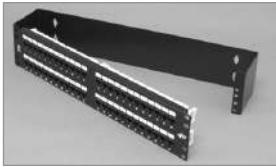

Hinged Wallmount Patch Panel Bracket
5" depth, EIA/TIA Threaded Hole Pattern, Metal, Black



Hinged Wallmount Patch Panel Bracket
12" depth, EIA/TIA Threaded Hole Pattern, Metal, Black

Part No.	Ports	H	W	D
30-5620	12, 16, 24	1.75"	x 19"	x 5"
30-5624	32, 48	3.5"	x 19"	x 5"
30-5648	96	7.0"	x 19"	x 5"
30-5696	128	8.75"	x	19" x 5"

Part No.	Ports	H	W	D
30-5648-12	96	7.0"	x 19"	x 12"

Voice & Data Structured Cabling

Modular Surface Mount Boxes



Single Port Surface Mount Box
Category 4 Screw Termination,
Bottom Entry Wiring

Part No.	Color	Pins
32-2034	Ivory	4
32-2034W	White	4
32-2036	Ivory	6
32-2036W	White	6
32-2038	Ivory	8
32-2038W	White	8



Category 5E Surface Mount Boxes
PC Board Design, RJ-45/110 IDC, EIA
568A & 568B Termination, Plastic
Housing

Part No.	Ports	Color	Pins
30-5198ABi	1 Port	Ivory	8
30-5198ABW	1 Port	White	8
30-5298ABi	2 Port	Ivory	8
30-5298ABW	2 Port	White	8



Dual Cat4 RJ-45 Surface Box
4 or 8 Conductor Screw Termination

Part No.	Color	Pins	Termination
32-2234	Ivory	8	8 Screws
32-2234W	White	8	8 Screws

Single RJ-31X Surface Jack
8 Position with Shorting Bar,
Screw Termination



Part No.	Color	Pins
32-2058K	Ivory	8

Single Port RJ-11 Surface Box
Rear Entry Wiring, Screw
Termination



Part No.	Color	Pins
32-2044	Ivory	4
32-2044W	White	4

Modular Telephone Wallplates



Wallmount Telephone RJ-11 Wallplate

Part No.	Color	Pins	Blister No.
32-1224	Ivory	4	31-1224P
32-1224W	White	4	
			31-1224WP



Single Port Cat 4 Voice & Data Wallplates
Standard Finish

Part No.	Color	Pins
32-1204	Ivory	4
32-1204W	White	4



Single Port Category 4 Telephone Wallplate
Smooth Finish

Part No.	Color	Pins
32-1205	Ivory	4
32-1205W	White	4



Dual Port Telco & CATV Wallplate
RJ-11 & F-81, Standard Finish

Part No.	Color	Pins
32-1324	Ivory	4
32-1324W	White	4



Dual Port Cat 4 Voice & Data Wallplates
Standard Finish

Part No.	Color	Pins
32-1214	Ivory	4
32-1214W	White	4



We offer the most complete line of active and passive CATV interconnection devices from one distribution point. From digital splitters to miniature drop amplifiers to CATV termination accessories, our

products are built to meet the specifications and expectations of your local cable carrier, as well as the home installer. If you don't see the accessory that you need, please call us because chances are that we have it in stock!

CATV Economy Splitters



CATV Economy Splitters
5 MHz to 900 MHz

Features epoxy sealed back plate providing weatherproof protection. Port spacing allows for easy installation of security shields, and each comes complete with a grounding screw.

Part No.	Ports	Style	Bandwidth	Isolation Loss	Insertion Loss
11-4120	2-Way	Horizontal	5 MHz - 900 MHz	20db	3.5db
11-4130	3-Way	Horizontal	5 MHz - 900 MHz	20db	6.5db/1@3.5db
11-4140	4-Way	Horizontal	5 MHz - 900 MHz	30db	6.5db
11-4060	6-Way	Vertical	5 MHz - 900 MHz	30db	10db
11-4080	8-Way	Vertical	5 MHz - 900 MHz	30db	10db

CATV Splitters - 5 MHz to 900



CATV 2-Way, Mini-Splitter
5 MHz to 900 MHz

Part No.
11-4110

Features epoxy sealed back plate. DC Passive 'T' style mini-housing designed for tight spaces. Horizontal port layout.

Isolation loss: 20db
Insertion Loss: 3.5db



Power Passing VHF Splitters
5 MHz to 900 MHz

AC/DC Power Path clearly marked from Input to Output and AC/DC Power Path via Induction from Input to 1 Output. Power Blocking from Input to all Remaining Outputs.

Part No.	Ports	Style	Bandwidth	Isolation Loss	Insertion Loss
11-4820	2-Way	Horizontal	5 MHz - 900 MHz	30db	3.5db
11-4830	3-Way	Horizontal	5 MHz - 900 MHz	30db	6.5db/1@3.5db
11-4840	4-Way	Horizontal	5 MHz - 900 MHz	30db	6.5db

Viewsonics™ Digital Couplers/Drop



Digital Ready Indoor/Outdoor Coupler & Drop Taps
5 MHz to 1 GHz

These high isolation Power Passing Drop Taps, are constructed of precision machined 'F' connectors, mounted on a quality Zinc alloy diecast housing. A tin-plated and solder-sealed backplate provide over 110db RFI shielding and a high degree of anticorrosion protection. Available in Wallplate and 'T' type

DT (T-Type)	DTW (Wallplate)	In	Out	Tap	Tap Value
VSDDT4	VSDPDCW4	1	1	1	4db
VSDDT6	VSDPDCW6	1	1	1	6db
VSDDT8	VSDPDCW8	1	1	1	8db
VSDDT9	VSDPDCW9	1	1	1	9db
VSDDT10	VSDPDCW10	1	1	1	10db
VSDDT14	VSDPDCW14	1	1	1	14db
VSDDT18	VSDPDCW18	1	1	1	18db

Power Passing Drop Taps - 5 MHz to 900

High Isolation Power Passing Drop Taps, 82 Channel UHF/VHF/FM, low loss, plated metal housing with hole for mounting, vertical port



Part No.	In	Out	Tap	Isolation
11-4310-12	1	1	1	12db
11-4310-17	1	1	1	17db
11-4310-23	1	1	1	23db



Part No.	In	Out	Tap	Isolation
11-4320-12	1	1	2	12db
11-4320-17	1	1	2	17db
11-4320-23	1	1	2	23db



Part No.	In	Out	Tap	Isolation
11-4340-12	1	1	4	12db
11-4340-17	1	1	4	17db
11-4340-23	1	1	4	23db

Blocking Coupler & A/B Slide Switch



'F' Voltage Blocking Coupler
Blocks DC and Low Frequency AC Power-
Bandwidth: DC to 1 GHz,
Return Loss 25db, (M) to (F).

Part No.
25-7901



A/B Slide Switch
(2 to 1) or (1 to 2) use for
75 Ohm 'F' Hook-up cable.
Allows quick selection of
Cable, TV, Antenna or VCR.
60db isolation.


Part No.
15-5020

CATV 12- & 16-Way Splitters - 5 MHz to 1 GHz

CATV Platinum Plus Splitter
Vertical, 5 MHz to 1 GHz

Features solder sealed back plate providing 130db RF shielding, a printed circuit design that ensures performance up to 1 GHz, and a specially plated Zinc housing allows for excellent corrosion resistance. Port spacing allows for easy installation of security shields, and each comes complete with a grounding screw.

Part No.	Ports	Housing	Bandwidth	Port to Port Isolation	Insertion Loss
VSPSREP12	12-Way	Vertical Ports	5 MHz - 1 GHz	22db	14db
VSPSREP16	16-Way	Vertical Ports	5 MHz - 1 GHz	25db	15.5db

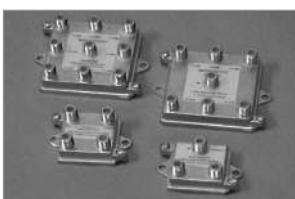CATV Digital Splitters - 5 MHz to 1 GHz

CATV Digital Ready Splitters
Vertical, 5 MHz to 1 GHz

Features solder sealed back plate providing 130db RF shielding, a printed circuit design that ensures performance up to 1 GHz, and a specially plated Zinc housing and 360° port sealing sleeves allow for excellent corrosion resistance. Port spacing allows for easy installation of security shields, and each comes complete with a


CATV Digital Ready Splitters
Horizontal, 5 MHz to 1 GHz

Features solder sealed back plate providing 130db RF shielding, a printed circuit design that ensures performance up to 1 GHz, and a specially plated Zinc housing and 360° port sealing sleeves allow for excellent corrosion resistance. Port spacing allows for easy installation of security shields, and each comes complete with a

Part No.	Ports	Housing	Port to Port		Insertion Loss	Part No.	Ports	Housing	Port to Port		Insertion Loss
			Bandwidth	Isolation					5 MHz - 1 GHz	32db	
VS2WDSV	2-Way	Vertical Ports	5 MHz - 1 GHz	32db		VS2WDS	2-Way	Horizontal Ports	5 MHz - 1 GHz	32db	4.3db
4.3db						VS3WDS	3-Way	Horizontal Ports	5 MHz - 1 GHz	32db	
VS3WDSV	3-Way	Vertical Ports	5 MHz - 1 GHz	32db		4.8/8.6db					
4.8/8.6db						VS3WBDS	3-Way	Horizontal Ports	5 MHz - 1 GHz	28db	7.5db
VS3WBDSV	3-Way	Vertical Ports	5 MHz - 1 GHz	28db	7.5db	Balanced					
	Balanced					VS4WDS	4-Way	Horizontal Ports	5 MHz - 1 GHz	32db	8.6db
VS4WDSV	4-Way	Vertical Ports	5 MHz - 1 GHz	32db	8.6db	VS6WDS	6-Way	Horizontal Ports	5 MHz - 1 GHz	20db	10db
VS6WDSV	6-Way	Vertical Ports	5 MHz - 1 GHz	33db	11.1db	VS8WDS	8-Way	Horizontal Ports	5 MHz - 1 GHz	20db	12db

CATV Digital Amplifiers - 54 MHz to 1 GHz

Mini Drop Amplifier
54 MHz to 1 GHz (Boxed)

This compact digital ready amplifier is designed for restricted spaces and drop boxes, and features 6 KV combination wave surge protection, triple plated Zinc housing for maximum corrosion protection, precision machined brass 'F' Connectors and an Internal Diplexor for increased band isolation. Power Adapter included.


Single Sided Mini Drop Amplifier
54 MHz to 1 GHz (Boxed)

This compact digital ready amplifier has all ports on one side for use in restricted spaces and drop boxes, and features 6 KV combination wave surge protection, triple plated Zinc housing for maximum corrosion protection, precision machined brass 'F' Connectors and an internal Diplexor for increased band isolation. Power Adapter included.


Digital Ready Drop Amplifier
54 MHz to 1 GHz (Boxed)

This full-size Amplifier features 6 KV combination wave surge protection, triple plated Zinc housing for maximum corrosion protection, diecast Zinc plated 'F' Connectors and an Internal Diplexor for increased band isolation. Power Adapter included, and available with or without Power Inserter. Power Adapter included.

Part No.
VSMA601C
VSMA602C
VSMA604C
VSMA608C

Part No.
VSMA611C

Ports	w/o Power Inserter	w/Power Inserter
1	VSA601C	VSA601CPI
4	VSA604C	VSA604CPI
8	VSA608C	VSA608CPI

TV/CATV Devices

CATV Coaxial Amplifiers



1 Way 25db TV/VCR Amplifier
54 MHz to 900 MHz (Boxed)

Covers Mid & Super Bands 54 to 90 MHz, switchable FM Trap, 75 Ohm Input & Output, uses 110VAC Power Source, has built-in lightning protection, constructed with a heavy metal case, On/Off Light and a Low Noise-Integrated Circuit.

Gain: 25db VHF, 23db UHF
Noise: Low 5.4db, High 6.2db, UHF 14db
FM Trap Attenuation: 20db 95-108 MHz

Part No.
14-4999



1 Way 30db TV/VCR Amplifier
with Adjustable Gain
54 MHz to 900 MHz (Boxed)

Solid State UHF/VHF/FM Amplifier, 30db gain with Adjustable Gain Control, switchable FM Trap, 75 Ohm Input & Output, uses 110VAC Power Source, constructed with a heavy metal case, UL listed.

Gain: 30db VHF, 26db UHF
Bandwidth: VHF 50-450 MHz
UHF 470-890 MHz

Part No.
14-4952

CATV Modulator &



Channel 3 Signal Combiner
Has six-stage bypass/bandstop filter with adjustable balancing attenuators, enabling the use to combine a channel 3 output signal from a STV, MDS, VCR or Video Game device with an existing MATV System containing adjacent channel 2 and 4. The filtering system provides excellent harmonic reduction from all types of modulators used in STV, MDS or VCR units. Individually boxed.

Part No.
15-5883



RF Modulator
Receives Composite Audio & Video Signals from your VCR, Computer or other sources, and feeds RF signals to your TV set. Selectable channel 3 or 4 output, instructions included. Individually boxed.

Part No.
14-5641

Attenuator Pads



'F' Mini-Attenuator Pads
Nickel Plated,
Accuracy within 5%,
Return Loss 20db, 22
AWG Center Pin, DC to
1 GHz Bandwidth,
(M) to (F)

Part No.	Attenuation
FLN1G	1db
FLN2G	2db
FLN3G	3db
FLN6G	6db
FLN8G	8db
FLN10G	10db
FLN12G	12db
FLN16G	16db
FLN20G	20db

CATV/SATV Accessories



Satellite & CATV
Grounding Blocks
with Brass F-81 connectors and
Zinc diecast block, includes
2 mounting and grounding
screws.

Part No.	Style	Frequency
12-2001	Single	2 GHz
12-2002	Dual	2



CATV F-81 Grounding Blocks
Zinc diecast, includes
2 mounting screws.

Part No.	Style	Frequency
25-7220	Single	900 MHz
25-7221	Dual	900 MHz



CATV F-81 Grounding Blocks
Zinc diecast, includes
2 mounting screws.

Part No.	Style	Frequency
VSGB1-2G	Single	2GHz
VSGB2-2G	Dual	2GHz



Plastic Feed Thru Bushings

Part No.	Size	Style	Color
25-7230	RG-59	Single	White
25-7240	RG-58	Single	Black
25-7231	RG-6	Single	White
25-7241	RG-6	Single	Black



Plastic Cable Clips
with Mounting Nail.

Part No.	Size	Style	Color
25-7250	RG-59	Single	White
25-7260	RG-59	Single	Black
25-7251	RG-6	Single	White
25-7261	RG-6	Single	Black
25-7263	RG-6	Dual	Black



COAX Seal
1/2" x 60" Moldable plastic.
Seals fittings from moisture,
Sold in 12 packs



Quick Disconnect
Matching Transformer
with Piercing Screws, Plastic.

Input: 75 Ohm
Output: 300 Ohm
VHF/UHF

Part No.
25-7955

Part No.
10-2280

TV/CATV/Satellite - F-81 Wallplates



CATV/Satellite Wallplate with
2 GHz F-81 Connector
Flush Mount, Plastic

Part No.	Color	Ports
25-777012	Ivory	Single
25-7770W2	White	Single
25-789012	Ivory	Dual
25-7890W2	White	Dual



Blank F-81 Wallplate
3/8" Center hole,
Flush Mount, Plastic

Part No.	Color	Ports
25-7750W	White	Single
25-7750	Ivory	Single
25-7790	Ivory	Dual



Dual Port Telco & CATV
Wallplate
RJ-11 & F-81, Flush Mount,
Plastic

Part No.	Color	Ports
32-1324	Ivory	Dual
32-1324W	White	Dual

Tools & Test Equipment

Cable & Network Test Equipment



Network Installers Kit

This tool kit is a complete LAN tool kit designed for the datacom/network consultant, installer, or value user. It comes complete with a 24-LANTEST Network Tester, plus Crimper, Coaxial Stripping Tool, Pro-Series Punch Down Tool and Modular Plugs in convenient zipper type carrying case.

Part No. 24-LANKIT

LANKIT Includes:

- | | |
|----------------|------------------------------|
| (1) 24-4680P | RJ-11/12/45 Crimper |
| (1) 24-418P | 66/110 Impact Punch Tool |
| (1) 24-7742P | Pocket Stripper & Punch Tool |
| (1) 24-LANTEST | Network Tester w/case |
| (1) ----- | Fabric Zipper Carrying Case |

*Also includes a mix of RJ-11/12/45 Plugs and an assortment of colored RJ-45 Strain Relief Boots.

Cable Tester Kits



Part No. 24-517

Tester Package Includes:

- (2) BNC Adapter Cables, 15 cm
- (1) BNC Adapter (M) to (M)
- (1) 6" RJ-45 Modular Cable
- (1) Deluxe Carrying Bag

LAN & Modular Cable Tester

This tester is designed to quickly read the correct pin configuration of 10/100 Base-T Cable (Cat 5/SE/6), 10 Base-2 Cable (coax), USOC RJ-45/RJ-11 Modular Cables, 356A, EIA/TIA-568A/B and Token Ring cables. With the remote terminator it can test cables installed up to 1,000 feet away through wall- plates and patch panels. It features auto or manual scan with pin-out LED indicators, it verifies cable continuity, opens, shorts, and reversed pairs, and it can check the cable ground. In addition, a power switch is provided for conserving battery power, and



Part No. 24-LANTEST

LAN & USB Cable Tester Kit

This tester is a palm-sized unit with four different testing ports: RJ-45, RJ-11, USB, and BNC for the testing of today's most popular media. It can be used to verify the condition of cables, both before and after their installation. A passive module can be detached for testing the remote end of installed network cabling. One button testing offers easy operation and multiple LEDs give clear testing results. The unit will also automatically shut off when not in use. Carrying case included.



Part No.
24-513

Network Cable Tester

Quickly tests popular network cable wiring such as 258A specified by AT&T or 10/100 BaseT-Ethernet standard. It is equipped with a set of dip switch and jumpers, which allows you to test the pin-out status or custom configure as needed. Leather carrying case included.



With such a large complement of connectors to offer, it is only fitting that you'll find an equally complete offering of **Emerson** termination tools. This line of products includes both ratchet and non-ratchet crimp tools for coaxial, modular plugs, and D-Sub connectors. In addition, you will find a wide array of cable strippers, cutters, impact and nonimpact punch down tools, and a variety of multi-meters, cable testers and termination tool kits to meet your needs.

Pro-Series 110 & 66 Impact Punch Down Tools



Pro-Series Impact Punch Down Tool
Tool includes two blades. A 66 standard with a 110 installed in the handle. It has a Twist Blade Locking Mechanism, and an adjustable "Hi-Lo" Impact Control. (Replacement Blades are interchangeable with Harris™ Blades.)

Part No.	Blade No.
24-418P	99-418 (110 only)
	99-419 (66 only)

Non-Impact Punch Down



Non-Impact Punch Down Tool
for 66 & 110 type terminations (punch only) with a reversible blade, 66 on one end and 110 on the other end.

Part No.
24-410P

Non-Impact Punch Down Tool
for 66 type terminations (punch & cut) with a reversible blade, 66 punch on one end and a 66 cut on the other end.

Part No.
24-411P

Keychain Punch Down Tools



Keychain Punch Tool
for UTP/STP 110 IDC Terminations.



Pocket Stripper & Punch Tool
for UTP/STP 110 IDC Terminations.

Part No.
30-7207

Part No.
24-7742P

Tools & Test Equipment

Modular Plug Crimping Tools



Modular Crimping Tool
that cuts, strips and ter-
minates 4, 6, 8, & 8 Keyed
Modular Plugs. (Works on
AMP™ & Stewart™ Plugs.)

Non-Ratchet No. 24-4680P
w/ Ratchet No. 24-4680RP



Modular Crimping Tool
that cuts, strips and ter-
minates 2, 4, 6, 8, & 8 Keyed
Modular Plugs. (Will not work
on AMP™ RJ-45 Plugs.)

Non-Ratchet No. 24-4681P
w/ Ratchet No. 24-4682P



Deluxe Modular Crimping Tool
that cuts, strips and terminates
2, 4, 6, 8, and 8 Keyed, 10, DEC
4 & 6 and 4 Conductor Handset
Plugs. (Works on AMP™
RJ-45 Plugs only.)

w/ Ratchet No. 24-7865P



Economy Modular Crimping Tool
for RJ-11/12 Plugs. Cuts, strips
and terminates 2, 4 and 6 Pin
Modular Plugs.

Blister No. 24-7746P



Economy Modular Handset
Crimping Tool
for RJ-22 Plugs. Cuts, strips and
terminates 4 Pin Handset Plugs.

Blister No. 24-7749P



Economy Modular RJ-45
Crimping Tool
that cuts, strips and terminates
8 & 8 Keyed Modular Plugs.

Blister No. 24-7748P

Wire Cutters & Strippers



Heavy Duty Cable Cutter
for cutting RG-8 Cable and
Multi-Conductor Cable up to
.500".

Blister No. 24-7378P



5" Cutter & Stripper
Thin profile,
Carbon Steel

Blister No. 24-7376P



All Purpose Utility Tool
Wire Stripper, Cutter, Plier &
Crimper, strips 10 to 18 AWG Wire

Blister No. 24-7371P



5" Cutter Economy Stripper
Adjustable control, Return
Spring, Carbon Steel

Blister No. 24-7375P

D-Sub Crimping & Termination Tools



D-Sub Full Cycle Ratchet Crimping Tool
Crimps 10-22 AWG Non-Insulated
Open Barrel Connectors, D-Sub &
V.35 Contacts.

Blister No. 24-8644P
Replacement Die No. 99-8644



D-Sub Full Cycle Ratchet Crimping Tool
with Tension Adjustment Wheel,
crimps 18-22 & 24-30 AWG,
Non-Insulated Open Barrel
Connectors, D-Sub Contacts.

Blister No. 24-8645P



D-Sub Crimping Tool
for Precision Machined Contacts,
4 Way Indent, Crimps 20-26
AWG with Built-in Contact
Locator.

Blister No. 24-8643P



Insulated Terminal Ratchet
Crimping Tool
Crimps 10-22 AWG fully
insulated terminals in an
ovalized crimp.


Blister No. 24-8622P
Replacement Die No. 99-8622

**See our wide
selection of D-Sub
components on pages 26-29.**



D-Sub Non-Ratchet Crimp Tool
Crimps Non-Insulated Open
Barrel Connectors & Contacts.

Blister No. 24-7373P



Automatic Trigger Stripper
for stripping Stranded Multi-
conductor Cable and Solid
Conductor Cable, 14-22 AWG.

Blister No. 24-4550P



4" Universal UTP Stripping Tool
for Round or Flat Wire and
UTP Cable from 3.5 mm-9
mm max. Even irregular
outshape of insulation can
be put into the V and U slots
. Strips 2, 4, 6 & 8 Conductor.
Flat or Round, Solid or
Stranded Cable.

Blister No. 24-7740P



Automatic Wire Stripper
Designed for Radio, TV &
Computer and Telephone
cabling applications to
cut and strip insulation auto-
matically.

Blister No. 24-4700P
size: 0.5-2.0 mm

Blister No. 24-4710P
size: 1.0-3.2 mm

D-Sub Insertion Tools



Standard D-Sub Insertion
& Extraction Tool

Part No.
40-9865



High-Density D-Sub
Insertion & Extraction Tool

Part No.
40-9427T

Tools & Test Equipment

'Compression Connector Crimping Tools



Compression Crimp Tool
For RG-59 & RG-6 Snap-N-Seal® compatible
20.3mm (F) Connectors..

Blister No. 24-7713P



All-In-One Adjustable Ratchet Crimp Tool
for all types of BNC, F and RCA
Compression Connectors

New!

Blister No. 24-7714P

Economy 'F' Series Crimping



Economy Hex Crimping Tool
for RG-6 & RG-59. Economy
packaged in non-retail box.

Boxed No. 24-7709H



Standard Crimping Tool
for RG-6 & RG-59. Economy
packaged in non-retail box.

Boxed No. 24-7700



Standard Crimping Tool
for RG-6 & RG-59. Includes
(10) No. 25-7050 'F-59A'
Connectors with attached 1/8"
Ring.

Blister No. 24-7700P

Heavy Duty 'F' Hex Crimping



Deluxe Hex Crimping Tool
for RG-8, 11 & 213.
Hex Sizes: .10", .322", .448"

Boxed No. 24-7711P



Deluxe Hex Crimping Tool
for large O.D. Cables, RG-6,
RG-11 & UHF RG-8.
Hex Sizes: .10", .359", .406"

Blister No. 24-7712P



Deluxe Hex Crimping Tool
for large O.D. Cables, RG-6 &
RG-59. Economy packaged in
non-retail box.
Hex Sizes: .255", .322"

Boxed No. 24-7710



Deluxe Hex Crimping Tool
for RG-6 & RG-59, retail packaged
with (10) No. 25-7030 'F-59ALM'
Connectors with attached 1/2"
Gripped Ring. Hex Sizes: .255",
.322"

Blister No. 24-7710P

Universal Coaxial Crimping Tools



Universal Ratchet Crimping Tool
for BNC, TNC & Mini UHF.
Five crimp sizes for Pins &
Connector Ferrules. Crimps
2 & 3 piece Connectors.
Features adjustable crimp
pressure and quick release
safety latch.

Blister No. 24-9960P

Hex Size	Use For
.068"	Center Conductor (16-22 AWG)
.110"	Center Conductor (10-13 AWG)
.213"	Ferrule for RG-58/59TFE/141/303/55/142/233/400
.255"	Ferrule for RG-59/62/140/210/Belden 8279
.324"	Ferrule for RG-6/143/212/222/Belden 8281,9231,9141

Replacement Frame & Dies:

Part No.	Description	Hex Sizes
99-DC-5	Die - 2 pc BNC & TNC	.320", .385"
99-N-8	Die - 'N' (RG-8 Hex)	.110", .405
99-U-8	Die - 'UHF' (RG-8 Diamond)	.110", .405
99-9960	Die - BNC, TNC & MiniUHF	See 24-9960P sizes above
*99-9960F	Replacement Frame	-----

*Note: All dies listed on this page are interchangeable with this Tool



Blister No.
24-8866P

'F' Ratchet Crimping Tool
Crimps RG-59, RG-6, and
RG-Quad Shield 'F' type
CATV connectors. Features
adjustable crimp pressure
and quick release safety
latch.

Hex Sizes: .255", .324", .354"



Blister No.
24-8865P

Ratchet Crimping Tool for
Twin-Ax
9" Ratchet Crimp Tool.
For Twin-Ax Ferrule and
Contacts. Features adjust-
able crimp pressure and
quick release safety latch.
Hex Sizes: .429", .075", .075"

Standard Series Ratchet Crimping Tools



This series of tools offers a wide selection of interchangeable dies, a high quality steel frame with a full cycle ratchet mechanism and a quick release safety latch. All are blister packaged for retail display.

Tool Part No.	Cable Size	Description	Hex Sizes	Die Part #
24-328P	RG-58, RG-161, RG-178, RG-174, RG-182, RG-188, RG-316	SMA, SMB, Fiber .	.043", .069", .100"	99-328
24-8856P	RG-6, RG-8 RG-59, RG-62	Crimps BNC-TNC 3 pc. Connectors with standard rings	.128", .151", .210" .390", .275", .065"	99-8856
24-8857P	RG-58, RG-58AU RG-139, RG-185 RG-188, RG-316	Crimps BNC-TNC 3 pc. Connectors with standard rings	.235", .128", .065"	99-8857
24-8858P	RG-58, RG-58AU, RG-59	Crimps BNC-TNC Teflon, RG-62 Teflon & 3 pc. Connectors also crimps 1/2" ring 'F' Connectors	.325", .210", .065"	99-8858
24-8859P	RG-59, RG-62 Belden 8281	Crimps BNC-TNC 2 & 3 pc. Connectors with standard & dual crimp rings	.325", .258", .066"	99-8859
24-8789P	RG-58, RG-59, RG-62, RG-58TFE, RG-59TFE, RG-62TFE	Crimps BNC & TNC 2 & 3 pc. Connectors . with standard crimp rings by AMP, Kings and Amphenol	.257", .210", .060"	99-8789
24-9858P	RG-58, RG-59TFE	Crimps 2 pc. BNC & TNC Connectors	.320", .211"	99-9858
24-9859P	RG-59, RG-62	Crimps 2 pc. BNC & TNC Connectors	.320", .250"	99-9859
24-9958P	RG-58, RG-58TFE, RG-59TFE, RG-141TFE, RG-142, RG-223, RG-400 RG-303, RG-55	Crimps 3 pc. BNC-TNC & Mini-UHF Connectors	.213", .060"	99-9958
24-9959P	RG-59, RG-62, RG-450	Crimps 3 pc. BNC-TNC Proflex, . RG-8X & Mini-UHF Connector	.255", .060"	99-9959
24-9912P	RG-122, 180, 34M RG-195, 8218, RG-174 188, RG-179, 187, 316	Crimps 3 pc. BNC-TNC Connectors .	.184", .060"	99-9912
24-8644P	Open Barrel Crimper V.35 Contacts, 10-22 AWG	Crimps open barrel Non-insulated Connectors D-sub, Mini pins & sockets	-----	99-8644
*99-frame-9"	-----	9" Frame for Standard Ratchet Tools	-----	

*Note: All standard series dies on this page are interchangeable with this Tool Frame.

Offset Ratchet Crimping



Ratchet Crimping Tool for 2- & 3-Piece Crimp Connectors. Offset die with 3 crimp sizes for Pins & Connector Ferrule including 'F' Connectors and RG-58 & 59TFE Cable. Features adjustable crimp pressure and quick release safety



Ratchet Crimping Tool for 3-Piece Crimp Connectors. Offset die with 3 crimp sizes for Pins & Connector Ferrule including RG-58 & 59TFE Cable. Features adjustable crimp pressure and quick release safety latch.

Part No.
24-8861P

Hex Size	Use For
.060"	Center Conductor
.210"	Ferrule for RG-58/141/303/55/142/233/400
.320"	Ferrule for RG-6/143/212/222/Belden 8281,9231,9141

Part No.
24-8860P

Hex Size	Use For
.060"	Center Conductor
.210"	Ferrule for RG-58/141/303/55/142/233/400
.255"	Ferrule for RG-59/62/140/210/Belden 8279

Tools & Test Equipment

Self-Adjusting Coax Strippers



2-Step Cable Stripper
with self-adjusting replace-
ment blades for RG-6, 58, 59
& 62.

Blister No. Blades No.
24-7732P



3-Step Cable Stripper
with self-adjusting replace-
ment blades for RG-6, 58, 59
& 62.

Blister No. Blades No.
24-7733P

3-Step Coax Strippers



3-Step Cable Stripper
with adjustable replace-
ment blades for standard
& Teflon RG-58, 59 & 62.

Blister No. Blades No.
24-7737P
99-7737



3-Step Cable Stripper
with adjustable replace-
ment blades for standard
& Teflon RG-59, RG-6 &
Belden 8281.

Blister No. Blades No.
24-7738P



3-Step Cable Stripper
with non-adjustable
replacement blades RG-8,
11 & 213.

Blister No. Blades No.
24-7739P

2-Step Coax Strippers



2-Step Cable Stripper
with adjustable replace-
ment blades for standard
& Teflon RG-58, 59 & 62.

Blister No. Blades No.
24-7735P
99-7735



2-Step Cable Stripper
with adjustable replace-
ment blades for standard
& Teflon RG-59, RG-6 &
Belden 8281.

Blister No. Blades No.
24-7736P



2-Step Cable Stripper
with non-adjustable
replacement blades RG-8,
11 & 213.

Blister No. Blades No.
24-7731P



Universal 2-Step Cable Stripper
with adjustable replacement
blades for RG-6, 58, 59 & 62.

Blister No. Blades No.
24-7734P
99-7734




2-Step Cable Stripper
with adjustable replacement
blades for RG-6, 58, 59 & 62.
Poly bagged.

Part No.
VSCST-1B

Nylon Cable Ties

Multi-Use Nylon Cable Ties

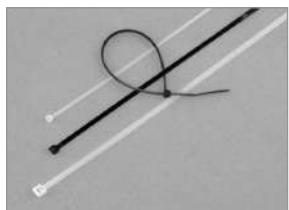

Strength	Color	Length	Width	1,000 Pack	500 Pack	100 Pack
18 lbs.	Natural	4"	0.10"	9201M	-----	9201C
18 lbs.	Natural	8"	0.10"	9203M	-----	9203C
40 lbs.	Natural	8 1/2"	0.15"	9204M	-----	9204C
40 lbs.	Black	8 1/2"	0.187"	9207M	-----	9207C
40 lbs.	Natural	11 5/8"	0.187"	9205M	-----	9205C
40 lbs.	Black	11 5/8"	0.187"	-----	-----	9208C
40 lbs.	Natural	14 5/8"	0.187"	-----	9206D	9206C
40 lbs.	Black	14 5/8"	0.187"	-----	9209D	9209C

Tool & Work Bench Accessories

Deluxe White Magnifying Lamp



This lamp has a strong extendable 45" white enameled steel arm for precise positioning and a heavy-duty clamp for desk edge, table or fixed horizontal surface mounting. It is designed with a 5" diameter lens for extra magnification for reading, hobbies or close work to prevent eye strain, a 22W fluorescent circular tube for work area illumination, and a 3 conductor cord set with outlet. Lamp is individually packaged in an attractive Retail Box and is sold in cases of four.

Part No.
39-100



6" 'F' Nutdriver
This 7/16" Nutdriver is designed for 'F' Connector removal and installation.

Part No.
24-3306P



Alligator Clip Jumpers
2-ft. lengths, 26 AWG,
5 Colors (2 per Color)

Part No.
46-400



Rosin Core Solder Tubes of 60/40
120 inches, 24 tubes per
Counter Display Box

Part No.
46-502



Plastic Electrical Tape
Black, 3/4" x 60 ft.,
individually
Cellophane
Wrapped, 10 in a pack.


Part No.
25-7950

Power Supplies & Adapters



We offer a diverse selection of AC and DC power adapters for general use for the international traveler requiring power conversion; to the bench tech requiring a heavy-duty power supply; or to the everyday computer user requiring PC surge protection. As a division of Emerson Network Power, if we don't have the power converter that you require, we can put you in touch with the Emerson division that does.

AC Surge Protectors

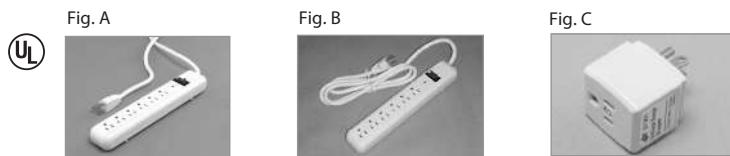

Part No.	Style	AC Outlets	Cord (feet)	MOV's	EMI/RFI	Data Port	Figure
37-004	Strip	6	4	1	No	No	A
37-006	Strip	6	4	1	Yes	No	B
37-301	Wall Cube	1	—	1	No	No	C

AC/DC Power Supplies (Individually Boxed)



Part No.	Input AC	Output DC	Amps	Protection	Binding Posts	Weight	Dimensions	Figure
38-381	115VAC	13.8VDC	10A	Fuse	No	9 1/2 lbs.	6.75" x 6.5" x 4.5"	A
38-382	115VAC	13.8VDC	20A	Fuse	Yes	16 lbs.	11.25" x 7.75" x 5"	B
38-383	115VAC	13.8VDC	3A	Fuse	Yes	3 1/2 lbs.	7" x 3.5" x 2.75"	C
38-384	115VAC	13.8VDC	4A	Fuse	Yes	5 1/2 lbs.	7.5" x 4.75" x 3"	C
38-386	115VAC	13.8VDC	6A	Fuse	No	3 1/3 lbs.	7.25" x 6.25" x 4"	A

AC/DC Power Adptres



1600 Watt Foreign Travel Converter/
Transformer Kit
Converts 240 VAC into 120 VAC to
operate electrical equipment for up
to 1600 Watts usage, and includes
5 interchangeable adapters.

Part No. 37-3516K



AC Adapter 500 MA
Multi Voltage Heavy Duty Model
• With Multi-Plugs
• For Converting 117 Volts, AC Home
Current to Low Voltage, DC Current
to Operate Battery Powered
Equipment. (3V, 4.5V, 6V, 7.5V, 9V,
12V)

Blister No. 38-305



AC Adapter 1200 MA
Multi-Voltage Heavy Duty Model
• With Multi-Plugs
• For Converting 117 Volts, AC Home
Current to low Voltage DC Current
to Operate
Battery Powered Equipment. (1.5V,
3V, 4.5V, 6V, 7.5V, 9V, 12V)
• Boxed

Part No. 38-313

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
10-2280.....	49	19-1706.....	24, 36	24-7746P.....	52	25-7121.....	17
11-4060.....	45	19-2500-10PB	23	24-7748P.....	52	25-7140.....	19
11-4080.....	45	19-2502-10PB	23	24-7749P.....	52	25-7141.....	19
11-4110.....	45	19-2502G-10PB	23	24-7865P.....	52	25-7146.....	17
11-4120.....	45	19-2503-10PB	23	24-8622P.....	53	25-7150.....	16
11-4130.....	45	19-2504-10PB	23	24-8643P.....	27, 53	25-7160.....	16
11-4140.....	45	19-2505-10PB	23	24-8644P.....	27, 53, 55	25-7180.....	16
11-4310-12.....	46	19-2506-10PB	23	24-8645P.....	27, 53	25-7190.....	17
11-4310-17.....	46	19-2600-10PB	23	24-8789P.....	55	25-7191.....	17
11-4310-23.....	46	19-2601G-10PB	23	24-8856P.....	55	25-7192.....	17
11-4320-12.....	46	19-2602-10PB	23	24-8857P.....	55	25-7200.....	18
11-4320-17.....	46	19-2603-10PB	23	24-8858P.....	55	25-7200L.....	18
11-4320-23.....	46	19-2604-10PB	23	24-8859P.....	55	25-7210.....	18
11-4340-12.....	46	19-2605-10PB	23	24-8860P.....	55	25-7220.....	49
11-4340-17.....	46	19-2606-10PB	23	24-8861P.....	55	25-7221.....	49
11-4340-23.....	46	24-328P.....	55	24-8865P.....	54	25-7230.....	49
11-4820.....	45	24-3306P.....	57	24-8866P.....	16, 54	25-7231.....	49
11-4830.....	45	24-410P.....	51	24-9858P.....	55	25-7240.....	49
11-4840.....	45	24-411P.....	51	24-9859P.....	55	25-7241.....	49
12-2001.....	49	24-418P.....	47, 63	24-9912P.....	55	25-7250.....	49
12-2002.....	49	24-4550P.....	53	24-9958P.....	55	25-7251.....	49
14-4952.....	48	24-4680P.....	41, 52	24-9959P.....	55	25-7260.....	49
14-4999.....	48	24-4680RP	41, 52	24-9960P.....	54	25-7261.....	49
14-5641.....	48	24-4681P.....	52	24-LANKIT.....	50	25-7263.....	49
15-5020.....	46	24-4682P.....	52	24-LANTEST.....	50	25-7270.....	15
15-5883.....	48	24-4700P.....	53	25-2200.....	19	25-7280.....	17
19-1201.....	24	24-4710P.....	53	25-2202.....	19	25-7290.....	22
19-1202.....	24	24-513	50	25-2203	19	25-7300.....	13
19-1203.....	25	24-517	41, 50	25-2502-10PB	16, 23	25-7305.....	13
19-1204.....	25	24-7371P.....	52	25-2502G-10PB.....	16, 23	25-7310.....	13
19-1205.....	22	24-7373P.....	27, 53	25-2601-10PB	16, 23	25-7320.....	13
19-1206.....	22	24-7375P.....	52	25-2601G-10PB.....	16, 23	25-7330.....	13
19-1207.....	22	24-7376P.....	52	25-7000.....	17	25-7340.....	13
19-1212.....	22	24-7378P.....	52	25-7000G	17	25-7350.....	13
19-1213.....	22	24-7700.....	54	25-7010.....	17	25-7362.....	13
19-1237.....	25	24-7700P.....	54	25-7020.....	17	25-7365.....	10, 13
19-1238.....	25	24-7709H	54	25-7030.....	17	25-7420.....	9, 13
19-1268.....	22	24-7710.....	17, 54	25-7031.....	17	25-7430.....	10
19-1303.....	22	24-7710P.....	66	25-7032.....	16	25-7500.....	10, 19
19-1304.....	22	24-7711P.....	54	25-7033.....	16	25-7510.....	10, 24
19-1310.....	22	24-7712P.....	54	25-7034.....	16	25-7530.....	19, 24
19-1312.....	22	24-7713P.....	54	25-7035.....	17	25-7540.....	19, 25, 34
19-1313.....	22	24-7714P.....	54	25-7036.....	16	25-7550.....	13, 19
19-1315.....	22	24-7714P.....	23, 54	25-7040.....	18	25-7560.....	24, 34
19-1316.....	22	24-7731P.....	56	25-7047.....	16	25-7570.....	19, 24
19-1318.....	22	24-7732P.....	23, 56	25-7049.....	17	25-7580.....	19, 24
19-1319.....	22	24-7733P.....	56	25-7050.....	17	25-7600.....	19
19-1640P.....	34	24-7734P.....	56	25-7056.....	16	25-7620.....	18
19-1645P.....	34	24-7735P.....	56	25-7066.....	16	25-7630.....	18
19-1670P.....	24, 36	24-7736P.....	56	25-7080.....	17	25-7640.....	18
19-1671P.....	24, 36	24-7737P.....	56	25-7081.....	17	25-7650.....	18
19-1672P.....	24, 36	24-7738P.....	56	25-7090.....	18	25-7651.....	18
19-1673P.....	24, 36	24-7739P.....	56	25-7100.....	17	25-7652.....	18
19-1701.....	24, 36	24-7740P.....	41, 53	25-7110.....	18	25-7654.....	18
19-1702.....	23	24-7742P.....	51	25-7120.....	17	25-7660.....	18

Product Index

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
25-7670.....	18	27-8471.....	8	27-9191.....	9	28-91477.....	5
25-7680.....	18	27-8478.....	15	27-9200.....	9	28-91507.....	5
25-7690.....	22	27-8479.....	15	27-9201.....	9	28-91557.....	5
25-7750.....	49	27-8483.....	15	27-9204.....	9	29-3100.....	15
25-7750W.....	49	27-8484.....	15	27-9205.....	9	29-3103.....	15
25-7770I2.....	49	27-8485.....	15	27-9208.....	9	29-3835.....	10, 15
25-7770W2.....	49	27-9000.....	9	27-9209.....	9	29-3840.....	11, 15
25-7790.....	49	27-9001.....	9	27-9210.....	9	29-3855.....	10, 15
25-7890I2.....	49	27-9002.....	9	27-9235.....	9	29-4021.....	12
25-7890W2.....	49	27-9003.....	9	27-9236.....	9	29-4030.....	12
25-7950.....	57	27-9004.....	9	27-9241.....	9	29-4031.....	12
25-7955.....	49	27-9006.....	9	27-9245.....	8	29-4035.....	12
25-7958BK.....	15	27-9007.....	8	27-9246.....	8	29-4100.....	12, 14
25-7958BU.....	15	27-9008.....	8	27-9254.....	9	29-4105.....	12, 14
25-7958GN.....	15	27-9009.....	9	27-9278.....	14	29-4110.....	12
25-7958RE.....	15	27-9010.....	9	27-9293.....	9	29-4130.....	12
25-7958YE.....	15	27-9012.....	9	27-9294.....	10	29-4140.....	12, 13
25-7959BK.....	15	27-9013.....	9	27-9300-10.....	8	29-4145.....	12, 13
25-7959BU.....	15	27-9014.....	9	27-9300-20.....	8	29-4150.....	9, 12
25-7959GN.....	15	27-9015.....	9	27-9300-3.....	8	30-1004UL.....	41
25-7959RE.....	15	27-9017.....	14	27-9300-6.....	8	30-1004W.....	41
25-7959YE.....	15	27-9020.....	9	28-2502-10PB.....	23	30-1006UL.....	41
25-7960BK.....	15	27-9021.....	9	28-2502G-10PB.....	23	30-1006W.....	41
25-B174.....	15	27-9022.....	9	28-2601-10PB.....	23	30-1008KUL.....	41
25-B58.....	15	27-9023.....	9	28-2601G-10PB.....	23	30-1284AB-10.....	31
25-B58TN.....	15	27-9032.....	8	28-5020.....	15	30-1284AB-3.....	31
26-8000.....	11	27-9033.....	8	28-5021.....	15	30-1284AB-6.....	31
26-8009.....	11	27-9036.....	8	28-5022.....	15	30-1506MF.....	31
26-8010.....	11	27-9038.....	8	28-74307.....	6	30-1506MM.....	31
26-8011.....	11	27-9046.....	14	28-75007.....	6	30-1510MF.....	31
26-8012.....	11	27-9050.....	8	28-81007.....	6	30-1510MM.....	31
26-8013.....	11	27-9051.....	8	28-81417.....	6	30-1511-10.....	31
26-8014.....	11, 13	27-9052.....	8	28-81507.....	6	30-1511-6.....	31
26-8015.....	11, 13	27-9053.....	8	28-84707.....	6	30-1611-1.....	34
26-8016.....	11	27-9054.....	8	28-90007.....	6	30-1611-2.....	34
26-8017.....	10, 11	27-9056.....	8	28-90027.....	6	30-1611-3.....	34
26-8018.....	10, 11	27-9057.....	8	28-90047.....	6	30-1611-5.....	34
26-8020.....	11, 19	27-9058.....	8	28-90097.....	6	30-1612-1.....	34
26-8023.....	11	27-9059.....	8	28-90137.....	6	30-1612-2.....	34
27-4034.....	12	27-9067.....	14	28-90157.....	6	30-1612-3.....	34
27-8100.....	10, 19	27-9068.....	14	28-90237.....	5	30-1612-5.....	34
27-8110.....	10, 24	27-9069.....	14	28-90257.....	5	30-3006-10.....	30
27-8120.....	10, 13	27-9075.....	14	28-90337.....	6	30-3006-15.....	30
27-8130.....	10	27-9078.....	14	28-90507.....	6	30-3006-6.....	30
27-8140.....	10	27-9079.....	14	28-90527.....	6	30-3007-10.....	30
27-8141.....	10	27-9100.....	9	28-90537.....	6	30-3007-15.....	30
27-8142.....	10	27-9101.....	9	28-90547.....	6	30-3007-3.....	30
27-8150.....	10	27-9102.....	9	28-90567.....	6	30-3007-6.....	30
27-8200.....	13, 19	27-9103.....	9	28-90577.....	6	30-3008-6.....	30
27-8210.....	13, 24	27-9104.....	9	28-91007.....	5	30-4809F.....	29
27-8250.....	10, 14	27-9105.....	9	28-91027.....	5	30-4809M.....	29
27-8260.....	13, 14	27-9108.....	9	28-91037.....	5	30-4PP15.....	35
27-8460.....	8	27-9119.....	9	28-91047.....	5	30-4PP25.....	35
27-8461.....	8	27-9189.....	9	28-91057.....	5	30-4PP7.....	35
27-8470.....	8	27-9190.....	9	28-91457.....	5	30-5198ABi.....	44

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
30-5198ABW	44	30-9421	42	32-1324	44, 49	39-100	57
30-5298ABi.....	44	30-9422	42	32-1324W	44, 49	40-7009MK.....	26
30-5298ABW	44	30-9423	42	32-1414	35	40-7009SK	26
30-5620.....	43	30-9429	42	32-1434	35	40-7015MK.....	26
30-5624.....	43	30-9506-29.....	32	32-1454	35	40-7015SK	26
30-5648.....	43	30-9506-77.....	33	32-2034	44	40-7025MK.....	26
30-5648-12.....	43	30-9506-88.....	31	32-2034W	44	40-7025SK	26
30-5696.....	43	30-9506-99.....	33	32-2036	44	40-8110	28
30-5760.....	43	30-9506CC	31	32-2036W	44	40-8114	28
30-5765.....	43	30-9506MC	31	32-2038	44	40-8116	28
30-6PP15.....	35	30-9506MF	31	32-2038W	44	40-8120	28
30-6PP25.....	35	30-9506MM	31	32-2044	44	40-8126	28
30-6PP7.....	35	30-9510-29.....	32	32-2044W	44	40-8134	28
30-7207.....	51	30-9510-77.....	33	32-2058K	44	40-8140	28
30-7422AB	43	30-9510-88.....	31	32-2098UL	40	40-8150	28
30-7424AB	43	30-9510-99.....	33	32-2198UL	40	40-8309M	28
30-7448AB	43	30-9510CC	31	32-2234	44	40-8309S	28
30-7511.....	42	30-9510MC	31	32-2234W	44	40-8315M	28
30-7512.....	42	30-9510MF	31	32-2900BK	40	40-8325M	28
30-7513.....	42	30-9510MM	31	32-2900BU	40	40-8325S	28
30-7514.....	42	30-9516	32	32-2900GN	40	40-8425M	28
30-7515.....	42	30-9520	32	32-2900GY	40	40-9415HDM	26
30-7516.....	42	30-9521	32	32-2900RE	40	40-9415HDS	26
30-7517.....	42	30-9525MC	31	32-2900WH	40	40-9427T	27, 53
30-7518.....	42	30-9525MF	31	32-2900YE	40	40-9428F	27
30-7711.....	42	30-9525MM	31	32-5001	41	40-9428M	27
30-7712.....	42	30-9530	32	32-5002	41	40-9509M	28
30-7713.....	42	30-9531	32	32-5003	41	40-9509S	28
30-7714.....	42	30-9532	32	32-5910UL	40	40-9515HDM	28
30-7715.....	42	30-9533	32	32-5954UL	40	40-9515HDS	28
30-7716.....	42	30-9534	32	32-5956UL	40	40-9515M	28
30-7717.....	42	30-9535	32	32-5958UL	40	40-9515S	28
30-7718.....	42	30-9537	32	32-5964UL	40	40-9525M	28
30-7719.....	42	30-9538	32	32-5994UL	40	40-9525S	28
30-8412AB	43	30-9575-2	31	32-5996UL	40	40-9526HDM	28
30-8PP7.....	35	30-9585-2	31	32-5998EUL	40	40-9526HDS	28
30-9201.....	42	30-9585-4	31	32-5998UL	40	40-9528F	29
30-9201BU	42	32-1004	41	32-6000M	41	40-9528M	29
30-9201IV	42	32-1004W	41	32-6001C	41	40-9531	27
30-9201RE	42	32-1006	41	32-6198UL	40	40-9533	27
30-9201WH	42	32-1014	41	32-6PP15	35	40-9535	27
30-9209.....	42	32-1014W	41	32-6PP25	35	40-9536F	29
30-9210.....	42	32-1016	41	32-6PP7	35	40-9536M	29
30-9211.....	42	32-1016W	41	33-7720	42	40-9538F	29
30-9212.....	42	32-1018	41	37-004	58	40-9538M	29
30-9213.....	42	32-1018W	41	37-006	58	40-95441M	27
30-9213W.....	42	32-1044	41	37-301	58	40-9558F	29
30-9223.....	42	32-1204	44	37-3516K	58	40-9558M	29
30-9240.....	42	32-1204W	44	38-305	58	40-9578M	29
30-9242.....	41	32-1205	44	38-313	58	40-9586F	29
30-9344B.....	41, 42	32-1205W	44	38-381	58	40-9586M	29
30-9344G.....	41, 42	32-1214	44	38-382	58	40-9588F	29
30-9344I.....	41, 42	32-1214W	44	38-383	58	40-9588M	29
30-9344W.....	41, 42	32-1224	44	38-384	58	40-9709H	29
30-9420.....	42	32-1224W	44	38-386	58	40-9709HG	26

Product Index

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
40-9709HM	29	40-9925S.....	26	65-3010	32	73-6220FF-yyy.....	37
40-9709HMG.....	26	44-250	24	65-3015	32	73-6220MF-yyy.....	37
40-9709HS	29	44-280	24	65-403P	32	73-6220MM-yyy.....	37
40-9709HX	29	44-A3F	24	65-9580	40	73-6230FF-yyy.....	37
40-9709M	28	44-A3M	24	65-9581	40	73-6230MF-yyy.....	37
40-9709S.....	28	44-D3F	24	65-9582	40	73-6230MM-yyy.....	37
40-9715H	29	44-D3M	24	65-9583	40	73-6300-yyy.....	36
40-9715HG.....	26	46-400	57	65-9584	40	73-6310-yyy.....	36
40-9715HM	29	46-502	57	65-9585	40	73-6311-yyy.....	36
40-9715HMG.....	26	6012BBP	35	65-9586	40	73-6312-yyy.....	36
40-9715HS	29	601FFP	35	65-9587	40	73-6313-yyy.....	36
40-9715HX	29	601FFPB	35	65-9588	40	73-6314-yyy.....	36
40-9715M	28	6025BBP	35	65-9589	40	73-6340-yyy.....	36
40-9715S.....	28	602FFP	35	65-9680	40	73-6351-yyy.....	36
40-9725H	29	6035BBP	35	65-9681	40	73-6352-yyy.....	36
40-9725HG.....	26	603BBP	35	65-9682	40	73-6353-yyy.....	36
40-9725HM	29	603DMGP	33	65-9683	40	73-6354-yyy.....	36
40-9725HMG.....	26	603DUGP	33	65-9684	40	73-6360-10.....	30
40-9725HS	29	603FFBBU	35	65-9685	40	73-6360-6.....	30
40-9725HX	29	603FFP	35	65-9686	40	73-6361-yyy.....	36
40-9725M	28	603FFPB	35	65-9687	40	73-6362-yyy.....	36
40-9725S.....	28	603QQGP	35	65-9688	40	73-6363-yyy.....	36
40-9737H	29	603RRGP	33	65-9689	40	73-6364-yyy.....	36
40-9737M	28	6065BBP	35	65-TF224M	40	73-6500-yyy.....	37
40-9737S.....	28	606BBP	35	65-TF226M	40	73-6510-yyy.....	37
40-9750H	29	606DMGP	33	65-TF228M	40	73-6930-yyy.....	37
40-9750M	28	606DUGP	33	65-TF254C	40	73-6940-yyy.....	37
40-9750S.....	28	606FFP	35	65-TF256C	40	73-7410-yyy.....	36
40-9809M	26	606FFPB	35	65-TF258C	40	73-7411-yyy.....	36
40-9809S.....	26	606QQGP	35	65-TF264M	40	73-7412-yyy.....	36
40-9815M	26	606RRGP	33	65-TF266M	40	73-7413-yyy.....	36
40-9815S.....	26	6100FFP	35	65-TF268M	40	73-7414-yyy.....	36
40-9825M	26	6100FFPB	35	666FFPB	35	73-777x-yyy.....	39
40-9825S.....	26	612BBP	35	6-6FFP	35	73-779x-yyy.....	39
40-98440F.....	27	612DMGP	33	6-6FFPB	35	73-889x-yyy.....	39
40-98440F-C	27	612DUGP	33	6706P	33	74-778x-yyy.....	37
40-98440M.....	27	612FFGP	35	6712P	33	74-888x-yyy.....	37
40-98440M-C.....	27	612FFP	35	6725P	33	9201C	57
40-98441M-C.....	27	6-12FFP	35	675BBP	35	9201M	57
40-98442F.....	27	612FFPB	35	675FFP	35	9203C	57
40-98442F-C	27	6-12FFPB	35	675FFPB	35	9203M	57
40-98443N	27	612QQGP	35	6803P	33	9204C	57
40-98443N-C.....	27	615FFGP	35	6806P	33	9204M	57
40-9844T.....	27	615FFPB	35	6812P	33	9205C	57
40-9844T-C.....	27	625BBP	35	6825P	33	9205M	57
40-9854M	27	625FFP	35	6SVHS-10P	36	9206C	57
40-9856M	27	6-25FFP	35	6SVHS-15P	36	9206D	57
40-9864S.....	27	625FFPB	35	6SVHS-25P	36	9207C	57
40-9865	27, 53	6-25FFPB	35	6SVHS-50P	36	9207M	57
40-9866S.....	27	6-3FFP	35	6SVHS-6P	36	9208C	57
40-9909M	26	6-3FFPB	35	70-2081	18	9209C	57
40-9909S.....	26	650BBP	35	70-2081-NW.....	18	9209D	57
40-9915M	26	650FFP	35	73-6210FF-yyy.....	37	99-328P	55
40-9915S.....	26	650FFPB	35	73-6210MF-yyy.....	37	99-418	51
40-9925M	26	65-3006	32	73-6210MM-yyy.....	37	99-419	51

Part No.	Page	Part No.	Page	Part No.	Page	Part No.	Page
99-7731B.....	56	CPAD356.....	14	CPMC6810	7	VS6WDSV	47
99-7732B.....	56	CPAD500.....	10, 13	CPMC6818	7	VS8WDS.....	47
99-7733B.....	56	CPAD501.....	10	CPMC682	7	VS8WDSV	47
99-7734.....	56	CPAD502.....	10	CPMC6820	7	VSA601C	47
99-7735.....	56	CPAD503.....	10	CPMC683	7	VSA601CPI	47
99-7736.....	56	CPAD505.....	10	CPMC6833	7	VSA604C	47
99-7737.....	56	CPAD506.....	10	CPMC6834	7	VSA604CPI	47
99-7738.....	56	CPAD507.....	10, 15	CPMC6835	7	VSA608C	47
99-7739.....	56	CPAD508.....	10, 15	CPMC6836	7	VSA608CPI	47
99-8622.....	65	CPAD509.....	10, 12	CPMC6845	7	VSCST-1B.....	56
99-8644.....	27, 53, 55	CPAD510.....	10	CPMC685	7	VSDDT10.....	46
99-8789P.....	55	CPAD511.....	10	CPMC6850	7	VSDDT14.....	46
99-8856P.....	55	CPAD512.....	10	CPMC7810	5	VSDDT18.....	46
99-8857P.....	55	CPAD515.....	10	CPMC7818	5	VSDDT4.....	46
99-8858P.....	55	CPAD555.....	10	CPMC782	5	VSDDT6.....	46
99-8859P.....	55	CPAD557.....	6	CPMC7820	5	VSDDT8.....	46
99-9858P.....	55	CPAD800.....	11	CPMC783	5	VSDDT9.....	46
99-9859P.....	55	CPAD801.....	11	CPMC785	5	VSDPDCW10.....	46
99-9912P.....	55	CPAD806.....	10, 11	CPMC881	9	VSDPDCW14.....	46
99-9958P.....	55	CPAD807.....	10, 11	CPMC8810	9	VSDPDCW18.....	46
99-9959P.....	55	CPAD808.....	11, 13	CPMC8811	9	VSDPDCW4.....	46
99-9960.....	54	CPAD809.....	11	CPMC8813	9	VSDPDCW6.....	46
99-9960F.....	54	CPAD810.....	11, 15	CPMC8817	9	VSDPDCW8.....	46
99-DC-5.....	54	CPAD811.....	11, 19	CPMC8818	9	VSDPDCW9.....	46
99-FRAME-9.....	55	CPAD851.....	11	CPMC8819	9	VSGB1-2G.....	49
99-N-8.....	54	CPF111/5	17	CPMC882	9	VSGB2-2G.....	49
99-U-8.....	54	CPF11ALM	17	CPMC8826	9	VSMA601C.....	47
CP1094U.....	9	CPF56ALM	16	CPMC883	9	VSMA602C.....	47
CP7810.....	6	CPF56ALMW.....	16	CPMC885	9	VSMA604C.....	47
CP782.....	6	CPF56ALS	16	CPN1.....	11	VSMA608C.....	47
CP785.....	6	CPF56ALX	16	CPN17	11	VSMA611C.....	47
CP881.....	9	CPF591/2	17	CPN2.....	11	VSPSREP12.....	47
CP8810.....	9	CPF591/4	17	CPN8.....	11	VSPSREP16.....	47
CP882.....	9	CPF59A	17	CPN8/110	11		
CP884.....	9	CPF59ALM	17	FLN10G	19, 48		
CP885.....	9	CPF59ALX	17	FLN12G	19, 48		
CP88T75.....	8	CPF61SE	18	FLN16G	19, 48		
CP891.....	9	CPF61SR	18	FLN1G	19, 48		
CP892.....	9	CPF81.....	18	FLN20G	19, 48		
CPAD103.....	19, 24	CPF81L.....	18	FLN2G	19, 48		
CPAD204.....	13	CPF81NW	18	FLN3G	19, 48		
CPAD206.....	13	CPFI56	16	FLN6G	19, 48		
CPAD207.....	13	CPFIUG782.....	6	FLN8G	19, 48		
CPAD210.....	13	CPFIUG785.....	6	MiniUHF1	12		
CPAD214.....	12, 13	CPFIUG792.....	6	MiniUHF17	12		
CPAD218.....	13, 19	CPFIUG881.....	8	MINIUHF2.....	12		
CPAD219.....	12, 13	CPFIUG8810.....	8	VS2WDS.....	47		
CPAD240.....	12	CPFIUG882.....	8	VS2WDSV	47		
CPAD243.....	12	CPFIUG884.....	8	VS3WBDS	47		
CPAD250.....	13	CPFIUG885.....	8	VS3WBDSV.....	47		
CPAD300.....	10, 14	CPFIUG892.....	8	VS3WDS	47		
CPAD302.....	12, 14	CPFNW.....	18	VS3WDSV	47		
CPAD305.....	12, 14	CPL2591	13	VS4WDS	47		
CPAD306.....	14	CPL2592	13	VS4WDSV	47		
CPAD355.....	14	CPL2598	13	VS6WDS	47		

Manufacturer Cross Reference


AIM	Cambridge	Page	AIM	Cambridge	Page	AIM	Cambridge	Page
25-2200.....CPAD151.....	19		26-8016.....CPAD809.....	11		28-74307.....CPAD755.....		6
25-2203.....CPAD153.....	19		26-8017.....CPAD807.....	10, 11		28-81507.....CPAD703.....		6
25-7010.....CPF591/4.....	17		26-8018.....CPAD806.....	10, 11		28-84707.....CPAD557.....		6
25-7020.....CPF591/2.....	17		26-8020.....CPAD811.....	11		28-90007.....CP782.....		6
25-7030.....CPF59ALM.....	17		26-8028.....CPN1.....	11		28-90027.....CP785.....		6
25-7031.....CPF59ALX.....	17		26-8029.....CPN2.....	11		28-90097.....CP7810.....		6
25-7032.....CPF56ALM.....	16		26-8031.....CPN17.....	11		28-90507.....CPFIUG782.....		6
25-7033.....CPF56ALX.....	16		26-8033.....CPN8/110.....	11		28-90527.....CPFIUG785.....		6
25-7034.....CPF56ALS.....	16		27-7420.....CPAD512.....	10		28-90537.....CPFIUG792.....		6
25-7036.....CPF56ALMZ.....	16		27-8100.....CPAD502.....	10		28-91007.....CPMC782.....		5
25-7049.....CPF59D.....	17		27-8110.....CPAD501.....	10		28-91027.....CPMC785.....		5
25-7050.....CPF59A.....	17		27-8120.....CPAD500.....	10, 13		28-91037.....CPMC7810.....		5
25-7056.....CPF56ALMWP.....	16		27-8130.....CPAD511.....	10		28-91047.....CPMC783.....		5
25-7066.....CPF56WPG.....	16		27-8140.....CPAD505.....	10		28-91057.....CPMC7818.....		5
25-7100.....CPF59T.....	17		27-8141.....CPAD506.....	10		28-92417.....CPMC7820.....		5
25-7120.....CPFI59.....	17		27-8142.....CPAD510.....	10		29-3835.....CPAD507.....	10, 15	
25-7121.....CPFI59.....	17		27-8150.....CPAD503.....	10		29-3840.....CPAD810.....		15
25-7140.....CPAD100.....	19		27-8200.....CPAD212.....	13, 19		29-3855.....CPAD508.....	10, 15	
25-7141.....CPAD101.....	19		27-8250.....CPAD300.....	10, 14		29-4010.....MINIUHF1.....		12
25-7150.....CPCR561/4.....	16		27-8460.....CP1094U.....	8		29-4031.....MINIUHF2.....		12
25-7180.....CPFI56.....	16		27-8460.....CP1094UL.....	8		29-4033.....MINIUHF17.....		12
25-7190.....CPF111/5.....	17		27-8461.....CPAD520.....	8		29-4100.....CPAD305.....	12, 14	
25-7191.....CPF11ALM.....	17		27-8469.....CPAD556M.....	8		29-4105.....CPAD302.....	12, 14	
25-7200.....CPF81.....	18		27-8471.....CPAD521.....	8		29-4110.....CPAD240.....		12
25-7200L.....CPF81L.....	18		27-9000.....CP882.....	9		29-4130.....CPAD243.....		12
25-7210.....CPF81NW.....	18		27-9001.....CP881.....	9		29-4140.....CPAD214.....	12, 13	
25-7300.....CPAD250.....	13		27-9002.....CP885.....	9		29-4145.....CPAD219.....	12, 13	
25-7306.....CPL2598.....	13		27-9003.....CP892.....	9		29-4150.....CPAD509.....	10, 12	
25-7307.....CPL2591.....	13		27-9007.....CP88T75.....	8		N/A	CPFIUG884	8
25-7308.....CPL2592.....	13		27-9008.....CP88T50.....	8				
25-7320.....CPAD259.....	13		27-9009.....CP8810.....	9				
25-7330.....CPAD204.....	13		27-9013.....CP895.....	9				
25-7340.....CPAD205.....	13		27-9014.....CP891.....	9				
25-7350.....CPAD206.....	13		27-9022.....CPCL881.....	9				
25-7354.....CPAD210.....	13		27-9050.....CPFIUG882.....	8				
25-7430.....CPAD555.....	10		27-9051.....CPFIUG881.....	8				
25-7500.....CPAD516.....	10		27-9052.....CPFIUG885.....	8				
25-7510.....CPAD515.....	10		27-9053.....CPFIUG892.....	8				
25-7530.....CPAD103.....	19		27-9054.....CPFIUG8810.....	8				
25-7550.....CPAD218.....	13, 19		27-9067.....CPAD356.....	14				
25-7580.....CPAD106.....	19		27-9068.....CPAD306.....	14				
25-7630.....CPF61SE.....	18		27-9069.....CPAD355.....	14				
25-7640.....CPF71.....	18		27-9075.....CPAD307.....	14				
25-7651.....CPF61LR.....	18		27-9100.....CPMC882.....	9				
25-7652.....CPF61SR.....	18		27-9101.....CPMC881.....	9				
25-7680.....CPFNW.....	18		27-9102.....CPMC885.....	9				
26-8000.....CPMC8817.....	9, 11		27-9103.....CPMC8810.....	9				
26-8002.....CPAD814.....	11		27-9104.....CPMC883.....	9				
26-8005.....CPN8.....	11		27-9105.....CPMC8819.....	9				
26-8009.....CPAD800.....	11		27-9205.....CPMC8811.....	9				
26-8010.....CPAD850.....	11		27-9209.....CP884.....	9				
26-8011.....CPAD801.....	11		27-9236.....CPMC8813.....	9				
26-8012.....CPAD803.....	11		27-9254.....CPMC8818.....	9				
26-8014.....CPAD805.....	11, 13		27-9293.....CPMC8826.....	9				
26-8015.....CPAD808.....	11, 13		27-9294.....CPAD523.....	10				

Cambridge	AIM	Page	Cambridge	AIM	Page			
CP1094U	27-8460.....	8	CPAD521	27-8471.....	8	CPFNW	25-7680.....	18
CP1094UL	27-8460.....	8	CPAD523	27-9294.....	10	CPL2591.....	25-7307.....	13
CP7810.....	28-90097.....	6	CPAD555	25-7430.....	10	CPL2592.....	25-7308.....	13
CP782.....	28-90007.....	6	CPAD556M	27-8469.....	8	CPL2598.....	25-7306.....	13
CP785.....	28-90027.....	6	CPAD557	28-84707.....	6	CPMC7810.....	28-91037.....	5
CP881.....	27-9001.....	9	CPAD703	28-81507.....	6	CPMC7818.....	28-91057.....	5
CP8810.....	27-9009.....	9	CPAD755	28-74307.....	6	CPMC782.....	28-91007.....	5
CP882.....	27-9000.....	9	CPAD800	26-8009.....	11	CPMC7820.....	28-92417.....	5
CP884.....	27-9209.....	9	CPAD801	26-8011.....	11	CPMC783.....	28-91047.....	5
CP885.....	27-9002.....	9	CPAD803	26-8012.....	11	CPMC785.....	28-91027.....	5
CP88T50.....	27-9008.....	8	CPAD805	26-8014.....	11, 13	CPMC881.....	27-9101.....	9
CP88T75.....	27-9007.....	8	CPAD806	26-8018.....	10, 11	CPMC8810.....	27-9103.....	9
CP891.....	27-9014.....	9	CPAD807	26-8017.....	10, 11	CPMC8811.....	27-9205.....	9
CP892.....	27-9003.....	9	CPAD808	26-8015.....	11, 13	CPMC8813.....	27-9236.....	9
CP895.....	27-9013.....	9	CPAD809	26-8016.....	11	CPMC8817.....	26-8000.....	9, 11
CPAD100.....	25-7140.....	19	CPAD810	29-3840.....	15	CPMC8818.....	27-9254.....	9
CPAD101.....	25-7141.....	19	CPAD811	26-8020.....	11	CPMC8819.....	27-9105.....	9
CPAD103.....	25-7530.....	19	CPAD814	26-8002.....	11	CPMC882.....	27-9100.....	9
CPAD106.....	25-7580.....	19	CPAD850	26-8010.....	11	CPMC8826.....	27-9293.....	9
CPAD151.....	25-2200.....	19	CPCL881.....	27-9022.....	9	CPMC883.....	27-9104.....	9
CPAD153.....	25-2203.....	19	CPCR561/4	25-7150.....	16	CPMC885.....	27-9102.....	9
CPAD204.....	25-7330.....	13	CPF111/5.....	25-7190.....	17	CPN1	26-8028.....	11
CPAD205.....	25-7340.....	13	CPF11ALM.....	25-7191.....	17	CPN17	26-8031.....	11
CPAD206.....	25-7350.....	13	CPF56ALM.....	25-7032.....	16	CPN2	26-8029.....	11
CPAD210.....	25-7354.....	13	CPF56ALMWP	25-7056.....	16	CPN8	26-8005.....	11
CPAD212.....	27-8200.....	13, 19	CPF56ALMZ	25-7036.....	16	CPN8/110.....	26-8033.....	11
CPAD214.....	29-4140.....	12, 13	CPF56ALS	25-7034.....	16	MINIUHF1	29-4010.....	12
CPAD218.....	25-7550.....	13, 19	CPF56ALX	25-7033.....	16	MINIUHF17	29-4033.....	12
CPAD219.....	29-4145.....	12, 13	CPF56WPG	25-7066.....	16	MINIUHF2	29-4031.....	12
CPAD240.....	29-4110.....	12	CPF591/2.....	25-7020.....	17			
CPAD243.....	29-4130.....	12	CPF591/4.....	25-7010.....	17			
CPAD250.....	25-7300.....	13	CPF59A.....	25-7050.....	17			
CPAD259.....	25-7320.....	13	CPF59ALM.....	25-7030.....	17			
CPAD300.....	27-8250.....	10, 14	CPF59ALX	25-7031.....	17			
CPAD302.....	29-4105.....	12, 14	CPF59D.....	25-7049.....	17			
CPAD305.....	29-4100.....	12, 14	CPF59T.....	25-7100.....	17			
CPAD306.....	27-9068.....	14	CPF61LR.....	25-7651.....	18			
CPAD307.....	27-9075.....	14	CPF61SE.....	25-7630.....	18			
CPAD355.....	27-9069.....	14	CPF61SR.....	25-7652.....	18			
CPAD356.....	27-9067.....	14	CPF71	25-7640.....	18			
CPAD500.....	27-8120.....	10, 13	CPF81	25-7200.....	18			
CPAD501.....	27-8110.....	10	CPF81L	25-7200L.....	18			
CPAD502.....	27-8100.....	10	CPF81NW.....	25-7210.....	18			
CPAD503.....	27-8150.....	10	CPF156.....	25-7180.....	16			
CPAD505.....	27-8140.....	10	CPF159.....	25-7120.....	17			
CPAD506.....	27-8141.....	10	CPFID59	25-7121.....	17			
CPAD507.....	29-3835.....	10, 15	CPFIUG782	28-90507.....	6			
CPAD508.....	29-3855.....	10, 15	CPFIUG785	28-90527.....	6			
CPAD509.....	29-4150.....	10, 12	CPFIUG792	28-90537.....	6			
CPAD510.....	27-8142.....	10	CPFIUG881	27-9051.....	8			
CPAD511.....	27-8130.....	10	CPFIUG8810	27-9054.....	8			
CPAD512.....	27-7420.....	10	CPFIUG882	27-9050.....	8			
CPAD515.....	25-7510.....	10	CPFIUG884	N/A.....	8			
CPAD516.....	25-7500.....	10	CPFIUG885	27-9052.....	8			
CPAD520.....	27-8461.....	8	CPFIUG892	27-9053.....	8			


TERMINATION INSTRUCTIONS

IMPORTANT FOR PROPER
INSTALLATION OF CONNECTORS


TWIST-ON BNC/TNC

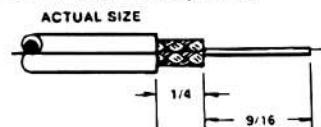


- Trim cable as shown. Taking care not to nick the center conductor or outer braid.



- Twist the outer braid in a clockwise direction in such a manner that at least 1/32 of inner dielectric is bared and the braid is left flat. (stray or loose braid can cause shorts)




- Back end of connector and inner dielectric flush. center conductor is now in place.




- Firmly push the cable home as far as possible, then screw the connector on the cable in a clockwise direction until it stops.


TWO-PIECE CRIMP BNC/TNC

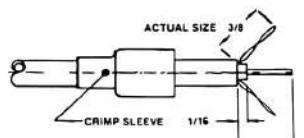

- Run crimp sleeve down cable.
- Trim cables as shown, taking care not to nick outer braid.
- Insert center conductor into the guide hole in the rear of the connector. Then screw the connector on the cable in a clockwise direction



CABLE HOMED



CRIMPED SLEEVE


- Push crimp sleeve into place, sandwiching the braid between the connector and sleeve.

- Crimp the sleeve into place with the proper crimp tool.


THREE-PIECE CRIMP BNC/TNC



- Trim cable as shown. Taking care not to nick the inner conductor or braid.

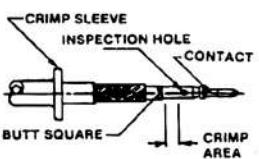

- Slip crimp sleeve over cable. Place inner conductor into contact. Note that the end of contact and inner dielectric must be butting and square. Crimp with appropriate tooling.



- Flair outer braid and gently but firmly push the contact into the connector housing until a gentle snap is felt, indicating the contact is in place. Slip the crimp sleeve in place, butting the flange against the connector body and crimp with appropriate tooling.

MINI BNC THREE-PIECE CRIMP




- Slip support sleeve over cable, and trim jacket as shown, taking care not to nick the shielding braid.



- Flair braid and lay it in position over the sleeve as shown. Trim away the inner dielectric taking care not to nick the center conductor.




- Place the bushing and contact in place on the cable and keeping the assembly snugly in place, crimp the contact with appropriate tooling.




- Gently but firmly push the contact into the connector housing until a gentle snap is felt, indicating the contact is in place, crimp the connector together with appropriate tooling.

USED ON 27-9241, 27-9296, 27-9270, 27-9105


N-TWIST-ON



- Trim cable as shown, taking care not to nick the center conductor or outer braid. Make sure that the outer braid lays flat. Trim any loose braid which can cause shorts.




- Contact & dielectric must be flush
- Twist the contact in a clockwise direction on the inner conductor till the back end of the contact is flush with the inner dielectric.




- Twist the connector onto the cable in a clockwise direction. The connector is properly installed when the end of the contact is positioned within 1/32" of the front edge of the connector.

*To aid in twisting on contact insert paper clip in thru hole.


N-SOLDER CLAMP

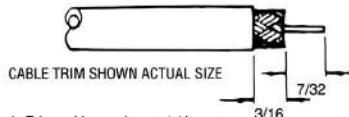

- Trim cable as shown, taking care not to nick the center conductor or outer braid.

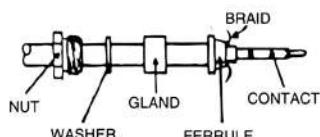

- Run nut, washer, gland and ferrule over the cable, and flair the braid over the ferrule. Solder or crimp the contact to the center conductor.



- Push the center contact home into the body assy., feeling it snap into place, and with all the loose components in place complete the assembly by wrench tightening the nut.

USED ON 26-8000, 26-8001, 26-8002, 26-8025, 26-8026, 26-8027



Cinch Connectivity Solutions North America Office

T +1 507.833.8822
ccsorders@us.cinch.com

Cinch Connectivity Solutions Ltd European Office

T +44 (0) 1245 342060
CinchConnectivity@eu.cinch.com

Cinch Connectivity Solutions Asia Pacific Office

T +86 21 5442 7668
ccs.asia.sales@as.cinch.com

Innovative Interconnect Solutions Across the Globe

In operation since 1917, Cinch supplies high quality, high performance connectors and cables globally to the Aerospace, Military/Defense, Commercial Transportation, Oil & Gas, High End Computer, and other markets. We provide custom solutions with our creative, hands on engineering and end to end approach.

Our diverse product offerings include: connectors, enclosures and cable assemblies utilizing multiple contact technologies including copper and fiber optics. Our product engineering and development activities employ cutting edge technologies for design and modeling, and our various technologies and expertise enable us to deliver custom solutions and products for our strategic partnerships. We also serve a broad range of commercial markets, largely through our highly efficient distribution network.

We aim to exceed our customer's expectations, and to continually provide innovative solutions to the rapidly changing needs of the markets, and customers, we serve. For more information, visit cinch.com



cinch
CONNECTIVITY SOLUTIONS
a bel group

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Extraction, Removal & Insertion Tools category:

Click to view products by Bel Fuse manufacturer:

Other Similar products are found below :

[M8196914-08](#) [768211-2](#) [809-131](#) [844751-2](#) [8-59558-2](#) [91018-1](#) [12014013](#) [12093647](#) [1-21048-0](#) [R282867020](#) [12093078](#) [1-21048-6](#)
[12121897](#) [DCF.91.405.5LT](#) [1322](#) [15314260](#) [15350698](#) [15350707](#) [15430130](#) [1579018-4](#) [1643916-1](#) [1-679532-0](#) [1976593-3](#) [OUTEXT-0321](#)
[2-1579008-3](#) [2-1579008-4](#) [229694-7](#) [231106-1](#) [241469](#) [91040-3](#) [91040-7](#) [965004-000](#) [965069-000](#) [1738219-1](#) [ET-JL05-16](#) [FG 0300 146](#)
[3000](#) [FIT-6](#) [210S048](#) [2-1579007-9](#) [231879-1](#) [312138-3](#) [RJ11FODE](#) [356-162](#) [M8196914-10](#) [4-1579018-0](#) [430395-001](#) [483249-1](#) [5-](#)
[1579007-2](#) [5-1579007-9](#) [BPR10](#)