



SERIES: F1C2-0606 | DESCRIPTION: HIGH POWER SHIELDED SMD INDUCTORS

FEATURES

- Magnetically shielded construction
- Unique metal dust core providing improved Isat
- Low DCR resulting in lower power losses



MODEL	Inductance (L0)	Tolerance	DC Resistance (DCR)	Saturation Current (Isat)		Temperature Rise Current (Irms)		E
	[μH]	[± %]	max [mΩ]	max [A]	typ [A]	max [A]	typ [A]	[± 0.3 mm]
F1C2-060603W-R18M	0.18	20	1.75	36.0	40.0	24.0	32.0	5.30
F1C2-060603W-R33M	0.33	20	2.50	28.0	32.0	20.0	25.0	5.55
F1C2-060603W-R56M	0.56	20	3.31	25.0	29.0	17.0	22.0	5.30
F1C2-060603W-R68M	0.68	20	5.17	21.0	25.0	15.0	20.0	5.30
F1C2-060603W-1R0M	1.00	20	6.05	18.0	22.0	13.0	18.0	5.20
F1C2-060603W-1R2M	1.20	20	7.40	16.0	21.0	12.0	16.0	5.15
F1C2-060603W-1R5M	1.50	20	9.13	13.5	17.5	11.0	15.0	5.15
F1C2-060603W-1R8M	1.80	20	10.2	13.0	16.0	10.0	14.0	5.10
F1C2-060603W-2R2M	2.20	20	12.2	11.0	15.9	7.00	10.0	5.05
F1C2-060603W-3R3M	3.30	20	20.8	9.00	12.2	6.00	8.00	5.00
F1C2-060603W-4R5M	4.50	20	25.3	8.00	10.0	5.00	7.00	5.00
F1C2-060605W-R82M	0.82	20	4.18	18.0	23.0	16.0	21.0	5.30
F1C2-060605W-1R0M	1.00	20	4.52	18.0	23.0	15.0	20.0	5.30
F1C2-060605W-1R2M	1.20	20	5.83	16.0	20.5	14.0	18.0	5.30
F1C2-060605W-1R5M	1.50	20	6.30	14.5	19.5	13.0	17.0	5.30
F1C2-060605W-1R8M	1.80	20	7.10	13.5	17.5	12.0	16.0	5.30
F1C2-060605W-2R2M	2.20	20	8.50	12.0	14.5	10.0	13.0	5.20
F1C2-060605W-3R3M	3.30	20	12.5	10.0	12.5	8.5	11.0	5.20
F1C2-060605W-4R3M	4.30	20	16.2	8.5	11.0	7.0	9.0	5.20
F1C2-060605W-4R7M	4.70	20	18.4	8.0	10.5	6.5	8.5	5.20
F1C2-060606W-1R0M	1.0	20	4.4	19.0	24.0	16.0	21.0	5.30
F1C2-060606W-1R5M	1.5	20	6.1	15.0	20.0	13.5	17.5	5.30
F1C2-060606W-2R2M	22	20	8.1	12.5	15.5	11.0	14.0	5.30
F1C2-060606W-3R3M	3.3	20	12.3	11.0	13.0	9.0	12.0	5.30
F1C2-060606W-4R7M	4.7	20	14.4	9.3	10.5	8.5	11.0	5.30
F1C2-060606W-5R6M	5.6	20	15.9	8.7	9.9	7.6	10.0	5.30
F1C2-060606W-6R8M	6.8	20	20.8	8.1	9.2	7.0	9.0	5.30
F1C2-060606W-8R2M	8.2	20	26.4	8.0	8.4	6.0	8.0	5.30
F1C2-060606W-100M	10.0	20	29.82	6.8	7.6	5.0	7.0	5.30
F1C2-060606W-150M	15.0	20	43.75	5.0	5.8	4.5	6.0	5.30
F1C2-060606W-220M	22.0	20	60.63	4.8	5.6	3.8	5.0	5.30

- Notes:
- 1. Referenced ambient temperature 25°C
 - 2. Test Condition: 100 kHz, 0.1 Vrms
 - 3. Saturation Current - Isat: DC current (A) that will cause L0 to drop approximately 30%
 - Temperature Rise Current - Irms: DC current (A) that will cause an approximate ΔT of 40°C
 - 4. Operating temperature range includes self-temperature rise
 - 5. Operating Temperature: -55°C to 125°C
 - 6. The products' temperature (ambient + temp rise) should not exceed 125 °C under the worst case operating condition.
- Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all could affect the operating temperature, which should be verified in the end application.

PART NUMBER KEY

F1C2 - 060603W - XXX X

Type / Product Series

F1C2 = High Power Shielded SMD Inductors

Form Factor

060603W
060605W
060606W

Inductance Tolerance

M = ±20%


Inductance *

R47 = 0.47 μH

* Note: Inductance expressed by three figures. The unit is micro henry (μH). The first and second figures are significant digits, the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R" (3R8 = 3.8 μH). In that case, all figures are significant digits.


MECHANICAL DRAWING

Units: mm

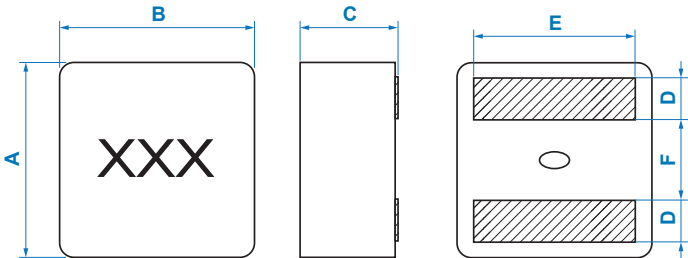












PAD LAYOUT

Units: mm




MECHANICAL DIMENSIONS (mm)									
Product Series	A	B	C	D	E	F	G	H	I
F1C2-060603W	6.40 ± 0.2	6.60 ± 0.2	3.10 max	1.40 ± 0.3	See table	2.60 ± 0.3	4.05	1.55	5.60
F1C2-060605W	6.40 ± 0.2	6.60 ± 0.2	5.00 max	1.40 ± 0.3	See table	2.60 ± 0.3	4.05	1.55	5.60
F1C2-060606W	6.40 ± 0.2	6.60 ± 0.2	6.00 max	1.40 ± 0.3	5.30 ± 0.3	2.60 ± 0.3	4.05	1.55	5.60

PERFORMANCE CURVES

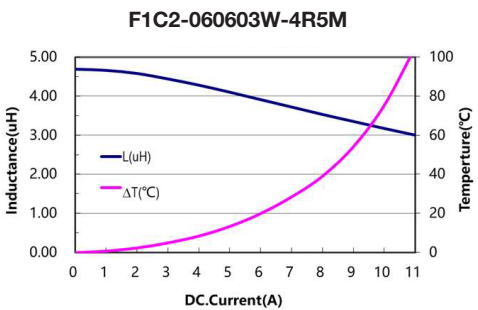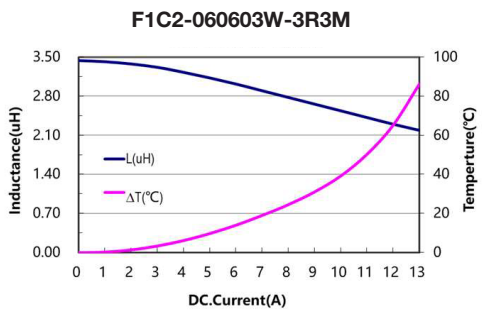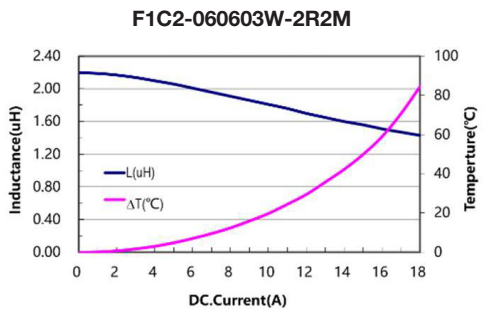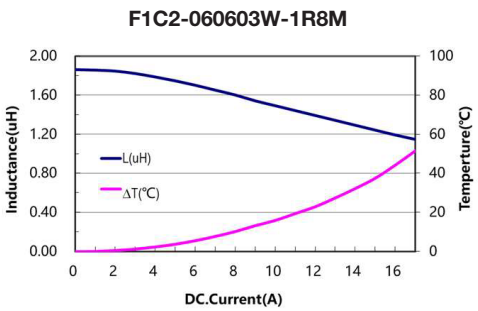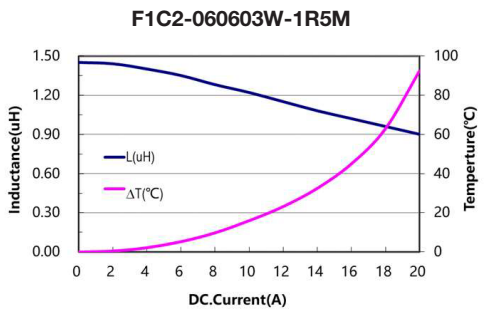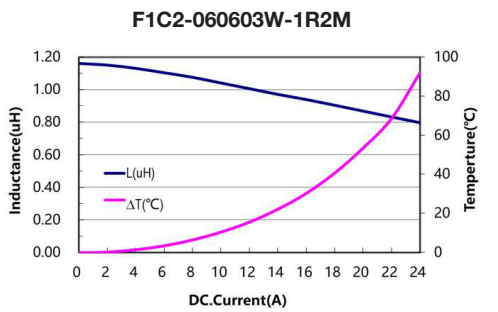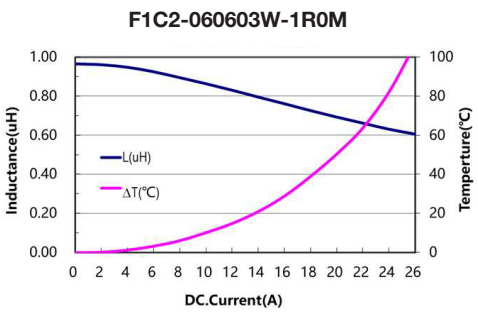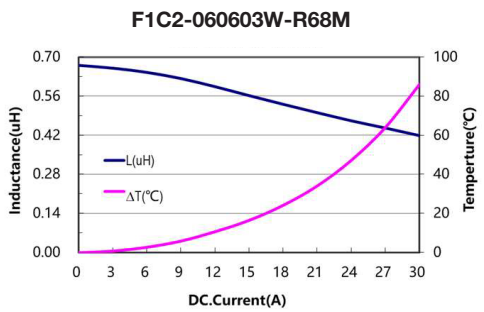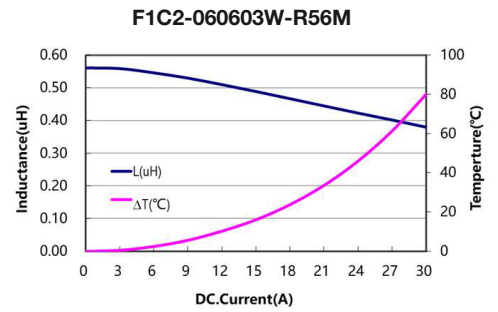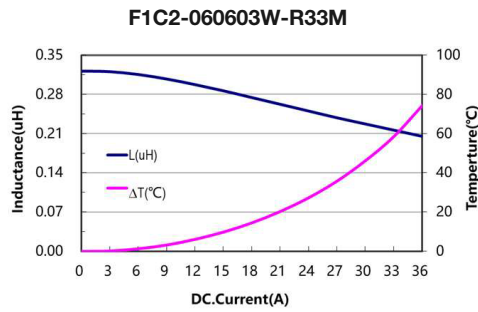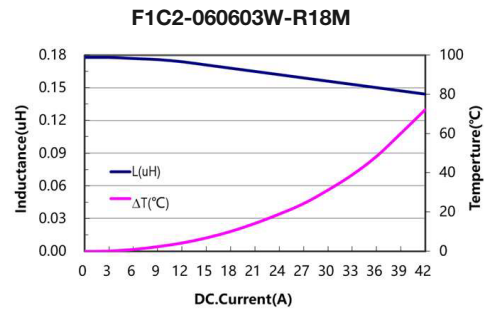


PERFORMANCE CURVES


F1C2-060605W-R82M

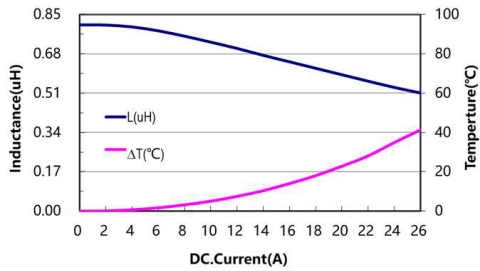


F1C2-060605W-1R0M

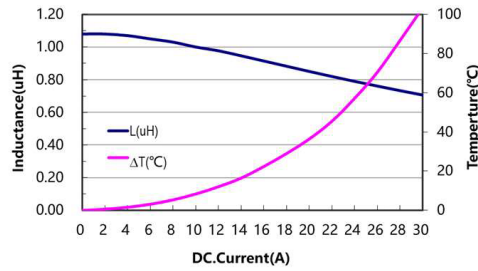


F1C2-060605W-1R2M

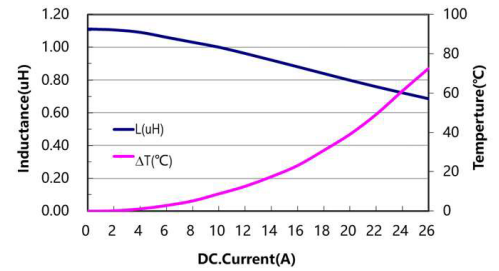


F1C2-060605W-1R5M

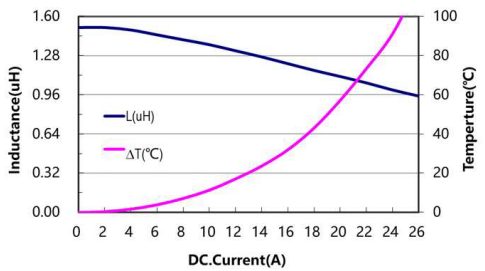


F1C2-060605W-1R8M

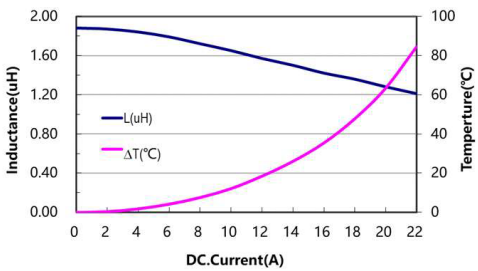


F1C2-060605W-2R2M

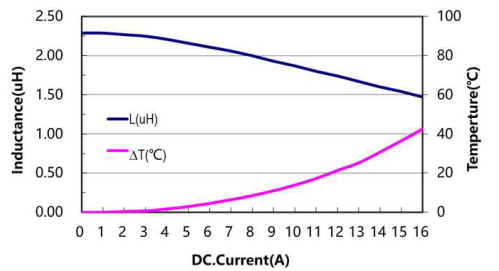


F1C2-060605W-3R3M

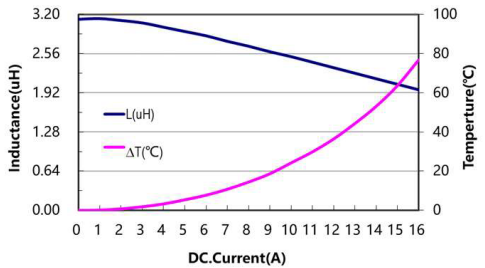


F1C2-060605W-4R3M

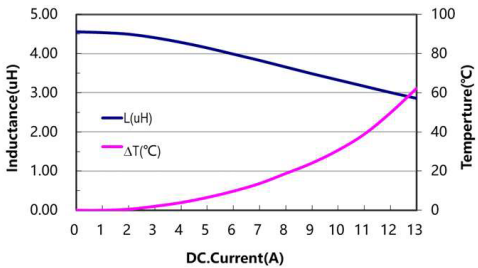


F1C2-060605W-4R7M

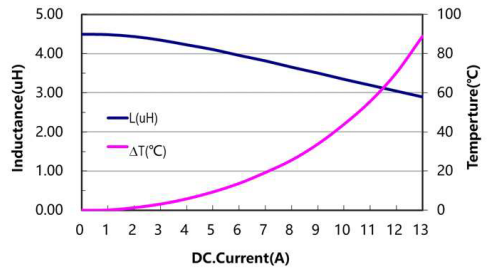

PERFORMANCE CURVES

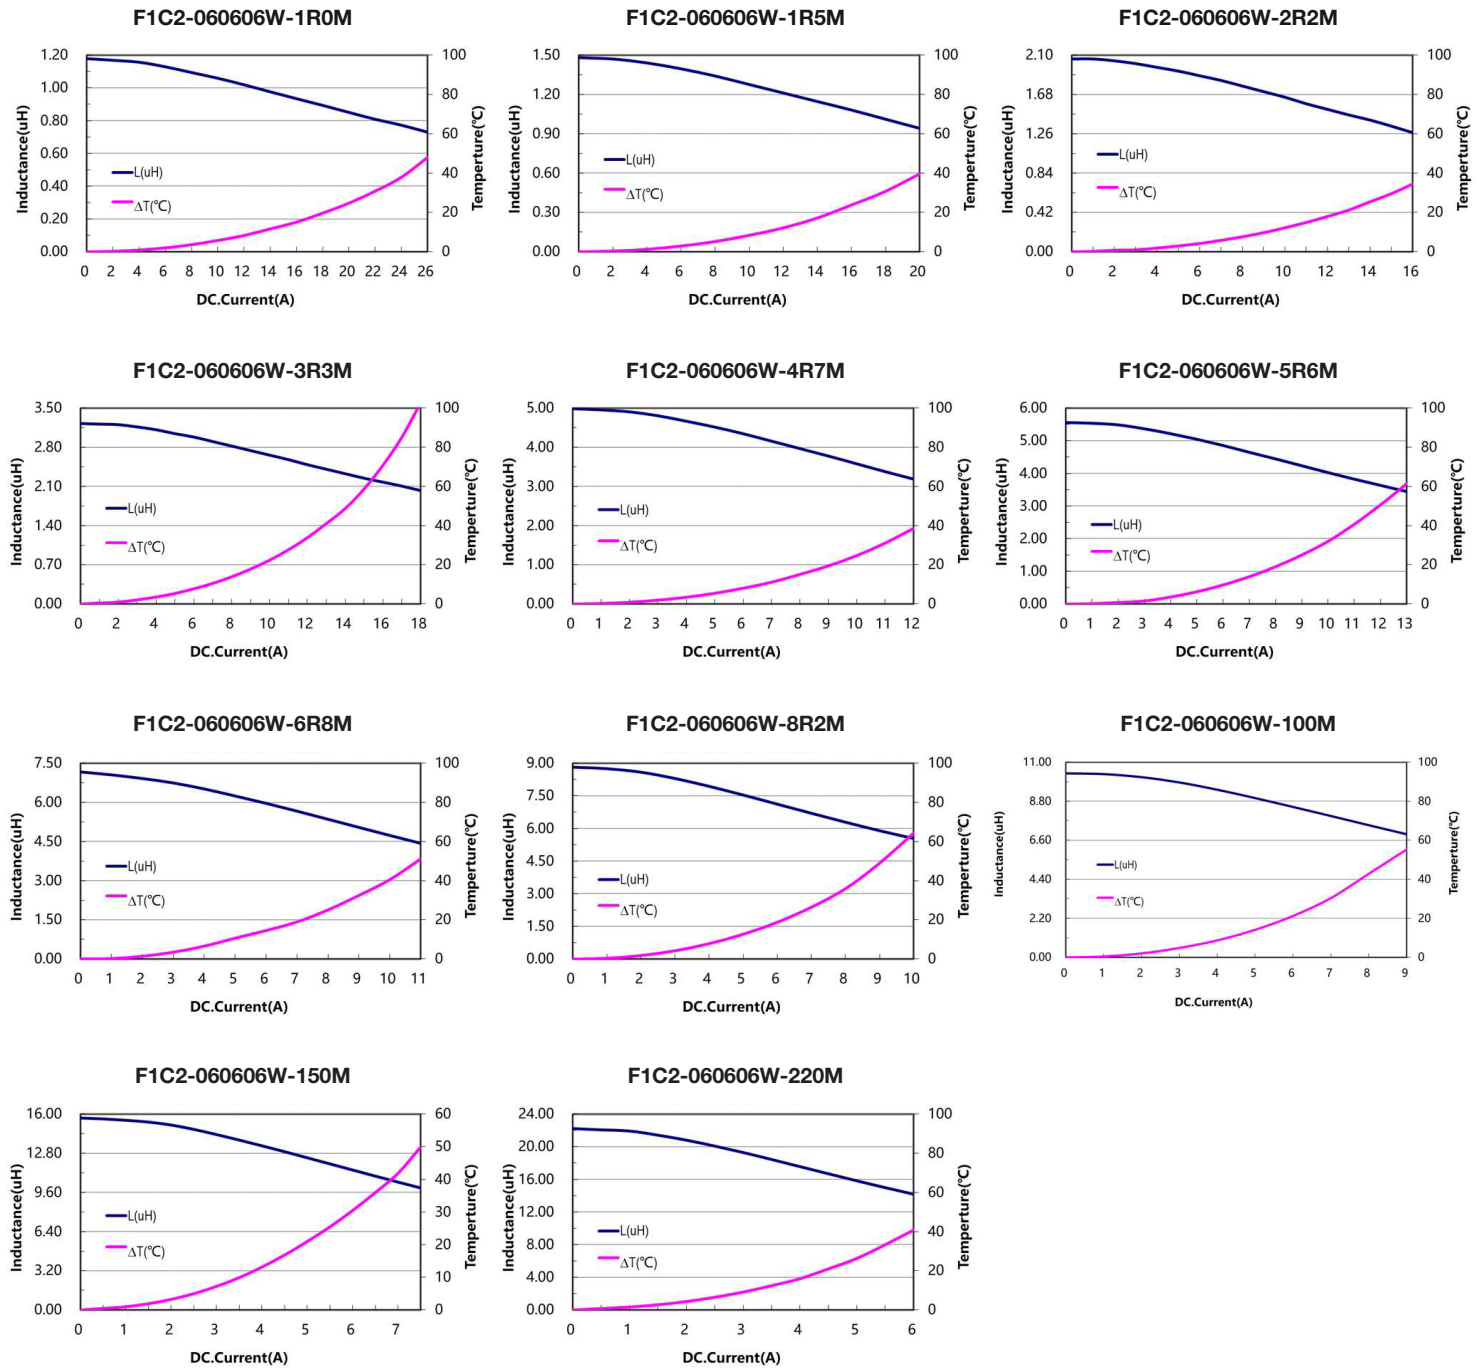


REFLOW SOLDERING TEMPERATURE CURVE

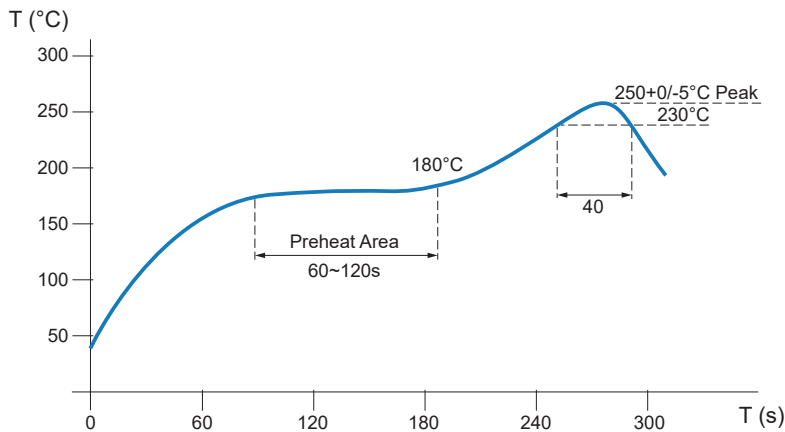

The recommended reflow conditions are set according to the soldering equipment used. Since various manufactures may have different reflow soldering equipment, products, process conditions, set methods, etc., when setting the reflow contions, please adjust and confirm according to users' environment/equipment.


QUANTITY PER REEL & PACKING INFORMATION

Units: mm

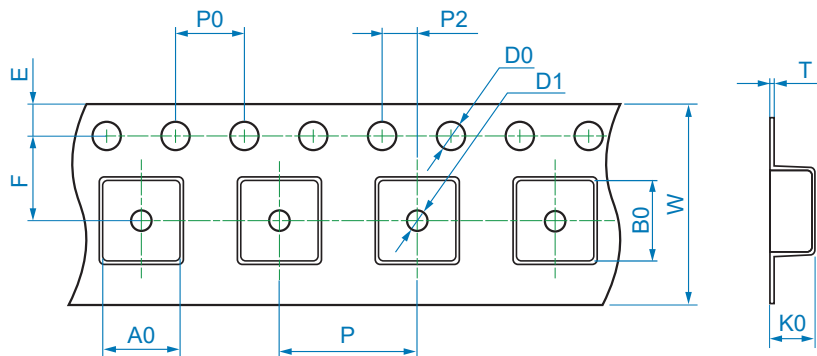

TAPE DIMENSIONS (mm)

Product Series	W	P	P0	P2	D0	D1	T	A0	B0	K0	E	F
F1C2-060603W	16 ± 0.3	12 ± 0.1	4 ± 0.1	2 ± 0.1	1.5 ± 0.1	1.5 ± 0.1	0.35 ± 0.05	7.0 ± 0.1	6.8 ± 0.1	3.3 ± 0.1	1.75 ± 0.1	7.5 ± 0.1
F1C2-060605W	16 ± 0.3	12 ± 0.1	4 ± 0.1	2 ± 0.1	1.5 ± 0.1	1.5 ± 0.1	0.35 ± 0.05	7.0 ± 0.1	6.8 ± 0.1	5.3 ± 0.1	1.75 ± 0.1	7.5 ± 0.1
F1C2-060606W	16 ± 0.3	12 ± 0.1	4 ± 0.1	2 ± 0.1	1.5 ± 0.1	1.5 ± 0.1	0.35 ± 0.05	7.0 ± 0.1	6.8 ± 0.1	6.3 ± 0.1	1.75 ± 0.1	7.5 ± 0.1

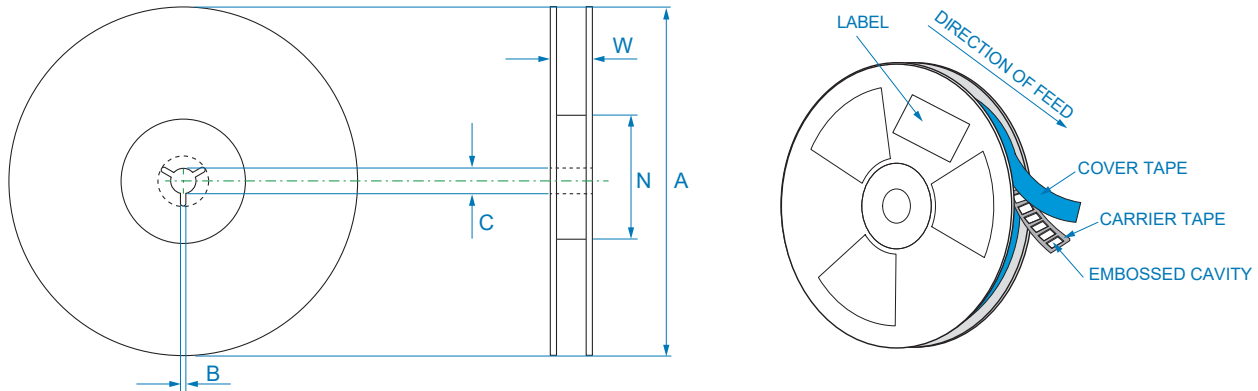
**REEL DIMENSIONS (mm)**

Product Series	A	W	N	B	C
F1C2-060603W	330 ± 2.0	16.8 ± 0.2	97 ± 0.5	2.2 ± 0.5	13.2 ± 0.2
F1C2-060605W	330 ± 2.0	16.8 ± 0.2	97 ± 0.5	2.2 ± 0.5	13.2 ± 0.2
F1C2-060606W	330 ± 2.0	16.8 ± 0.2	97 ± 0.5	2.2 ± 0.5	13.2 ± 0.2

Peel-off Force

The peel-off speed shall be about 300 mm/min.

The peel-off force of top cover tape shall be between 0.1 to 1.3 N

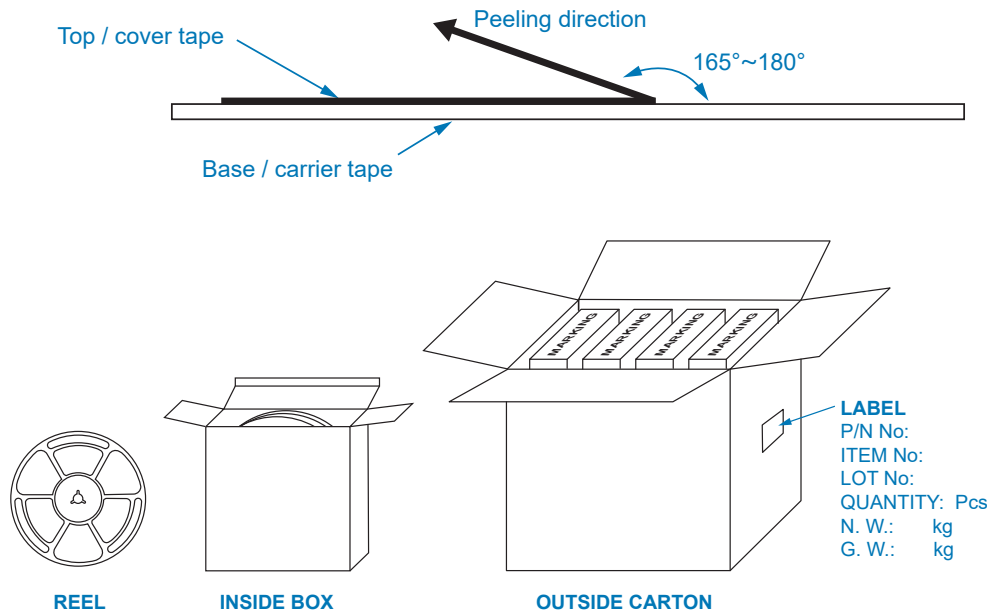**QUANTITY PER PACKAGE**

Product Series	Pcs per Reel	Pcs per Inside Box	Pcs per Outside Carton
F1C2-060603W	1000	3000	12000
F1C2-060605W	800	2400	9600
F1C2-060606W	750	2250	9000

Storage Conditions

- Temperature conditions: <35°C.
- Humidity conditions between 35% - 65%.
- Moisture Sensitivity Level (MSL): Level 1.
- Storage of material to be in a sulfur and chlorine free environment.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Inductors - SMD category:](#)

Click to view products by [Bel Fuse manufacturer:](#)

Other Similar products are found below :

[LLQPB201214T1R0M](#) [LLXND3030QKT470MNG](#) [LLQPB160807T4R7M](#) [SSL1306T-101M-N](#) [CDRH8D43RT125NP-680MC](#)
[CDRH70D45BT150NP-101MC](#) [CDRH10D68RT125NP-102PC](#) [CD43NP-1R0MC](#) [CDRH60D45BT150NP-331MC](#) [CDRH104NP-221MC](#)
[CDRH5D28RBH125NP-100MC](#) [CDRH6D38T125NP-330PC](#) [CDRH60D45BT150NP-221MC](#) [CDRR126NP-331MC](#) [CDRH60D45BT150NP-4R7NC](#) [CDRH124NP-331MC](#) [DEP1016NP-330PB](#) [CDRH6D38T125NP-3R9NC](#) [CDRH127L125NP-680MC](#) [CD43T125NP-680KC](#)
[CDRR7D45T125NP-6R8MC](#) [CDRH60D45BT150NP-100MC](#) [0630CDMCDDS-R15MC](#) [CDRCH12D78BNP-220MC](#) [CD75T125NP-471KC](#)
[CD105T125NP-101KC](#) [CDRH80D65BT150NP-102MC](#) [CD75T125NP-101KC](#) [CDRH10D60BT150NP-101MC](#) [CDRH104RT125NP-6R8PC](#)
[CD105T125NP-331KC](#) [CDRH104RT125NP-221MC](#) [CDRH40D18ANP-220NC](#) [CDRH70D45BT150NP-100MC](#) [CDRH5D28RBH125NP-101MC](#) [CDRH80D65BT150NP-471MC](#) [CDRH127L125NP-102MC](#) [WLPH201610M1R0PS](#) [78438336068HT](#) [744045470](#)
[IHLP5050CEEK3R3MA1](#) [744045680](#) [744032470](#) [74437346150](#) [7687709472](#) [7687709682](#) [7687714470](#) [7687779470](#) [SRP2512CL-1R0M](#)
[AIML-0603HC-100M-T](#)