



SERIES: F1C2-0707 | DESCRIPTION: HIGH POWER SHIELDED SMD INDUCTORS

FEATURES

- Magnetically shielded construction
- Unique metal dust core providing improved Isat
- Low DCR resulting in lower power losses



MODEL	Inductance (L0)	Tolerance	DC Resistance (DCR)	Saturation Current (Isat)		Temperature Rise Current (Irms)		E
	[μH]	[± %]	max [mΩ]	max [A]	typ [A]	max [A]	typ [A]	[± 0.3 mm]
F1C2-070702W-R27M	0.27	20	3.5	27.0	35.0	16.0	21.0	6.60
F1C2-070702W-R31M	0.31	20	4.8	26.0	34.0	14.0	20.0	6.20
F1C2-070702W-R33M	0.33	20	4.8	26.0	34.0	13.0	19.0	6.20
F1C2-070702W-R47M	0.47	20	6.2	24.0	28.0	12.0	17.0	6.20
F1C2-070702W-R68M	0.68	20	9.2	22.0	25.0	10.0	13.0	6.20
F1C2-070702W-1R0M	1.00	20	10.8	20.0	23.0	8.0	11.0	6.20
F1C2-070703W-1R0M	1.00	20	5.00	22.5	27.0	16.1	21.8	6.60
F1C2-070703W-1R5M	1.50	20	8.25	20.5	23.5	12.0	15.3	6.60
F1C2-070703W-2R2M	2.20	20	13.7	17.0	19.0	10.0	13.0	6.20
F1C2-070703W-2R7M	2.70	20	15.4	13.5	16.0	9.20	11.4	6.20
F1C2-070703W-3R3M	3.30	20	18.0	13.0	15.0	8.00	10.0	6.20
F1C2-070703W-4R7M	4.70	20	26.7	9.5	12.0	6.90	9.00	6.20
F1C2-070703W-5R6M	5.60	20	33.2	9.0	11.0	5.30	7.30	6.20
F1C2-070703W-6R8M	6.80	20	42.5	8.0	10.0	4.50	6.80	6.20
F1C2-070703W-8R2M	8.20	20	48.7	7.0	9.0	3.00	5.90	6.20
F1C2-070707W-1R0M	1.00	20	2.81	31.8	34.8	20	25.0	6.70
F1C2-070707W-1R8M	1.80	20	4.46	21.5	25.0	15.8	21.0	6.70
F1C2-070707W-3R3M	3.30	20	9.42	13.5	17.0	11.5	15.1	6.70
F1C2-070707W-4R7M	4.70	20	13.5	11.0	14.0	10.5	13.6	6.70
F1C2-070707W-6R8M	6.80	20	19.6	10.0	12.0	7.0	9.5	6.50

Notes:

1. Referenced ambient temperature 25°C
2. Test Condition: 100 kHz, 0.1 Vrms
3. Saturation Current - Isat: DC current (A) that will cause L0 to drop approximately 30%
Temperature Rise Current - Irms: DC current (A) that will cause an approximate ΔT of 40°C
4. Operating temperature range includes self-temperature rise
5. Operating Temperature: -55°C to 125°C
6. The products' temperature (ambient + temp rise) should not exceed 125 °C under the worst case operating condition.
Circuit design, component, PCB trace size and thickness, airflow and other cooling provisions all could affect the operating temperature, which should be verified in the end application.

PART NUMBER KEY

F1C2 - 070702W - XXX X

Type / Product Series
F1C2 = High Power Shielded SMD Inductors

Form Factor
070702W
070703W
070707W


Inductance Tolerance
M = ±20%

Inductance *
R47 = 0.47 µH

* Note: Inductance expressed by three figures. The unit is micro henry (µH). The first and second figures are significant digits, the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R" (3R8 = 3.8 µH). In that case, all figures are significant digits.


MECHANICAL DRAWING

Units: mm

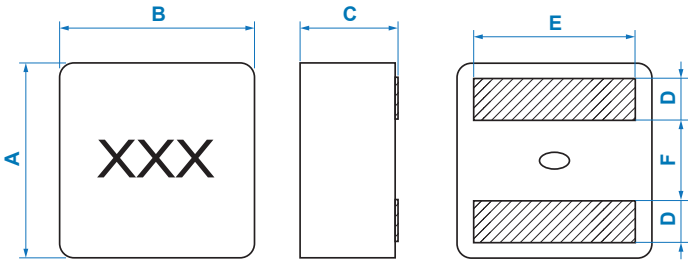

PAD LAYOUT


Units: mm




MECHANICAL DIMENSIONS (mm)

Product Series	A	B	C	D	E	F	G	H	I
F1C2-070702W	7.60 ± 0.20	7.80 ± 0.25	2.10 max	1.75 ± 0.3	See table	3.15 ± 0.3	5.10	2.30	7.20
F1C2-070703W	7.60 ± 0.20	7.80 ± 0.25	3.10 max	1.75 ± 0.3	See table	3.15 ± 0.3	5.10	2.30	7.20
F1C2-070707W	7.60 ± 0.25	7.80 ± 0.25	7.00 max	1.75 ± 0.3	See table	3.15 ± 0.3	5.30	2.50	6.70


PERFORMANCE CURVES

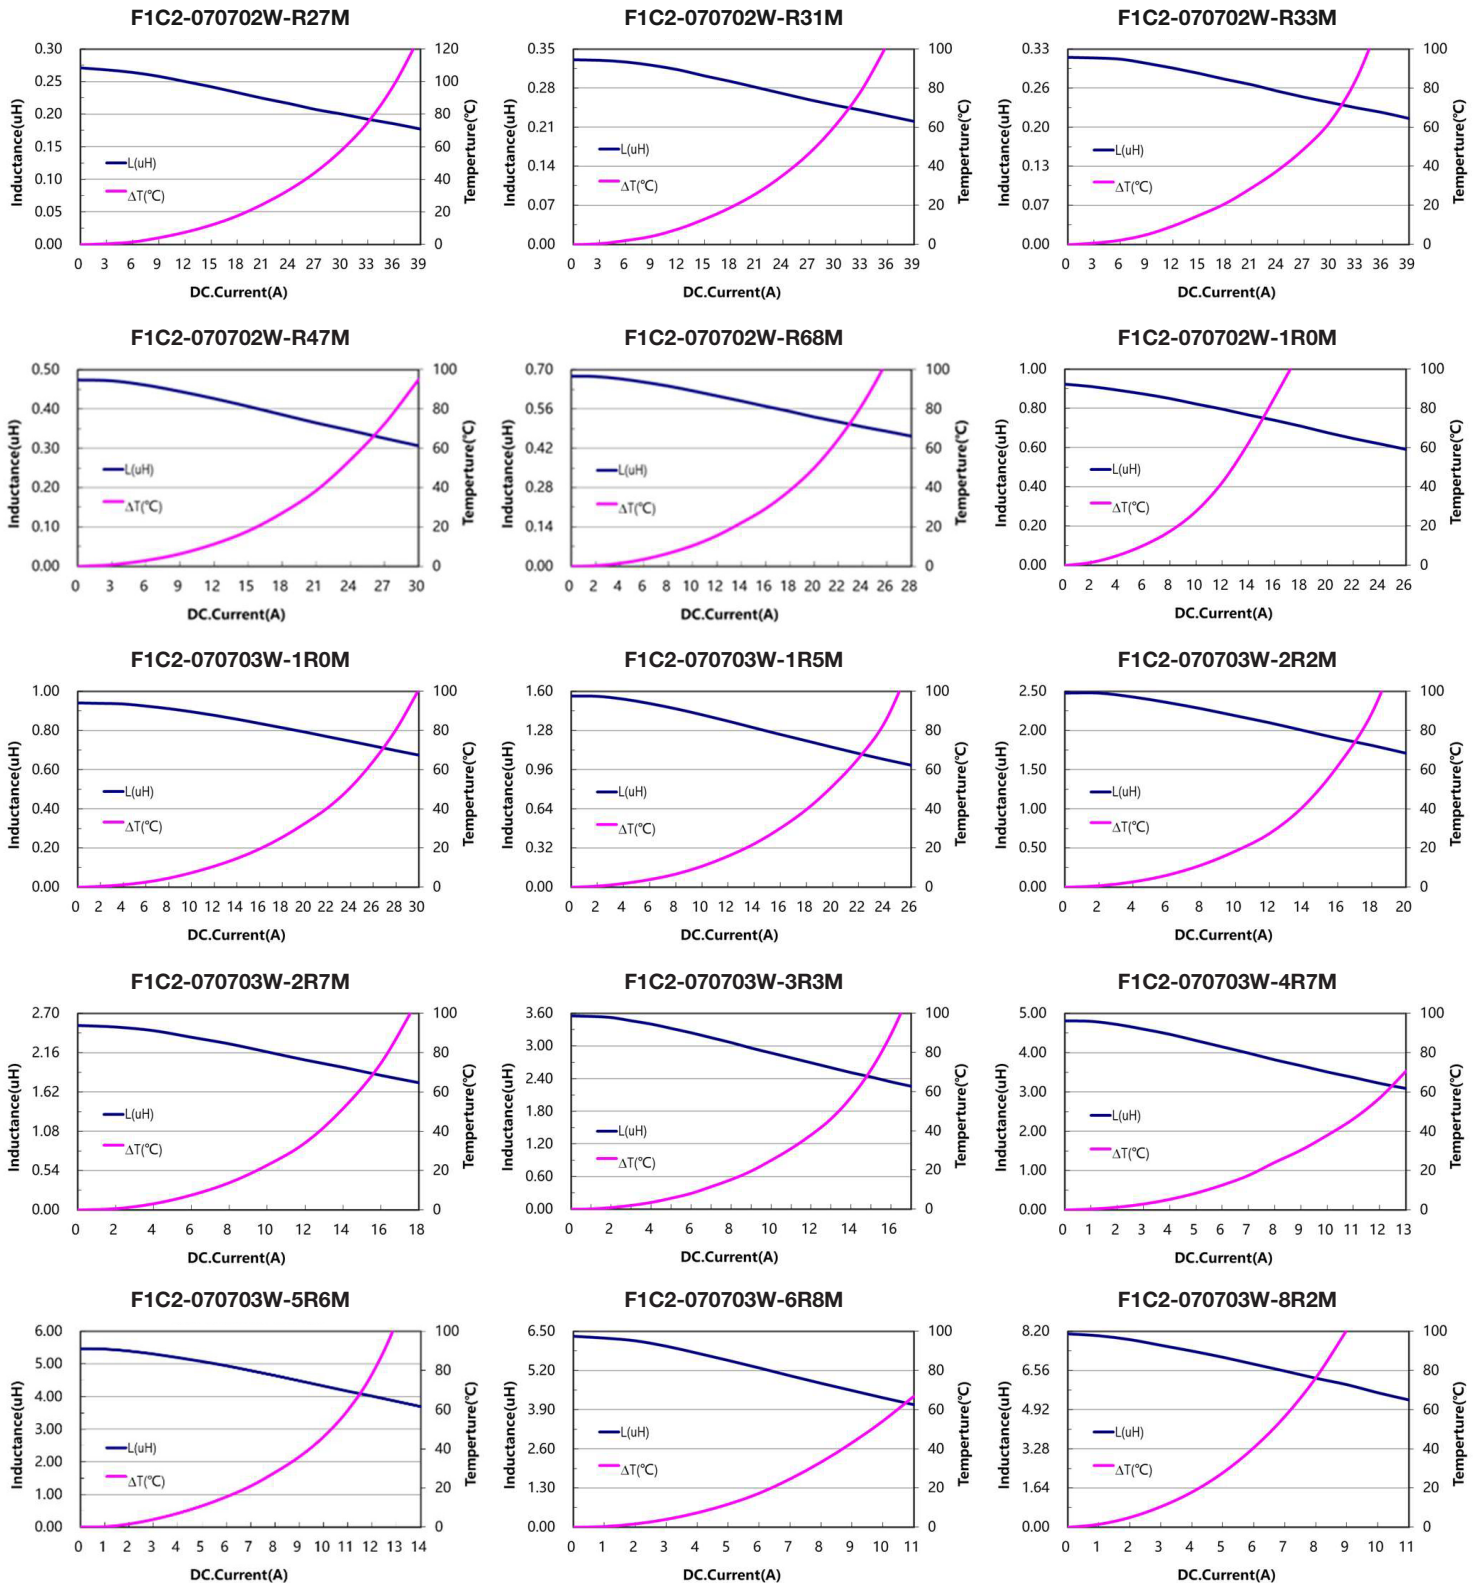

PERFORMANCE CURVES

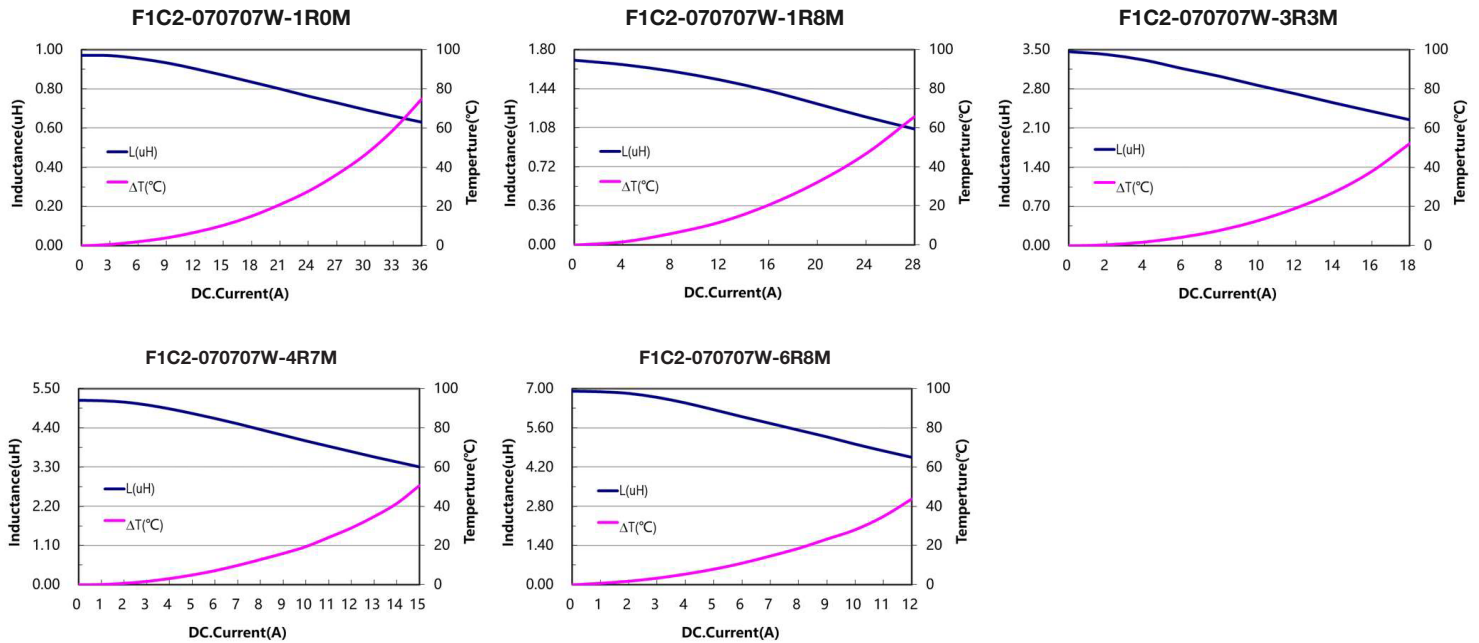

REFLOW SOLDERING TEMPERATURE CURVE

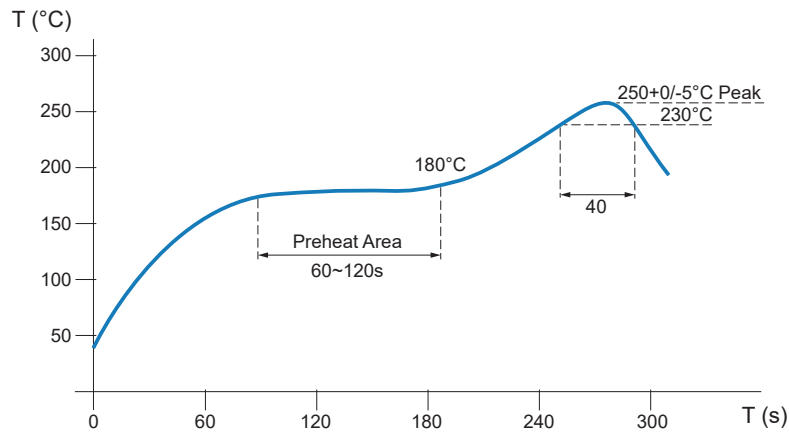


The recommended reflow conditions are set according to the soldering equipment used.

Since various manufactures may have different reflow soldering equipment, products, process conditions, set methods, etc., when setting the reflow conditions, please adjust and confirm according to users' environment/equipment.



QUANTITY PER REEL & PACKING INFORMATION

Units: mm

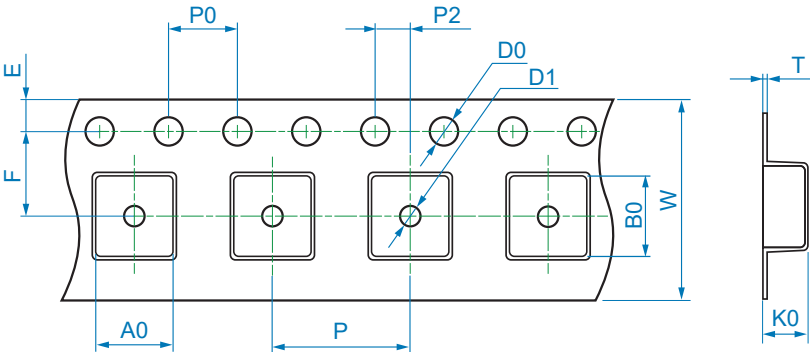

TAPE DIMENSIONS (mm)

Product Series	W	P	P0	P2	D0	D1	T	A0	B0	K0	E	F
F1C2-070702W	16 ± 0.3	12 ± 0.1	4 ± 0.1	2 ± 0.1	1.5 ± 0.1	1.5 ± 0.1	0.35 ± 0.05	8.2 ± 0.1	8.0 ± 0.1	2.3 ± 0.1	1.75 ± 0.1	7.5 ± 0.1
F1C2-070703W	16 ± 0.3	12 ± 0.1	4 ± 0.1	2 ± 0.1	1.5 ± 0.1	1.5 ± 0.1	0.35 ± 0.05	8.2 ± 0.1	8.0 ± 0.1	3.3 ± 0.1	1.75 ± 0.1	7.5 ± 0.1
F1C2-070707W	16 ± 0.3	12 ± 0.1	4 ± 0.1	2 ± 0.1	1.5 ± 0.1	1.5 ± 0.1	0.35 ± 0.05	8.2 ± 0.1	8.0 ± 0.1	7.3 ± 0.1	1.75 ± 0.1	7.5 ± 0.1

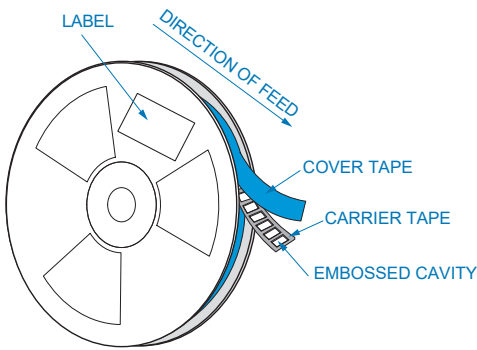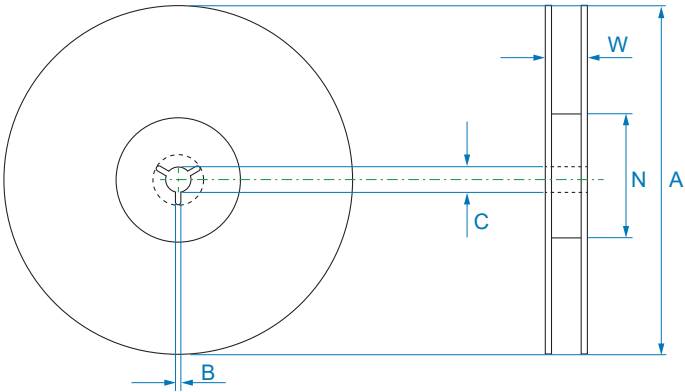



REEL DIMENSIONS (mm)

Product Series	A	W	N	B	C
F1C2-070702W	330 ± 2.0	16.8 ± 0.2	97 ± 0.5	2.2 ± 0.5	13.2 ± 0.2
F1C2-070703W	330 ± 2.0	16.8 ± 0.2	97 ± 0.5	2.2 ± 0.5	13.2 ± 0.2
F1C2-070707W	330 ± 2.0	16.8 ± 0.2	97 ± 0.5	2.2 ± 0.5	13.2 ± 0.2

Peel-off Force

The peel-off speed shall be about 300 mm/min.
The peel-off force of top cover tape shall be between 0.1 to 1.3 N

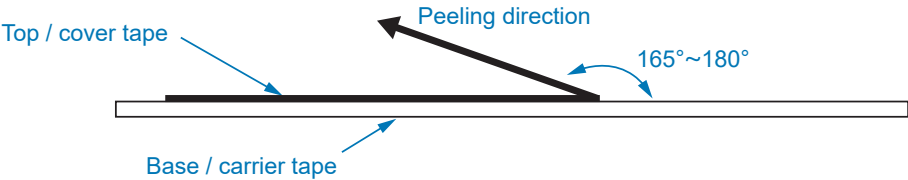

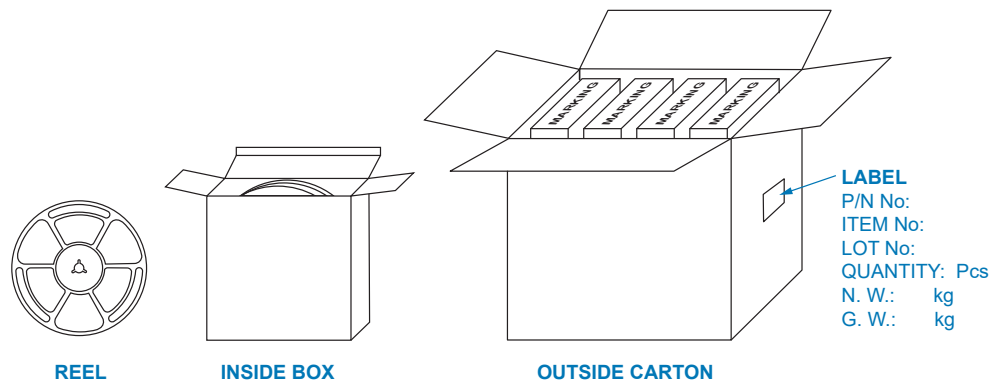

QUANTITY PER PACKAGE

Product Series	Pcs per Reel	Pcs per Inside Box	Pcs per Outside Carton
F1C2-070702W	2000	6000	24000
F1C2-070703W	1500	4500	18000
F1C2-070707W	700	2100	8400

Storage Conditions

- a) Temperature conditions: <35°C.
- b) Humidity conditions between 35% - 65%.
- c) Moisture Sensitivity Level (MSL): Level 1.
- d) Storage of material to be in a sulfur and chlorine free environment.

REVISION HISTORY

Rev.	Description	Date
1	initial release	May/24/2024
A		

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Bel Fuse Inc.
300 Executive Drive, Suite 300
West Orange, NJ 07052
United States

© 2024 Bel Fuse Inc.

Toll Free 866-239-5777
Tel 516-239-5777 | Fax 516-239-7208
sales@signaltransformer.com
techhelp@signaltransformer.com

[belfuse.com](#)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Inductors - SMD category:](#)

Click to view products by [Bel Fuse manufacturer:](#)

Other Similar products are found below :

[LLQPB201214T1R0M](#) [LLXND3030QKT470MNG](#) [LLQPB160807T4R7M](#) [LVS606045-6R8M-N](#) [SSL1306T-101M-N](#)
[CDRH8D43RT125NP-680MC](#) [CDRH70D45BT150NP-101MC](#) [CDRH10D68RT125NP-102PC](#) [CD43NP-1R0MC](#) [CDRH60D45BT150NP-331MC](#) [CDRH104NP-221MC](#) [CDRH5D28RBH125NP-100MC](#) [CDRH6D38T125NP-330PC](#) [CDRH60D45BT150NP-221MC](#) [CDRR126NP-331MC](#) [CDRH60D45BT150NP-4R7NC](#) [CDRH124NP-331MC](#) [CD75T125NP-221KC](#) [CDRH70D45BT150NP-471MC](#) [DEP1016NP-330PB](#)
[CDRH6D38T125NP-3R9NC](#) [CDRH127L125NP-680MC](#) [CD43T125NP-680KC](#) [CDRR7D45T125NP-6R8MC](#) [CD105T125NP-681KC](#)
[CDRH8D43RT125NP-5R6NC](#) [CDRH60D45BT150NP-100MC](#) [0630CDMCDDS-R15MC](#) [CDRCH12D78BNP-220MC](#) [CDRH40D18ANP-4R7NC](#) [CD75T125NP-471KC](#) [CD105T125NP-101KC](#) [CDRH80D65BT150NP-102MC](#) [CD75T125NP-101KC](#) [CDRH10D60BT150NP-101MC](#) [CDRH104RT125NP-6R8PC](#) [CD105T125NP-331KC](#) [CDRH104RT125NP-221MC](#) [CDRH40D18ANP-220NC](#)
[CDRH70D45BT150NP-100MC](#) [CDRH5D28RBH125NP-101MC](#) [CDRH80D65BT150NP-471MC](#) [CDRH40D18ANP-100NC](#)
[CDRH127L125NP-102MC](#) [WLPH201610M1R0PS](#) [78438336068HT](#) [744045470](#) [IHLP5050CEEK3R3MA1](#) [744045680](#) [744032470](#)