


SERIES: F2D2-2918T | DESCRIPTION: HIGH CURRENT POWER INDUCTORS

FEATURES

- Ferrite core
- Moisture Sensitivity: Level (MSL) 1
- High inductance, high current, low magnetic loss, low ESR, small parasitic capacitance
- Operating temperature -40°C to 125°C



MODEL	Inductance (Lo)	Tolerance	DC Resistance (DCR)	Saturation Current (Isat)	Temperature Rise Current (Irms)
	typ [μH]	typ [± %]	max [mΩ]	typ [A]	typ [A]
F2D2-2918T-3R3MC	3.30	20	2.86	92.5	28.0
F2D2-2918T-4R7MC	4.70	20	2.86	61.2	28.0
F2D2-2918T-6R8MC	6.80	20	2.86	45.0	28.0
F2D2-2918T-100MC	10.0	20	2.86	31.2	28.0
F2D2-2918T-150MC	15.0	20	2.86	21.2	28.0
F2D2-2918T-220MC	22.0	20	2.86	14.0	28.0
F2D2-2918T-330MC	33.0	20	2.86	8.70	28.0

Notes:

- Referenced ambient temperature 25°C
- Test Condition: 100 kHz, 0.1 Vrms
- Saturation Current - Isat (typ): DC current (A) that will cause L0 to drop approximately 20%
Isat (max): DC current (A) that will cause L0 to drop 20% max
Temperature Rise Current - Irms (typ): DC current (A) that will cause an approximate ΔT of 40°C
Irms (max): DC current (A) that will cause an approximate ΔT of 40°C max
- Operating temperature range includes self-temperature rise

PART NUMBER KEY

F2D2 - 2918T - XXX XX

Type / Product Series

F2D2-2918T = High Current Power Inductors

Inductance *

1R0 = 1.0 μH

C = Coating

Inductance Tolerance

M = ±20%

* Note: Inductance expressed by three figures. The unit is micro henry (μH). The first and second figures are significant digits, the third figure expresses the number of zeros which follow the two figures. If there is a decimal point, it is expressed by the capital letter "R" (3R8 = 3.8 μH). In that case, all figures are significant digits.

SAFETY AND COMPLIANCE

Parameter	Compliant
RoHS	Compliance with ROHS, Reach compliant and Halogen Free

ENVIROMENTAL


Parameter	Conditions	Min	Typ	Max	Units
Operating temperature	Including coils self-temeprature rise	-40		125	°C
Storage temperature		-40		125	°C

MECHANICAL


Parameter	Conditions	Min	Typ	Max	Units
Core material	Ferrite				
Dimensions	27.9 x 27.9 x 17.8				mm
Weight	36.2				g

MECHANICAL DRAWING








Units: mm

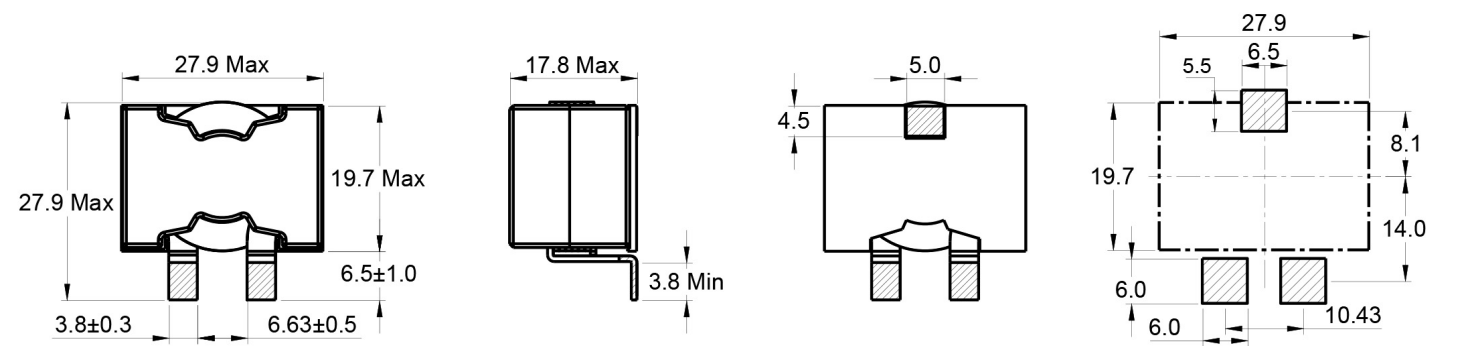


ELECTRICAL DIAGRAM



PERFORMANCE CURVES

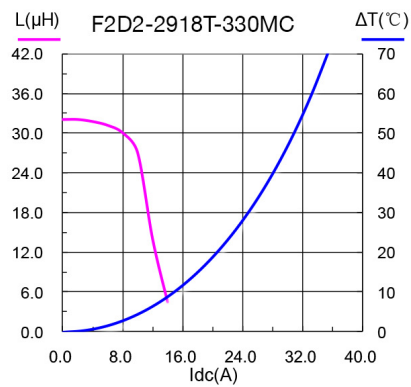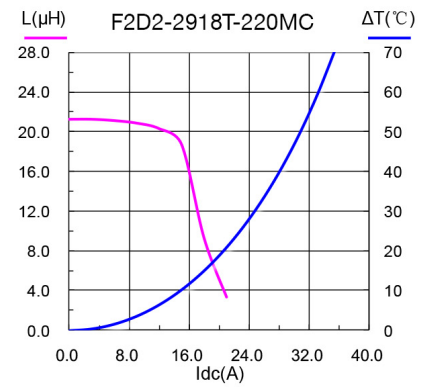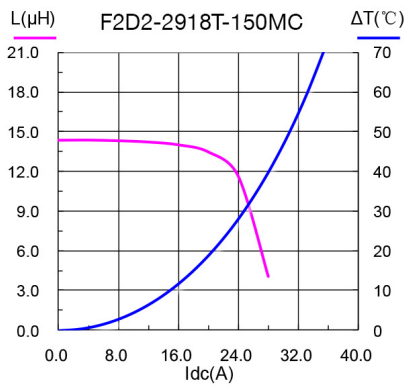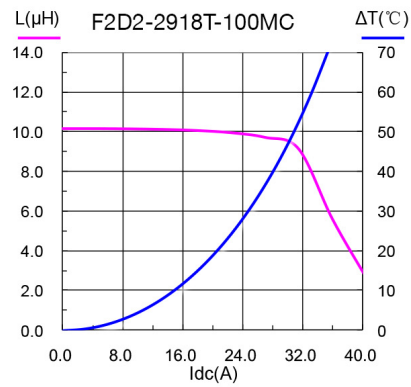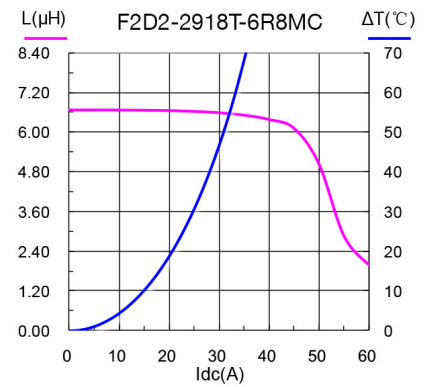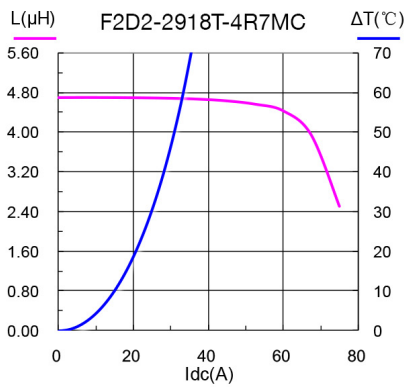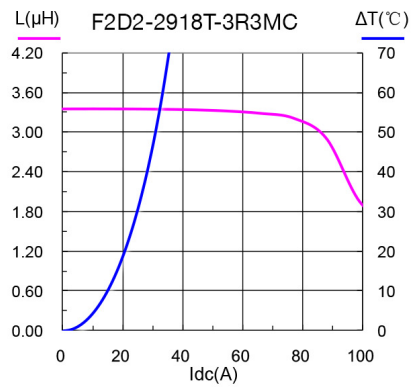

REFLOW SOLDERING TEMPERATURE CURVE

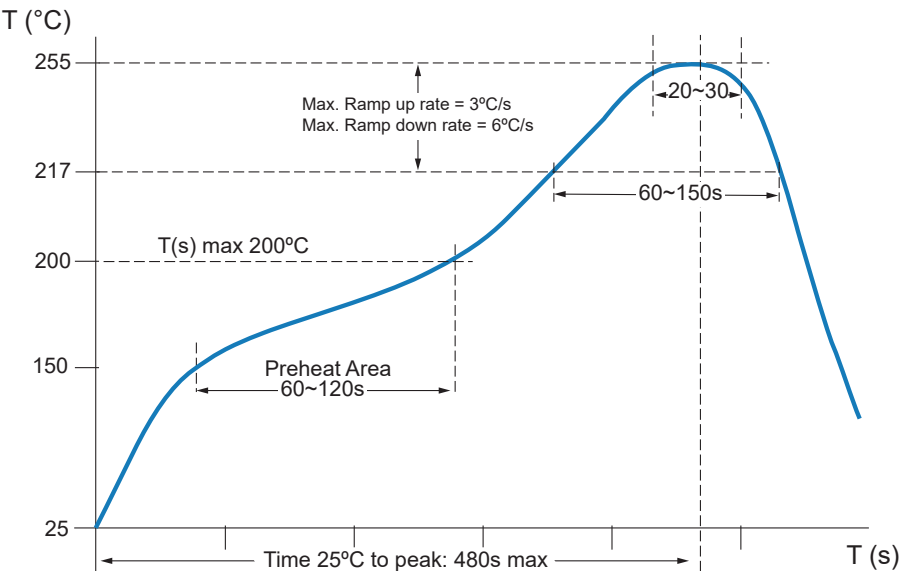


CLASSIFICATION OF PEAK PACKAGE BODY TEMPERATURE

	Package Thickness	Package Volume		
		< 350 mm ³	350 ~ 2000 mm ³	> 2000 mm ³
PB-Free Assembly	< 1.6 mm	260 $^{\circ}\text{C}$	260 $^{\circ}\text{C}$	260 $^{\circ}\text{C}$
	1.6 ~ 2.5 mm	260 $^{\circ}\text{C}$	250 $^{\circ}\text{C}$	245 $^{\circ}\text{C}$
	≥ 2.5 mm	250 $^{\circ}\text{C}$	245 $^{\circ}\text{C}$	245 $^{\circ}\text{C}$


QUANTITY PER TRAY & PACKING INFORMATION

Units: mm

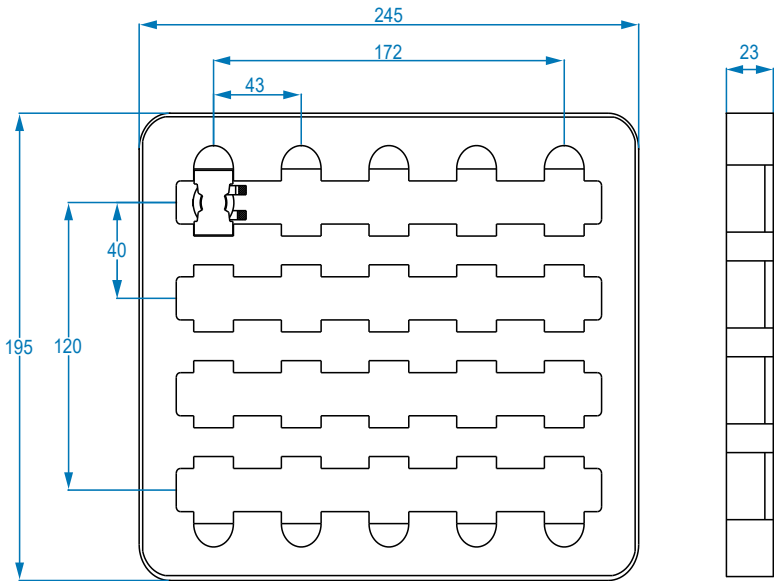

PACKAGE DIMENSIONS (mm)

Product Series	L0	W0	H0	L	W	H
F2D2-2918T	265	205	30	275	232	261

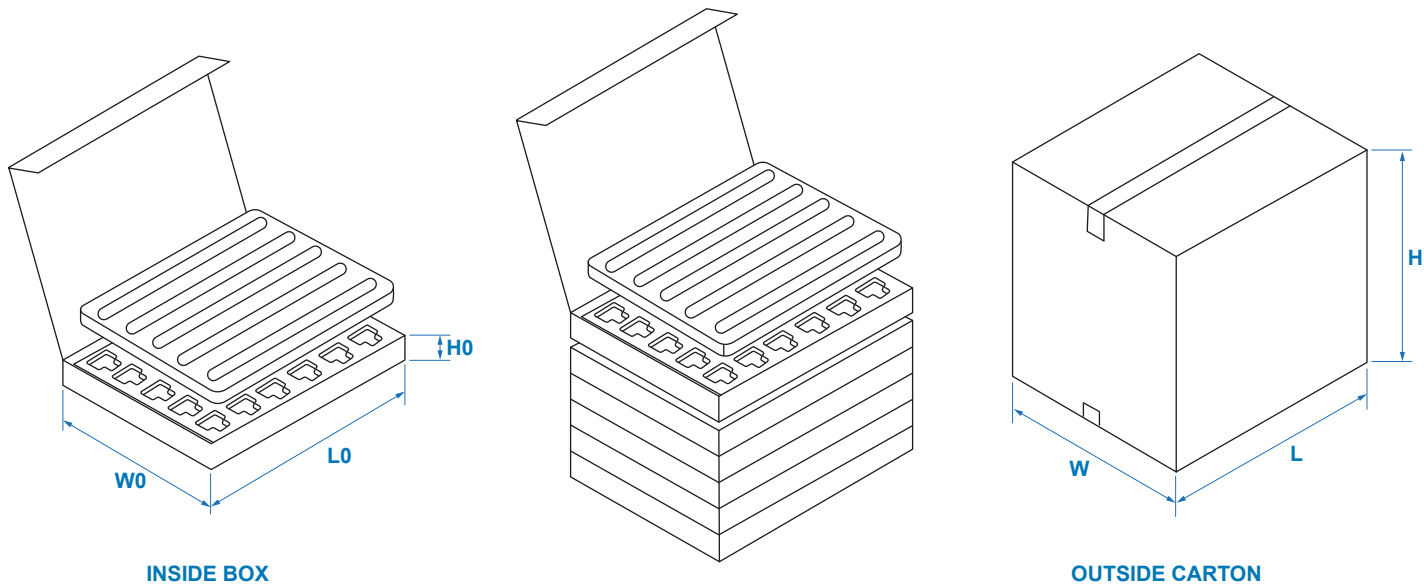

QUANTITY PER PACKAGE

Product Series	Pcs per Tray	Qty of Trays	Pcs per Outside Carton
F2D2-2918T	20	8	160

Storage Conditions

- a) Product in packing storage condition: temperature 5 ~ 40 °C, RH ≤ 70 %.
- b) It is recommended to use inductors within 12 months of delivery for optimal performance.
- c) Avoid storing in environments prone to high temperatures, excessive humidity, dust, or corrosion.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Inductors - SMD category:](#)

Click to view products by [Bel Fuse manufacturer:](#)

Other Similar products are found below :

[LLQPB201214T1R0M](#) [LLXND3030QKT470MNG](#) [LLQPB160807T4R7M](#) [SSL1306T-101M-N](#) [CDRH8D43RT125NP-680MC](#)
[CDRH70D45BT150NP-101MC](#) [CDRH10D68RT125NP-102PC](#) [CD43NP-1R0MC](#) [CDRH60D45BT150NP-331MC](#) [CDRH104NP-221MC](#)
[CDRH5D28RBH125NP-100MC](#) [CDRH6D38T125NP-330PC](#) [CDRH60D45BT150NP-221MC](#) [CDRR126NP-331MC](#) [CDRH60D45BT150NP-4R7NC](#) [CDRH124NP-331MC](#) [DEP1016NP-330PB](#) [CDRH6D38T125NP-3R9NC](#) [CDRH127L125NP-680MC](#) [CD43T125NP-680KC](#)
[CDRR7D45T125NP-6R8MC](#) [CDRH60D45BT150NP-100MC](#) [0630CDMCDDS-R15MC](#) [CDRCH12D78BNP-220MC](#) [CD75T125NP-471KC](#)
[CD105T125NP-101KC](#) [CDRH80D65BT150NP-102MC](#) [CD75T125NP-101KC](#) [CDRH10D60BT150NP-101MC](#) [CDRH104RT125NP-6R8PC](#)
[CD105T125NP-331KC](#) [CDRH104RT125NP-221MC](#) [CDRH40D18ANP-220NC](#) [CDRH70D45BT150NP-100MC](#) [CDRH5D28RBH125NP-101MC](#) [CDRH80D65BT150NP-471MC](#) [CDRH127L125NP-102MC](#) [WLPH201610M1R0PS](#) [78438336068HT](#) [744045470](#)
[IHLP5050CEEK3R3MA1](#) [744045680](#) [744032470](#) [74437346150](#) [7687709472](#) [7687709682](#) [7687714470](#) [7687779470](#) [SRP2512CL-1R0M](#)
[AIML-0603HC-100M-T](#)