


H05V-K, H07V-K
Flexible, PVC sheathed single core cables acc. to EN 50525-2-31

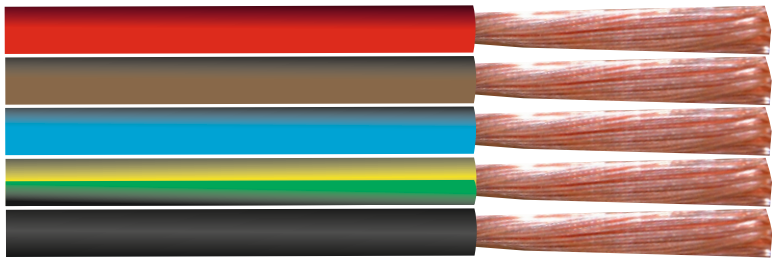

Technical Data:

Operating temperature:
Fixed installation: -40°C to 80°C
Min. installation temp.: -5°C
Operating voltage:
for cross section ≤ 1,0mm² U_i/U=300/500V
for cross section ≥ 1,5mm² U_i/U=450/750V
Test voltage:
for cross section ≤ 1,0mm² 50Hz: 2000V
for cross section ≥ 1,5mm² 50Hz: 2500V
Insulation resistance: 20MΩxkm
Min. bending radius:
Ø≤8mm: 4xØ
8mm<Ø≤12mm: 5xØ
Ø>12mm: 6xØ

Construction:

Conductors: multi-stranded, bare copper conductors class 5 (as per PN-EN 60228, EN 60228, IEC 60228)
Insulation: special PVC
Core identification: colours acc. to the table

Application:

Single core cables with PVC insulation for connections in devices, switchboards, lighting, etc.
Cables classified according to **PN-EN 50575 (CPR)**.

H05V-K
Packaging: box 100m, Operating voltage U_i/U=300/500V

Cat. no.	Cross section [mm²]	Outer diameter [mm]	Approximate cable weight [kg/km]
IG2050_ _	0,5	2,2	9
IG2051_ _	0,75	2,4	12
IG2052_ _	1,0	2,5	14

													
BLACK	BLUE	RED	BROWN	GN/YL	WHITE	GREY	ORANGE	PINK	VIOLET	DK-BLUE	YELLOW	GREEN	TURQ.
03	06	05	09	13	10	02	04	43	08	44	11	07	45

H05V-K, H07V-K
 Flexible, PVC sheathed single core cables acc. to EN 50525-2-31

H07V-K
 Packaging: box 100m, Operating voltage U₀/U=450/750V

Cat. no.	Cross section [mm²]	Outer diameter [mm]	Approximate cable weight [kg/km]
IG2000._ _	1,5	2,9	20
IG2001._ _	2,5	3,6	31

													
BLACK	BLUE	RED	BROWN	GN/YL	WHITE	GREY	ORANGE	PINK	VIOLET	DK-BLUE	YELLOW	GREEN	TURQ.
03	06	05	09	13	10	02	04	43	08	44	11	07	45

H07V-K
 Packaging: box 100m, Operating voltage U₀/U=450/750V

Cat. no.	Cross section [mm²]	Outer diameter [mm]	Approximate cable weight [kg/km]
IG2002._ _	4,0	4,0	45
IG2003._ _	6,0	4,5	63

				
BLACK	BLUE	RED	BROWN	GN/YL
03	06	05	09	13

H07V-K
 Packaging: spool/drum (various lengths), Operating Voltage U₀/U=450/750V

Cat. no.	Cross section [mm²]	Outer diameter [mm]	Approximate cable weight [kg/km]
IG2004._ _	10	5,9	105
IG2005._ _	16	6,9	158
IG2006._ _	25	8,7	245
IG2007._ _	35	9,8	335
IG2008._ _	50	11,8	485
IG2009._ _	70	13,5	660
IG2010._ _	95	15,8	880
IG2011._ _	120	17,2	1090
IG2012._ _	150	19,2	1360
IG2013._ _	185	21,8	1655
IG2014._ _	240	24,7	2180

				
BLACK	BLUE	RED	BROWN	GN/YL
03	06	05	09	13

Cable Factory BITNER reserves the right to modify the specifications without prior notice.
 Note: On customer's request other colours of cores, two colours versions and different packaging can be made.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Hook-up Wire](#) category:

Click to view products by [BITNER](#) manufacturer:

Other Similar products are found below :

[8918-BRN-1000](#) [01776.38.01](#) [M22759/16-14-5-500FT](#) [7053-RED-1000](#) [F25935-000](#) [F60898-000](#) [83004-ORG-1000](#) [83004-YEL-100](#) [83005-LT-BLU-1000](#) [83025-VIO-1000](#) [8523-RED-100](#) [8524-WHT-100](#) [8525-ORG-1000](#) [8530-BLK-1000](#) [8530-LT-BLU-100](#) [8538-009-1000](#) [8597-LT-BLU-100](#) [8898-BLK-100](#) [138498-000](#) [BFWUL3239-24-PINK](#) [C2016A.12.05](#) [C2016A.12.07](#) [C2065A.12.02](#) [8916-GRY-500](#) [8918-RED-100](#) [8919-DK-BLU-1000](#) [8919-YEL-100](#) [8920-YEL-100](#) [933205-000](#) [2841/7-YELLOW-1000](#) [2843/19-BLUE-100](#) [2843/19-GREEN-100](#) [2843/7-GREEN-100](#) [2845/7-RED-100](#) [2855/1-BLACK-100](#) [2855/1-BROWN-1000](#) [285750-010](#) [961473-000](#) [298-SILVER-100](#) [3047-YELLOW-100](#) [3048-BLUE-1000](#) [3048-YELLOW-1000](#) [3049-YELLOW-100](#) [3051-BLACK-1000](#) [3051-GREEN-1000](#) [3051-VIOLET-100](#) [3051-WH/BLACK-100](#) [3051-WH/GREEN-100](#) [3053-BLACK-1000](#) [3053-BROWN-100](#)