

描述 / Descriptions

DFN1006-2L 塑封封装单线程双向 ESD 保护二极管。

DFN1006-2L Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

特征 / Features

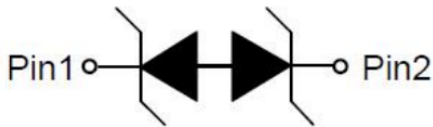
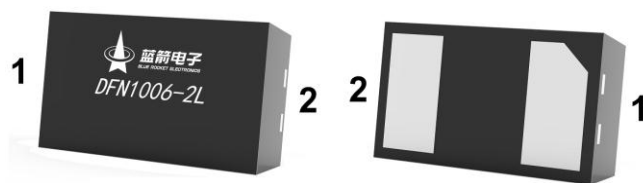
超小封装，正常响应时间小于 1ns，防静电等级达到 30KV 以上，符合 IEC61000-4-2 的 4 级 ESD 保护项目，符合 AEC-Q101 标准高可靠性要求，无卤产品。

Ultra small package, Response Time is Typically < 1 ns, ESD > 30 kV per Human Body Model,IEC61000-4-2 Level 4 ESD Protection,Qualified to AEC-Q101 Standards for High Reliability, HF Product.

用途 / Applications

适用于手机音频、MP3 播放器、数码相机、便携式设备、移动电话等用户端，满足汽车应用的严格要求。

Suitable for cellular phones audio,MP3 players, Digital cameras, Portable devices, mobile telephone and other users, Meet the stringent requirements of automotive applications.

内部等效电路 / Equivalent Circuit**引脚排列 / Pinning****印章代码 / Marking**

见印章说明。

See Marking Instructions.

极限参数 / Absolute Maximum Ratings

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Peak Pulse Power($t_p = 8/20\mu s$)	P_{PK}	80	W
Peak Pulse Current($t_p = 8/20\mu s$)	I_{PP}	5	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	KV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	$^{\circ}C$
Storage Temperature	T_{STG}	-55~+150	$^{\circ}C$

电性能参数 / Electrical Characteristics($T_a=25^{\circ}C$)


Definitions of electrical characteristics

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Reverse maximum working voltage	V_{RWM}				7.0	V
Reverse leakage current	I_R	$V_{RWM} = 7.0V$			500	nA
Reverse breakdown voltage ¹⁾	V_{BR}	$I_T=1mA$	7.2		9	V
Clamping voltage ²⁾	V_{CL}	$I_{PP} = 1A \quad t_p = 8/20\mu s$			10	V
		$I_{PP} = 5A \quad t_p = 8/20\mu s$			16	V
Junction Capacitance	C_J	$V_R = 0V \quad f = 1MHz$		7.8		pF


Notes:

1) V_{BR} is measured with a pulse test current I_T at an ambient temperature of $25^{\circ}C$.


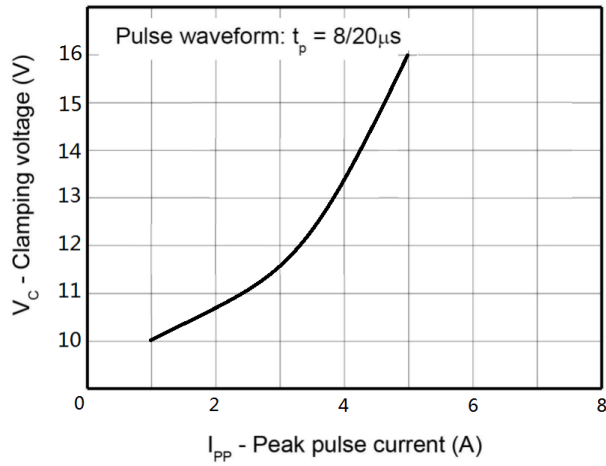
2) Non-repetitive current pulse, according to IEC61000-4-5.

电参数曲线图 / Electrical Characteristic Curve($T_a=25^{\circ}\text{C}$)

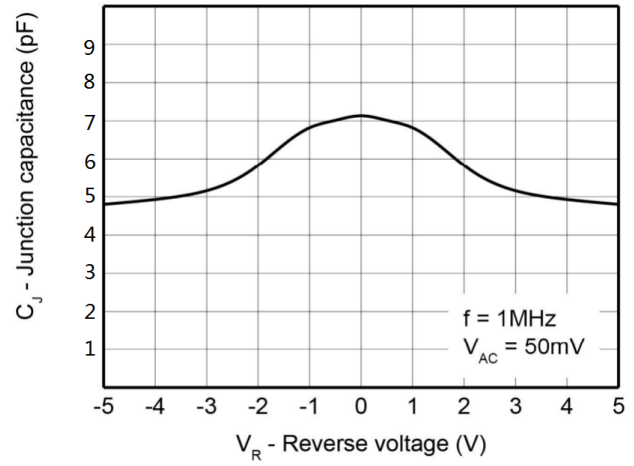
Clamping voltage vs. Peak pulse current



Capacitance vs. Reverse voltage

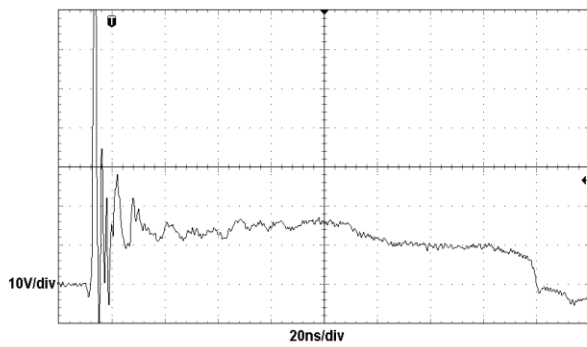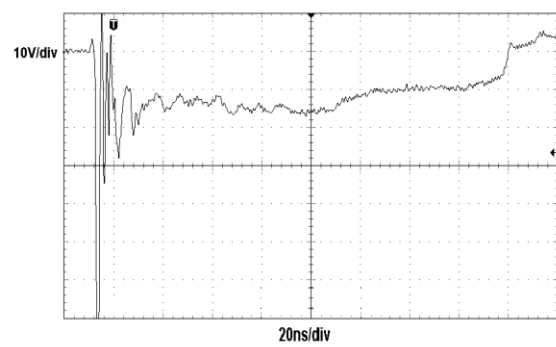
ESD clamping
(+8kV contact discharge per IEC61000-4-2)ESD clamping
(-8kV contact discharge per IEC61000-4-2)

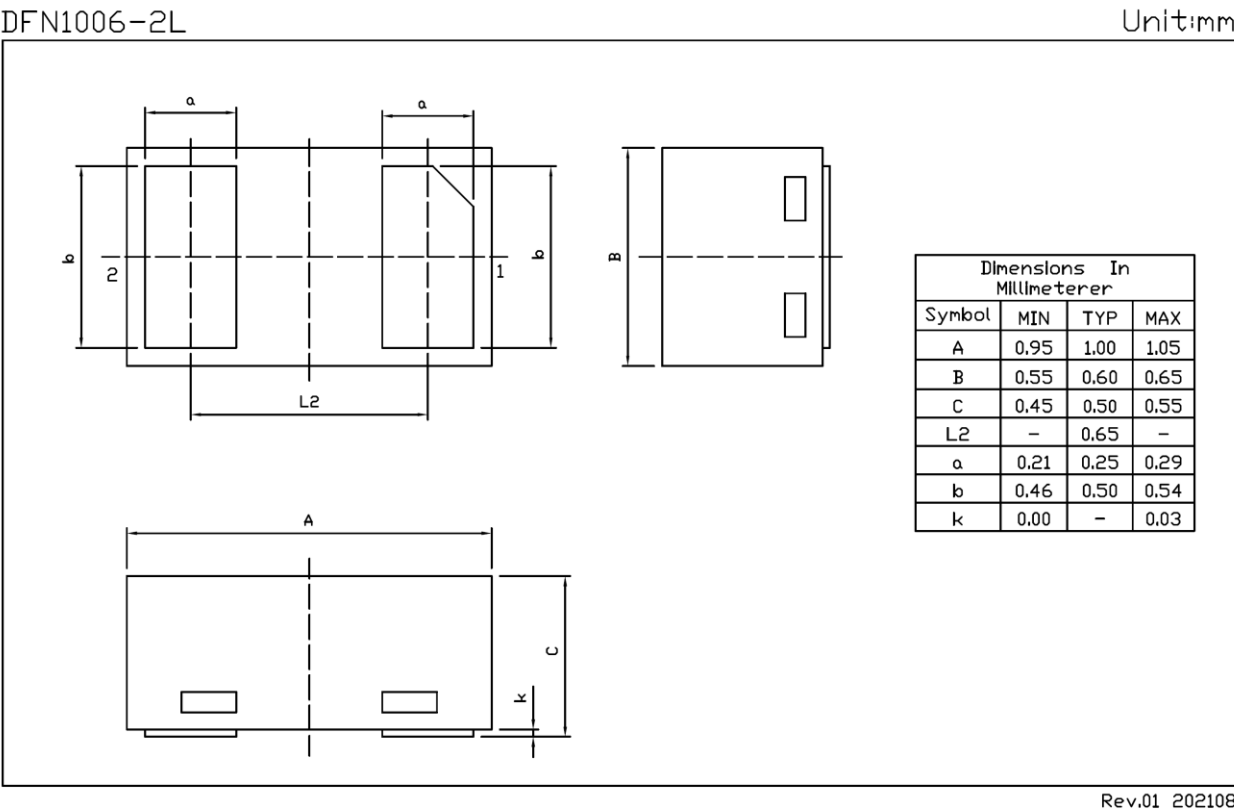外形尺寸图 / Package Dimensions





印章说明 / Marking Instructions

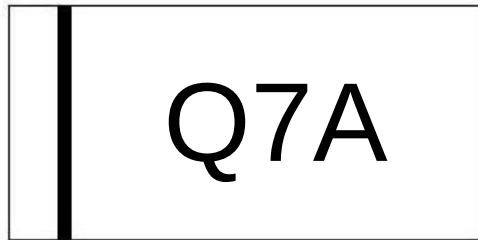

说明：

Q：为汽车无卤产品标识

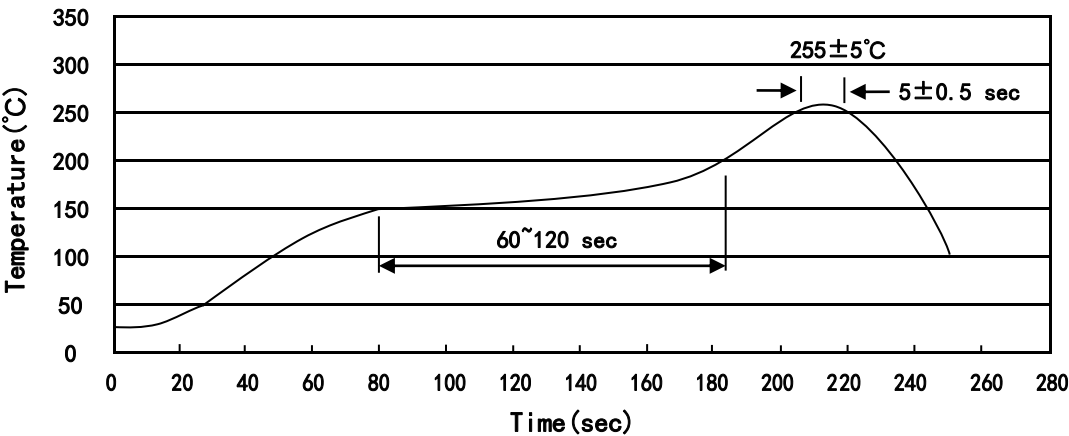
7A：为型号代码

Note：

Q：Automobile halogen-free product Code

7A：Product Type Code

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)



- 说明 :
1、预热温度 150 ~ 200°C , 时间 60 ~ 120sec;
2、峰值温度 255±5°C , 时间持续为 5±0.5sec;
3、焊接制程冷却速度为 2 ~ 10°C/sec.
- Note:
1.Preheating:150~200°C, Time:60~120sec.
2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度 : 260±5°C 时间 : 10±1 sec. Temp.:260±5°C Time:10±1 sec

包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
DFN1006-2L	10,000	10	100,000	6	600,000	7" ×8	180×120×180	390×385×205

使用说明 / Notices

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) ***category:***

Click to view products by [Blue Rocket](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D5V0F4U5P5-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [JAN1N6461](#) [P6KE8.2A](#) [JANTX1N6053A](#) [SA60CA](#) [SA64CA](#)
[SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-](#)
[5V0USP-HF](#) [3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [JAN1N6472](#) [JANTX1N6052A](#) [JANTX1N6462](#) [D3V3Q1B2DLP3-7](#)
[DRTR5V0U4SL-7](#) [SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [CEN955 W/DATA](#) [ESD101-B1-02EL E6327](#) [AOZ8808DI-03](#)
[5KP48A](#) [5KP90A](#) [ESD3V3D7-TP](#) [15KPA36A-LF](#) [P4KE56CA](#) [P4KE68A](#) [P6KE120A](#) [P6KE13CA](#) [P6KE43CA](#) [P6KE6.8CA](#) [P6KE8.2](#)
[P6SMBJ20CA](#) [JANTX1N6072A](#) [SR2835ESKG](#) [SA90CA](#) [SA8.5A](#) [SA5.0CA](#) [SA18A](#)