


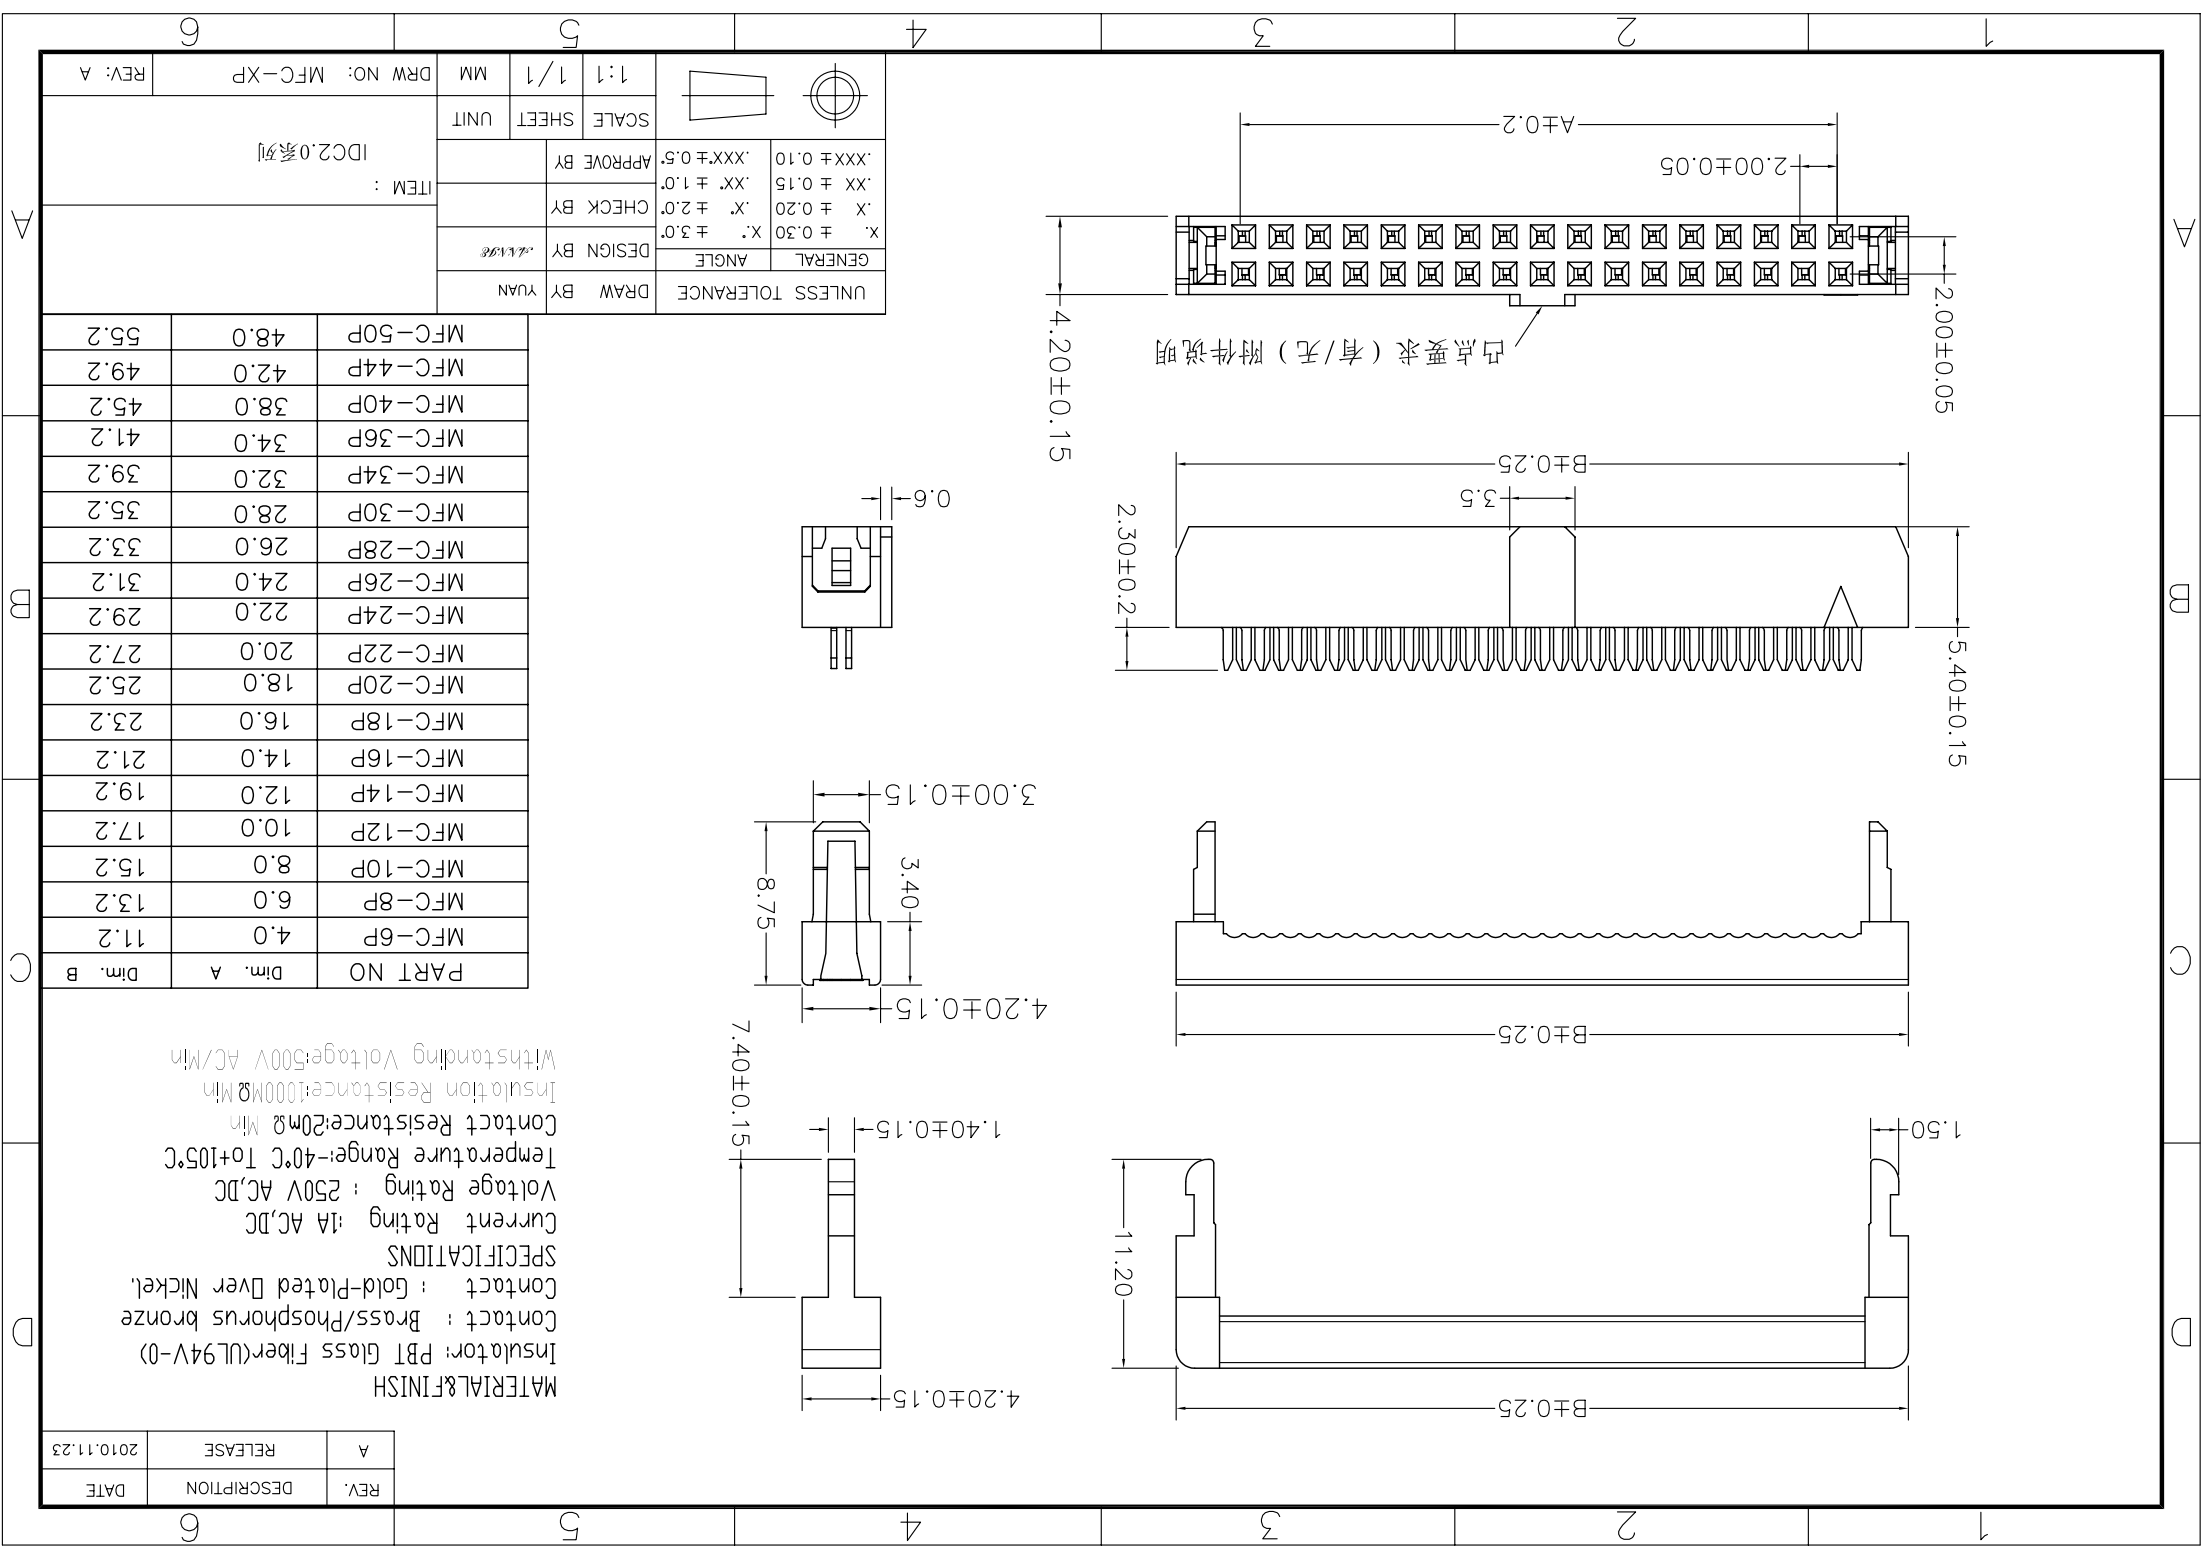

REV.	DESCRIPTION	DATE
A	RELEASE	2010.11.23

MATERIAL&FINISH
Insulator: PBT Glass Fiber(UL94V-0)
Contact : Brass/Phosphorus bronze
Contact : Gold-Plated Over Nickel.
SPECIFICATIONS
Current Rating :1A AC,DC
Voltage Rating : 250V AC,DC
Temperature Range:-40℃ To+105℃
Contact Resistance:20mΩ Min
Insulation Resistance:1000MΩ Min
Withstanding Voltage:500V AC/Min

PART NO	Dim. A	Dim. B
MFC-6P	4.0	11.2
MFC-8P	6.0	13.2
MFC-10P	8.0	15.2
MFC-12P	10.0	17.2
MFC-14P	12.0	19.2
MFC-16P	14.0	21.2
MFC-18P	16.0	23.2
MFC-20P	18.0	25.2
MFC-22P	20.0	27.2
MFC-24P	22.0	29.2
MFC-26P	24.0	31.2
MFC-28P	26.0	33.2
MFC-30P	28.0	35.2
MFC-34P	32.0	39.2
MFC-36P	34.0	41.2
MFC-40P	38.0	45.2
MFC-44P	42.0	49.2
MFC-50P	48.0	55.2

UNLESS TOLERANCE		GENERAL	ANGLE
DRAW BY		YUAN	
DESIGN BY		YUAN	
CHECK BY		YUAN	
APPROVE BY		YUAN	
SCALE		SHEET	1/1
UNIT		MM	
ITEM :		IDC2.0系列	
DRW NO:		MFC-XP	
REV:		A	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Boom](#) ***manufacturer:***

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)