

Features

- 350 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- Bidirectional Configuration
- Protects One Power or I/O Port
- ESD Protection > 40 kilovolts
- Low Working Voltage: 3.0V
- Low Clamping Voltages
- Ultra Low Capacitance: 1.5 pF Typical

**SOD-323**

IEC ComPatibility(EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 30kV$ (air), $\pm 30kV$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5(Surge): 20A, 8/20 μs


Mechanical Characteristics

- Molded JEDEC SOD-323 package
- Weight 10 milligrams (Approximate)
- Flammability rating UL 94V-0
- 8mm Tape and Reel Per EIA Standard 481
- Device Marking: Marking Code
- RoHS Compliant

Applications

- Ethernet - 10/100/1000 Base T
- Cellular Phones
- Handheld - Wireless Systems
- Personal Digital Assistant (PDA)
- USB Interface

Pin Configuration

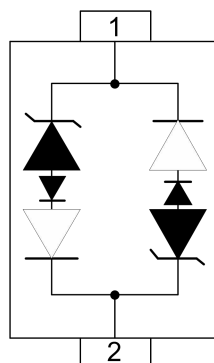
**Bidirectional**

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p=8/20\mu s$) - See Figure 1	P_{PP}	350	Watts
Peak Pulse Current ($t_p=8/20\mu s$)	I_{PP}	18	A
Operating Temperature	T_J	-55 to + 150	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{PT}	Punch-through Breakdown Voltage @ I_T
V_{SB}	Snap-Back Voltage @ I_{SB}
I_{SB}	Snap-Back Current
I_{PT}	Test Current
V_{PTF}	Forward Punch-through Breakdown Voltage @ I_F
I_{PTF}	Forward Test Current

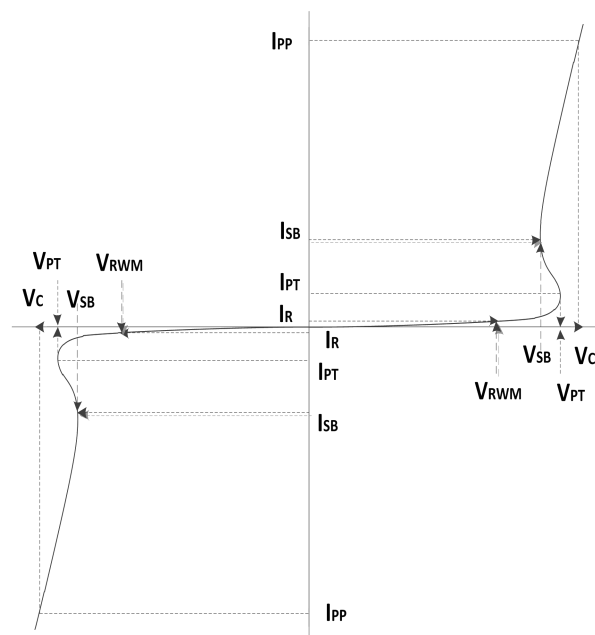

Electrical characteristics

BSD3C031LX						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}	See Note1			3.0	V
Punch-through Voltage	V_{PT}	$I_{PT}=1\mu A$	4.0			V
Snap-Back Voltage	V_{SB}	$I_{SB}=50mA$	3.5			V
Reverse Leakage Current	I_R	$V_{RWM}=3.0V$			50	nA
Clamping Voltage	V_C	$I_{PP} = 18A, t_p = 8/20\mu s$		15	18	V
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$		1.5	2.0	pF

Note 1: Part numbers with an additional "B" suffix are bidirectional devices

Note 2: For Bidirectional Devices Only: Electrical characteristics apply in both directions.

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

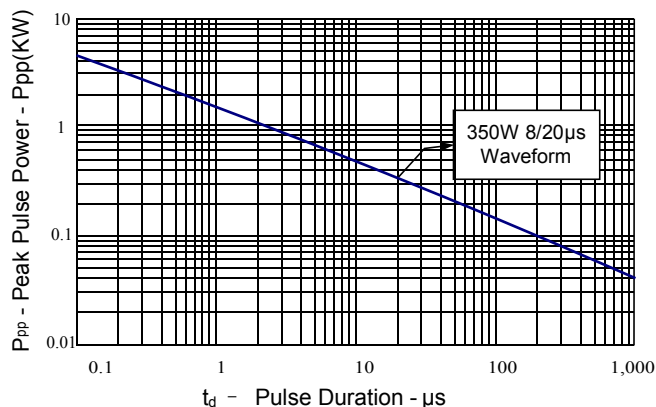


Figure 2: Power Derating Curve

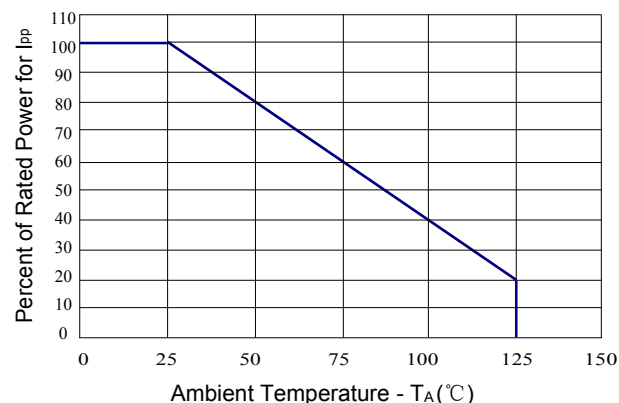


Figure 3: Clamping Voltage vs. Peak Pulse Current

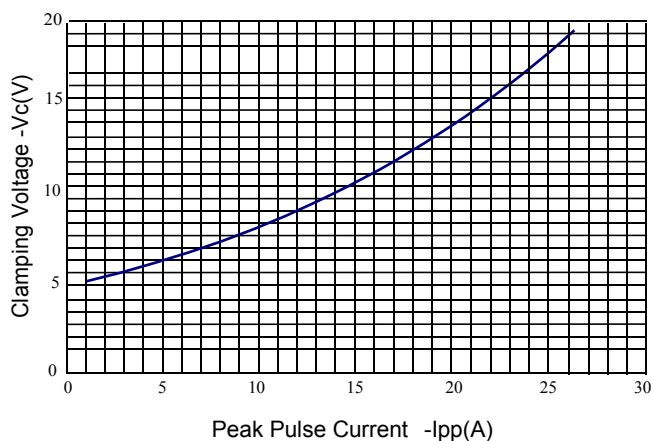


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

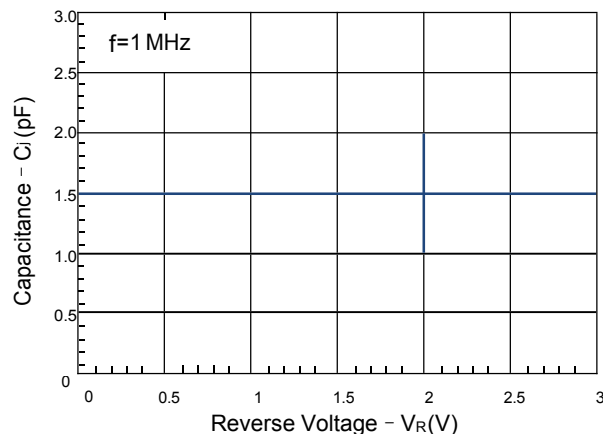


Figure 5: ESD Clamping(8kV Contact per IEC 61000-4-2)




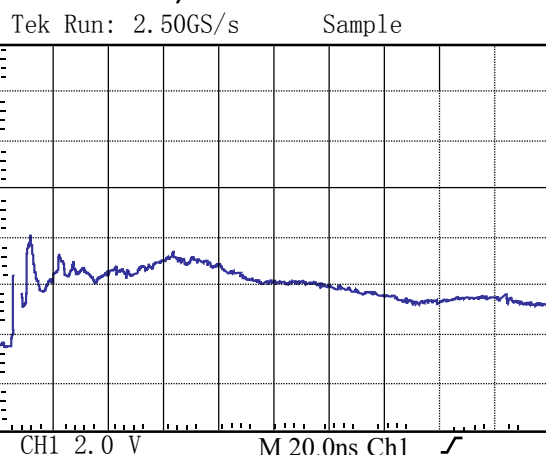



Figure 5: ESD Clamping(-8kV Contact per IEC 61000-4-2)

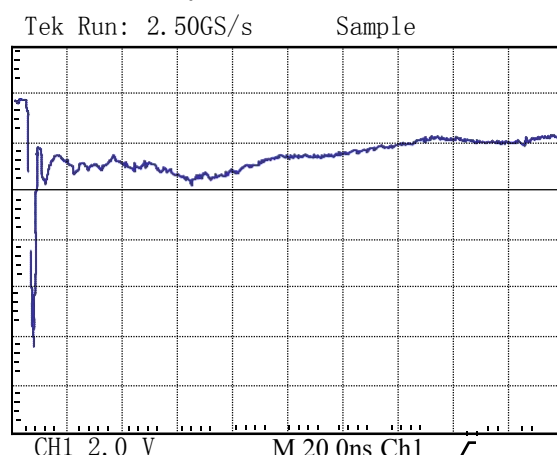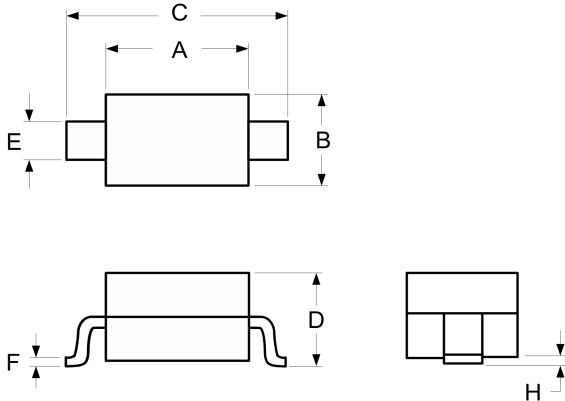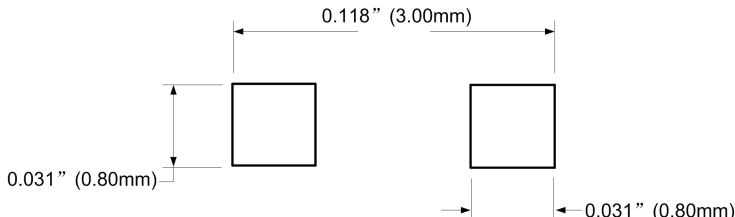

Outline Drawing – SOD323

PACKAGE OUTLINE 	 SOD-323 DIMENSIONS <table><tr><th rowspan="2">SYMBOL</th><th colspan="2">MILLIMETER</th><th colspan="2">INCHES</th></tr><tr><th>MIN</th><th>MAX</th><th>MIN</th><th>MAX</th></tr><tr><td>A</td><td>1.60</td><td>1.90</td><td>0.063</td><td>0.075</td></tr><tr><td>B</td><td>1.15</td><td>1.45</td><td>0.045</td><td>0.057</td></tr><tr><td>C</td><td>2.39</td><td>2.70</td><td>0.094</td><td>0.106</td></tr><tr><td>D</td><td>0.92</td><td>1.10</td><td>0.036</td><td>0.043</td></tr><tr><td>E</td><td>0.25</td><td>0.40</td><td>0.010</td><td>0.016</td></tr><tr><td>F</td><td>0.10</td><td>0.20</td><td>0.004</td><td>0.008</td></tr><tr><td>H</td><td>-</td><td>0.10</td><td>-</td><td>0.004</td></tr></table>	SYMBOL	MILLIMETER		INCHES		MIN	MAX	MIN	MAX	A	1.60	1.90	0.063	0.075	B	1.15	1.45	0.045	0.057	C	2.39	2.70	0.094	0.106	D	0.92	1.10	0.036	0.043	E	0.25	0.40	0.010	0.016	F	0.10	0.20	0.004	0.008	H	-	0.10	-	0.004
SYMBOL	MILLIMETER		INCHES																																										
	MIN	MAX	MIN	MAX																																									
A	1.60	1.90	0.063	0.075																																									
B	1.15	1.45	0.045	0.057																																									
C	2.39	2.70	0.094	0.106																																									
D	0.92	1.10	0.036	0.043																																									
E	0.25	0.40	0.010	0.016																																									
F	0.10	0.20	0.004	0.008																																									
H	-	0.10	-	0.004																																									
MOUNTING PAD 	Notes 1. Controlling Dimensions in Millimeters. 2. Dimensions are exclusive of mold flash and metal burrs. TAPE & REEL ORDERING NOMENCLATURE 1. Surface mount product is taped and reeled in accordance with EIA-481.																																												

MarkingCodes



Package Information

Qty: 3k/Reel

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ESD Suppressors / TVS Diodes](#) ***category:***

Click to view products by [Bourne](#) ***manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS E6327](#) [ESD105-B1-02EL E6327](#) [ESD112-B1-02EL E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)