

## Features

- 100 Watts Peak Pulse Power per Line ( $t_p = 8/20\mu s$ )
- Replacement for MLV (0603)
- Protects one I/O or power line
- Low Clamping Voltage
- Working Voltage: 05V
- Low Leakage Current
- Response Time is Typically < 1 ns

**SOD-523**

## IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 15kV$  (air),  $\pm 8kV$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 8A (8/20 $\mu s$ )


## Mechanical Characteristics

- JEDEC SOD-523 package
- Molding compound flammability rating:  
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA 481
- RoHS Compliant

## Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 players

## Schematic & PIN Configuration

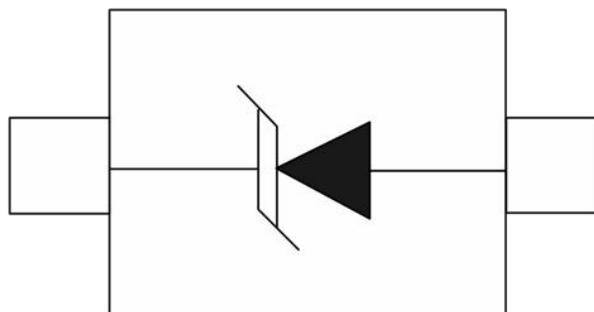
**SOD-523 (Top View)**

**Absolute Maximum Rating**

Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p = 8/20\mu s$ )	$P_{PP}$	100	Watts
Peak Forward Voltage ( $I_F = 1A$ , $t_p = 8/20\mu s$ )	$V_{FP}$	1.4	V
Operating Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

**Electrical Parameters (T=25°C)**


Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_c$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

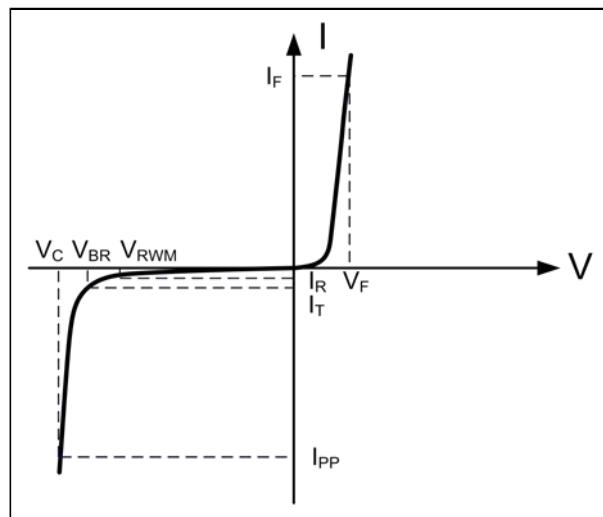**Electrical Characteristics**


Part Number	Reverse Stand off Voltage $V_{RWM}$ (Volts)	Minimum Breakdown Voltage $V_{BR}@1mA$ (Volts)	Maximum Clamping Voltage $V_c @ I_{PP}$ (Volts)	Maximum Peak Pulse Current $I_{pp}$ (Amps)	Maximum Reverse Leakage current $I_R @ V_{RWM} (\mu A)$	Typical Capacitance DC=0V CJ@ 1 MHz (pF)
BSD5A051V	05	6	12	8.0	1	30

## Typical Characteristics


**Figure 1: Peak Pulse Power Vs Pulse Time**

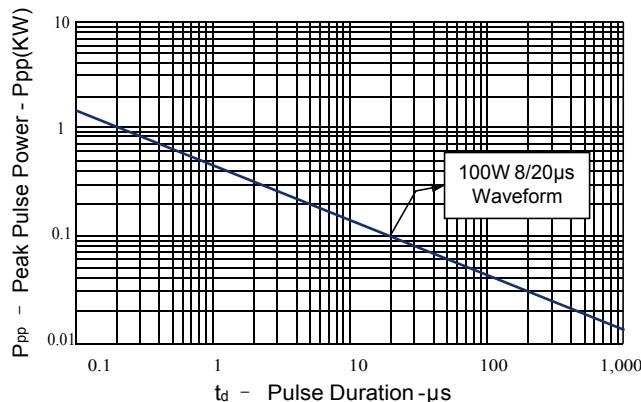


**Figure 2: Power Derating Curve**

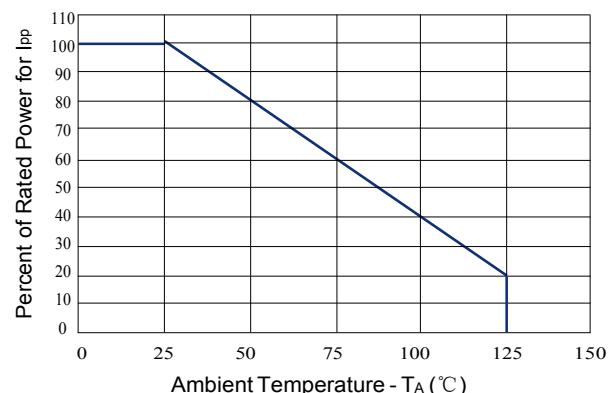


**Figure 3: Clamping Voltage vs. Peak Pulse Current**

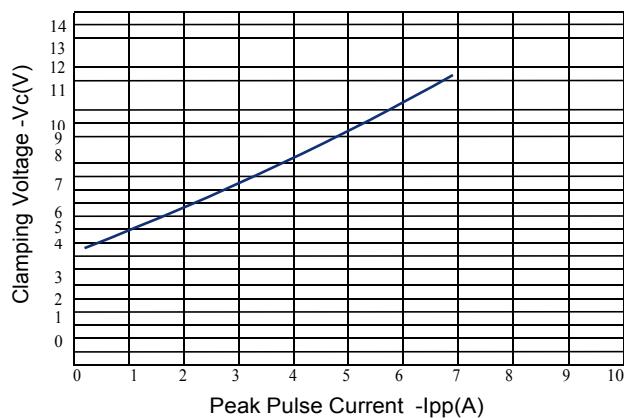

**Figure 4: Normalized Junction Capacitance vs. Reverse Voltage**

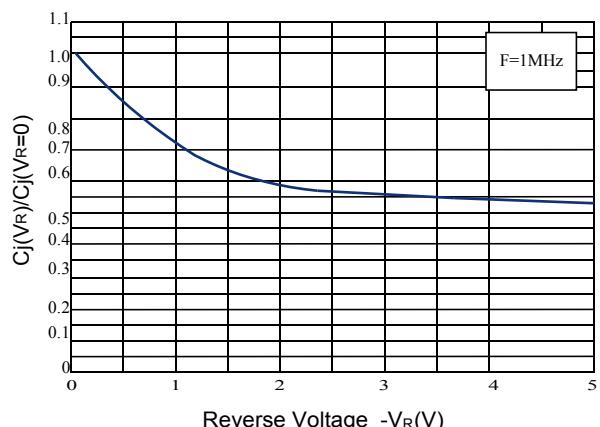


**Figure 5: Pulse Waveform**

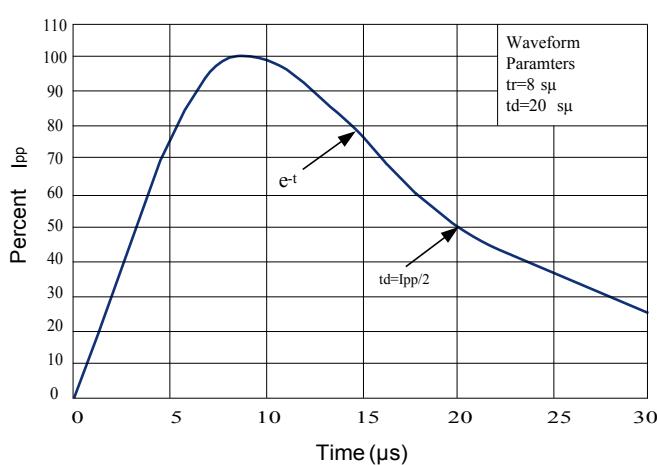

**Figure 6: ESD Clamping( 8kV Contact per IEC 61000-4-2)**


Tek Run: 2.50GS/s      Sample

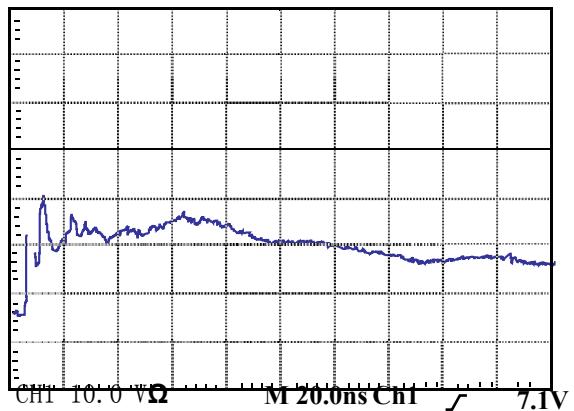

**Outline Drawing – SOD-523**

PACKAGE OUTLINE		SOD-523			
SYMBOL	DIMENSIONS	MILLIMETER		INCHES	
		MIN	MAX	MIN	MAX
A	0.50	0.70	0.020	0.028	
b	0.25	0.35	0.010	0.014	
C	0.07	0.20	0.0028	0.0079	
D	1.10	1.30	0.043	0.051	
E	0.70	0.90	0.028	0.035	
H <sub>E</sub>	1.50	1.70	0.059	0.067	
L	0.15	0.25	0.006	0.010	

 <p>DIMENSIONS: MILLIMETERS</p>	<b>Notes</b> <ul style="list-style-type: none"> <li>1. Controlling Dimensions in Millimeters.</li> <li>2. Dimensions are exclusive of mold flash and metal burrs.</li> </ul>
--	--

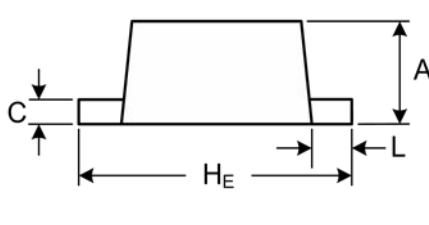**Marking Codes****Package Information**

Qty: 5k/Reel

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for ESD Suppressors / TVS Diodes category:***

***Click to view products by Bourne manufacturer:***

Other Similar products are found below :

[60KS200C](#) [D18V0L1B2LP-7B](#) [D5V0F4U5P5-7](#) [DESD5V0U1BB-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#) [P6KE8.2A](#)  
[SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ33CATR](#) [SMBJ8.0A](#) [ESD101-B1-02ELS](#) [E6327](#) [ESD105-B1-02EL](#) [E6327](#) [ESD112-B1-02EL](#) [E6327](#) [ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201](#) [E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#)  
[MMAD1108/TR13](#) [5KP100A](#) [5KP15A](#) [5KP18A](#) [5KP48A](#) [5KP90A](#)