



Features

- Designed to UL 248-19 (gPV) photovoltaic fuse standard
- 1500 VDC and 4-30 A ratings available
- Up to 50 kA interrupting rating
- Available in ferrule and crimp cap options
- RoHS compliant* and halogen free**



PF-PVC150R Series – Photovoltaic (gPV) Power Fuses

Clearing Time Characteristics for Series

% of Current Rating	Clearing Time at 25 °C	
	Minimum	Maximum
100 %	4 hours	—
135 %	—	60 minutes
200 %	—	4 minutes

Additional Information

Click these links for more information:



[PRODUCT
SELECTOR](#)



[TECHNICAL
LIBRARY](#)



[INVENTORY](#)



[SAMPLES](#)



[CONTACT
US](#)

Electrical Characteristics

Model	Rated Current (A)	Nominal Resistance (mΩ)***	Rated Voltage	Interrupting Rating	Nominal I²t (A²s)****	Watts Loss (W)		 LISTED
						@ 70 % In	@ 100 % In	
PF-PVC150R4C1	4	106.7	1500 VDC	50 kA @ 1500 VDC	56	1.7	2.8	E526252
PF-PVC150R4C2								
PF-PVC150R5C1	5	68.1			70	1.7	2.8	
PF-PVC150R5C2								
PF-PVC150R6C1	6	43.3			86	1.8	2.9	
PF-PVC150R6C2								
PF-PVC150R8C1	8	30.0			192	1.8	3.1	
PF-PVC150R8C2								
PF-PVC150R10C1	10	25.3			320	2.0	3.3	
PF-PVC150R10C2								
PF-PVC150R12C1	12	19.0			576	2.1	3.5	
PF-PVC150R12C2								
PF-PVC150R15C1	15	16.1			675	3.1	5.6	
PF-PVC150R15C2								
PF-PVC150R16C1	16	12.5			768	3.3	6.5	
PF-PVC150R16C2								
PF-PVC150R20C1	20	10.3			880	4.4	6.8	
PF-PVC150R20C2								
PF-PVC150R25C1	25	7.27			937	4.9	8.1	
PF-PVC150R25C2								
PF-PVC150R30C1	30	4.80			3060	5.0	10.0	
PF-PVC150R30C2								

*** Resistance value was measured with less than 10 % of rated current at 25 °C.

**** Nominal I²t value is measured at 1000 % of rating current.

* RoHS Directive 2015/863, Mar 31, 2015 and Annex.

** Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

"SinglFuse" is a trademark of Bourns, Inc. Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.




CALIFORNIA WARNING Can expose you to lead, a carcinogen and reproductive toxicant. See www.P65Warnings.ca.gov

PF-PVC150R Series – Photovoltaic (gPV) Power Fuses


BOURNS®

Product Dimensions


Ferrule / C1 Type

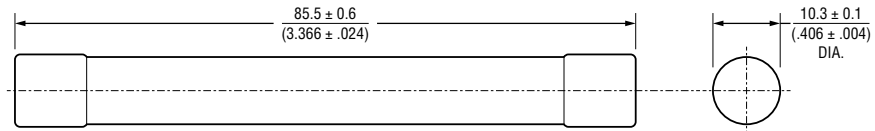

Crimp Cap / C2 Type

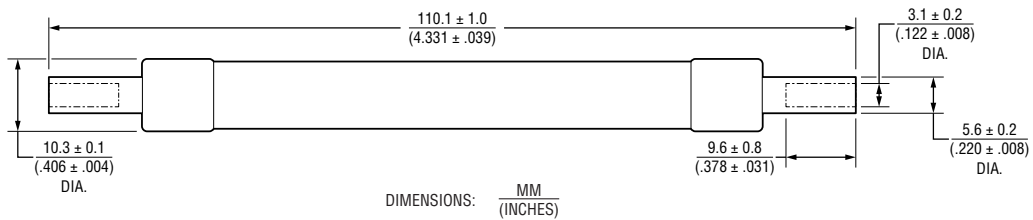

Average Pre-Arcing Time vs. Current Curves

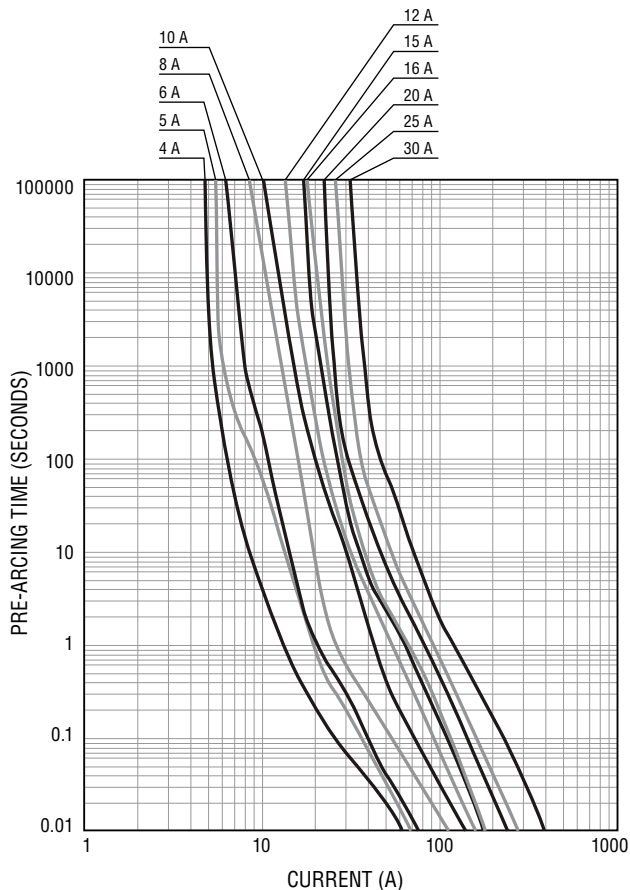

How to Order

PF - PVC 150R 10 C1

POW'rFuse™ _____
 Product Designator _____
 Series Name _____
 Rated Voltage _____
 150R = 1500 VDC
 Rated Current _____
 4 - 30 = 4A - 30 A
 Mounting Type _____
 C1 = Ferrule, Type 1
 C2 = Crimp Cap, Type 2

Packaging

Model	Quantity	
	Inner Box	Outer Box
PF-PVC150R-C1	20 pcs.	700 pcs.
PF-PVC150R-C2	35 pcs.	420 pcs.

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PF-PVC150R Series – Photovoltaic (gPV) Power Fuses

BOURNS®

Current Rating Thermal Derating Curve

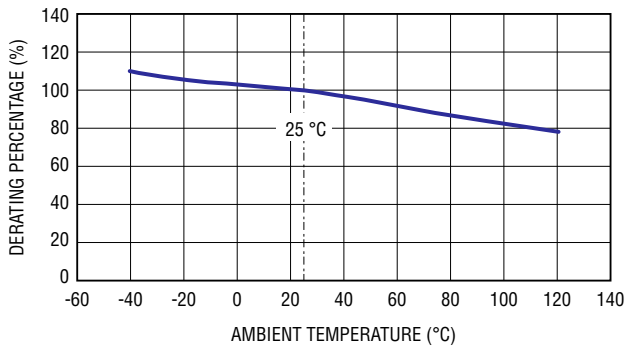

Environmental Characteristics

Operating Temperature	-40 °C to +90 °C
-----------------------	------------------

Typical Part Marking

Rating Current (A)	Note	Style	Marking
4	4	Label stuck to tube	 PF-PVC150R (Note) A 1500VDC gPV IR 50kA
5	5		
6	6		
8	8		
10	10		
12	12		
15	15		
16	16		
20	20		
25	25		
30	30		

BOURNS®

Americas: Tel: +1 951-781-5500 • Email: americus@bourns.com

Mexico: Tel: +52-614-478-0400 • Email: mexicus@bourns.com

Asia: Tel: +886-2-2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

www.bourns.com

REV. 08/25

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Industrial & Electrical Fuses](#) category:

Click to view products by [Bourns](#) manufacturer:

Other Similar products are found below :

[A5Y10-11](#) [BP/NON-30](#) [KTN-R-10](#) [A100Z40-4ATI](#) [382000](#) [382010](#) [382015](#) [382030](#) [381455](#) [381325](#) [381360](#) [382110](#) [382115](#) [382120](#)
[382125](#) [384510](#) [397180](#) [397270](#) [365020](#) [365025](#) [365030](#) [365035](#) [365045](#) [365050](#) [365070](#) [365075](#) [365080](#) [365225](#) [365230](#) [365245](#)
[365255](#) [365270](#) [365280](#) [365290](#) [365370](#) [365372](#) [365380](#) [365392](#) [365395](#) [365465](#) [365467](#) [365470](#) [365472](#) [365475](#) [371025](#) [371035](#)
[371050](#) [371060](#) [371070](#) [371380](#)