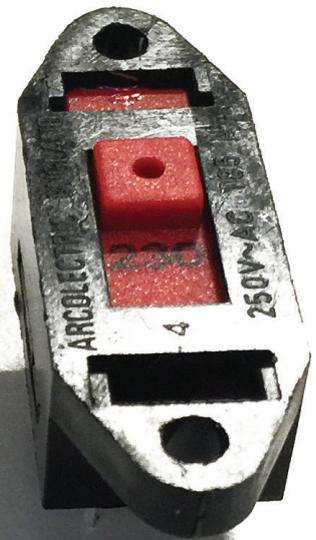


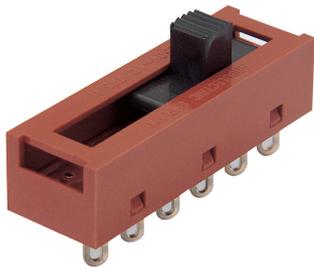
With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- Ratings up to 16A, 250V ac
- PCB and solder terminals
- Voltage Selector Models
- Snap in and flange mounting
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators



# 2000 Slide Switches - up to 5 position

10A 250Vac



## Key Features

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

## Approvals and specifications

- ☑ 10A 250Vac T85  
6(3)A 250Vac T85
  - ☑ UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL 65°C, file no. E45221, CSA file no. LR10990
- μ contact gap  
Please specify: Standard action (SP116) or Light action (SP118).  
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider
<p><b>K</b></p> <p>2.8 x 0.8</p> <p><b>R</b></p> <p>2.8 x 0.8</p> <p><b>T</b></p> <p>Solder</p> <p><b>X</b></p> <p>PCB 0.8 Sq.</p> <p><b>Y</b></p> <p>PCB 0.8 Sq.</p> <p>For mounting stability switches have extra "support" terminals</p> <p>* Nominal - Dimension varies with body type. For exact figure call sales</p>	<p><b>2</b></p>	<p><b>2</b></p> <p>Switching positions</p>	<p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p> <p><b>3</b></p> <p>Switching positions</p> <p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p> <p><b>4</b></p> <p>Switching positions</p> <p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p> <p><b>5</b></p> <p>Switching positions</p> <p><b>10</b></p> <p><b>20</b></p> <p><b>30</b></p> <p><b>40</b></p>	<p><b>0</b></p> <p><b>1</b></p> <p><b>2</b></p> <p><b>3</b></p> <p><b>4</b></p> <p><b>5</b></p> <p><b>6</b></p> <p><b>7</b></p> <p><b>9</b></p> <p><b>A</b></p> <p><b>B</b></p> <p><b>C</b></p> <p><b>D</b></p> <p><b>E</b></p> <p><b>G</b></p> <p><b>H</b></p> <p><b>J</b></p> <p><b>K</b></p> <p><b>L</b></p> <p><b>N</b></p> <p><b>P</b></p> <p><b>R</b></p> <p><b>S</b></p> <p><b>T</b></p>

## Examples



X22205C ---



T2220EC ---



T23206A ---




















T24306A ---



T25302A ---

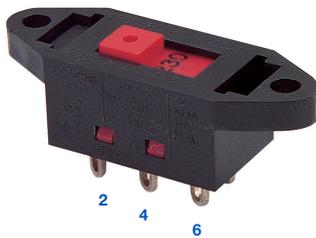


T25100A ---

Body		Options	Dimensions		
<p><b>C</b> 2 positions</p> 	<p><b>H</b> 2 positions</p> 	<p><b>Colour</b> Call sales for custom colours. A full range is available for large orders.</p> <p><b>Legend printing</b> A wide range is available. For all options call sales</p>	<p><b>C</b> 2 positions</p> 	<p><b>H</b> 2 positions</p> 	<p><b>Cut-out / PCB Matrix</b></p> 
<p><b>A</b> 3 positions</p> 	<p><b>H</b> 3 positions</p> 		<p><b>A</b> 3 positions</p> 	<p><b>H</b> 3 positions</p> 	<p><b>Cut-out / PCB Matrix</b></p> 
<p><b>A</b> 4 positions</p> 	<p><b>H</b> 4 positions</p> 		<p><b>A</b> 4 positions</p> 	<p><b>H</b> 4 positions</p> 	<p><b>Cut-out / PCB Matrix</b></p> 
<p><b>A</b> 5 positions</p> 			<p><b>A</b> 5 positions</p> 		<p><b>Cut-out / PCB Matrix</b></p> 

# 2000 Slide Switches - Snap fit and panel mount

10A 250Vac



115/230 is preferred legend

## Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

## Approvals and specifications

10A 250Vac T85  
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive  
UL CSA 4A 300Vac  
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap

Please specify: Standard action (SP116) or Light action (SP118).







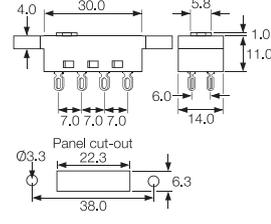
2000 series lubrication is inorganic and does not degrade plastics.

Terminal	Series	Position	Circuit	Slider		
<b>K</b>  2.8 x 0.8	<b>2</b>	<b>2</b> Switching positions	<b>10</b> 	<b>0</b>  <b>6</b>  <b>2</b>  <b>7</b>  <b>3</b>  <b>8</b>  <b>4</b>  <b>9</b>  <b>5</b>  <b>A</b>  <b>S</b> 		
			<b>20</b> 		<b>C</b>  <b>D</b>  <b>E</b>  <b>H</b>  <b>K</b>  <b>T</b> 	
			<b>30</b> 			<b>L</b>  <b>M</b>  <b>N</b>  <b>P</b>  <b>R</b> 
			<b>40</b> 			
<b>20</b> 	<b>3</b> Switching positions					
<b>30</b> 						
<b>40</b> 						

PCB 0.8 Sq.  
For mounting stability switches have extra "support" terminals  
\* Nominal - Dimension varies with body type. For exact figure call sales

## Examples



Body	Options	Dimensions																					
<p><b>B</b> With mounting holes</p>  <p><b>E</b> Snap fit</p>  <p><b>F</b> Snap fit (single contact ON OFF only)</p> 	<p><b>Colour</b> Call sales for custom colours. A full range is available for large orders. Standard body colour is black.</p>	<p><b>2 Pos B</b></p>  <p><b>2 Pos E</b></p>  <p><b>2 Pos F</b></p> 	<p><b>3 Pos B</b></p>  <table border="1" data-bbox="1173 1332 1364 1556"> <thead> <tr> <th>Panel thickness</th> <th>Dim. Y</th> </tr> </thead> <tbody> <tr> <td>0.8-1.2</td> <td>29.75/29.85</td> </tr> <tr> <td>1.63</td> <td>30.15/30.25</td> </tr> <tr> <td>2.0</td> <td>30.35/30.45</td> </tr> <tr> <td>2.5</td> <td>30.55/30.65</td> </tr> </tbody> </table> <table border="1" data-bbox="1173 1646 1364 1892"> <thead> <tr> <th>Panel thickness</th> <th>Dim. Y</th> </tr> </thead> <tbody> <tr> <td>0.8-1.2</td> <td>29.75/29.85</td> </tr> <tr> <td>1.63</td> <td>30.15/30.25</td> </tr> <tr> <td>2.0</td> <td>30.35/30.45</td> </tr> <tr> <td>2.5</td> <td>30.55/30.65</td> </tr> </tbody> </table>	Panel thickness	Dim. Y	0.8-1.2	29.75/29.85	1.63	30.15/30.25	2.0	30.35/30.45	2.5	30.55/30.65	Panel thickness	Dim. Y	0.8-1.2	29.75/29.85	1.63	30.15/30.25	2.0	30.35/30.45	2.5	30.55/30.65
Panel thickness	Dim. Y																						
0.8-1.2	29.75/29.85																						
1.63	30.15/30.25																						
2.0	30.35/30.45																						
2.5	30.55/30.65																						
Panel thickness	Dim. Y																						
0.8-1.2	29.75/29.85																						
1.63	30.15/30.25																						
2.0	30.35/30.45																						
2.5	30.55/30.65																						

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Slide Switches](#) category:*

*Click to view products by [Bulgin](#) manufacturer:*

Other Similar products are found below :

[6-1437581-1](#) [M43R](#) [MHS123K15D](#) [MHS133K](#) [MHSS1104A](#) [MMD](#) [GH49S010001](#) [MSS12A](#) [EPS1PC1](#) [1825074-1](#) [1825160-3](#) [1825167-2](#)  
[1825289-7](#) [K232CB](#) [25139NLDB](#) [25449NAH](#) [SLB1240R45](#) [1825078-1](#) [1825080-4](#) [1825269-1](#) [1825270-2](#) [STS141RA04](#) [T2215BEN506](#)  
[GH46P000001](#) [GH46W000001](#) [GH49P010001](#) [25339NA](#) [M42A](#) [TG36P000000](#) [TG36P000050](#) [AYZ0202AG](#) [47227LFE](#) [49331L](#) [50208L](#)  
[L203091MS02Q](#) [4-1437581-7](#) [X2225CR-437W](#) [49329L](#) [1101M1S3ZB8E2](#) [1-1437581-1](#) [MSS2225G04](#) [TG39W000000](#) [1825075-1](#)  
[MSS42G](#) [TG36WS80065](#) [T105S1CWZBE](#) [SLB124145](#) [SLB1280R5](#) [SLB1340R45](#) [25136NLDB](#)