


		D		E	
REV.	DESCRIPTION		ECN NO.	NAME	DATE

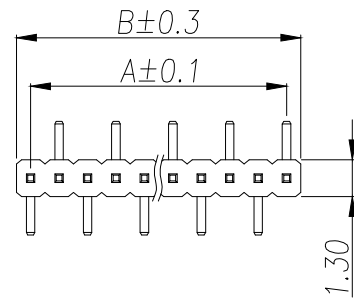

SPECIFICATIONS

Current Rating:0.75 Amps

Withstanding Voltage:AC 500V

Insulation Resistance:1000MΩ Min

Contact Resistance: 20mΩ Max

Operation Temperature: -40° to $+105^{\circ}$



Insulator Material: Polyester (UL94V-0)

Contact Material: Phosphor bronze

Standard:PA6T

Contact Plating:Gold Flash

Max. Processing Temp: 240°C for 30–60 seconds
(260°C for 5 seconds)

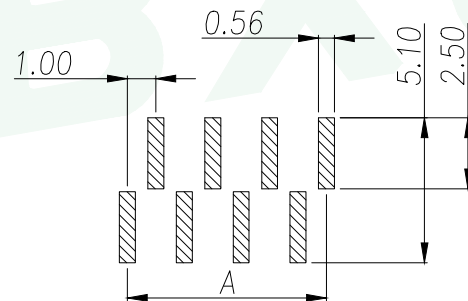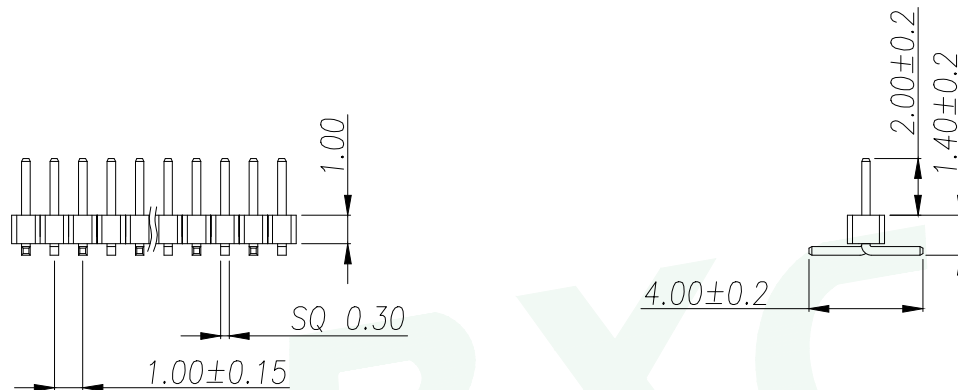


RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

PART NUMBER DESCRIPTION:

A100UL-WDNP

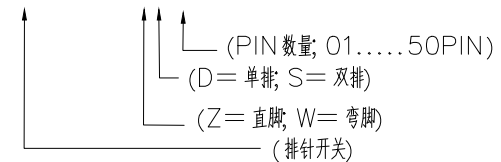

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD					
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°		TITLE: 1.0PH H1.0 1xnPin SMT W1.3 PC4.0 PA2.0 PB1.4 L5.0 6T(左前与右前)					
		DWG. NO.: A100UL-WDNP		DRAWN: MAX			
		PART NO.: A100UL-WDNP		CHECKED: ELLA			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [BXCONN](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)