

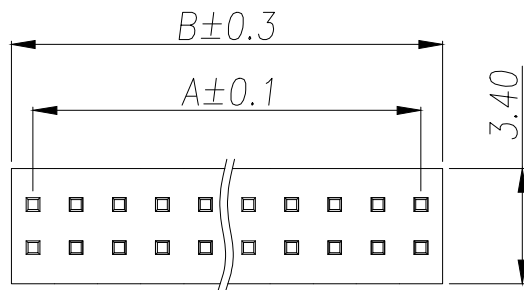
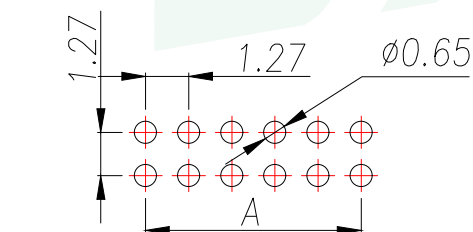


|      |             |         |      |      |  |
|------|-------------|---------|------|------|--|
|      |             | D       |      | E    |  |
| REV. | DESCRIPTION | ECN NO. | NAME | DATE |  |
|      |             |         |      |      |  |

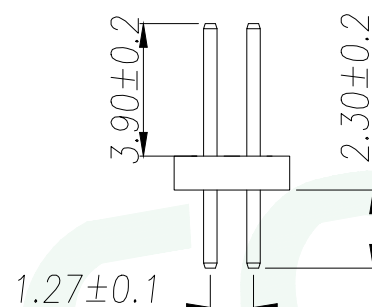

## SPECIFICATIONS

Current Rating:1.0 Amps  
Withstanding Voltage:AC 500V  
Insulation Resistance:1000MΩ Min  
Contact Resistance:20mΩ Max  
Operation Temperature:-40° to+105°  
Insulator Material:Polyester(UL94V-0)  
Contact Material:Brass  
Standard:PA6T  
Contact Plating:Gold Flash  
Max.Processing Temp: 240°C for30-60seconds  
(260°C for5seconds)

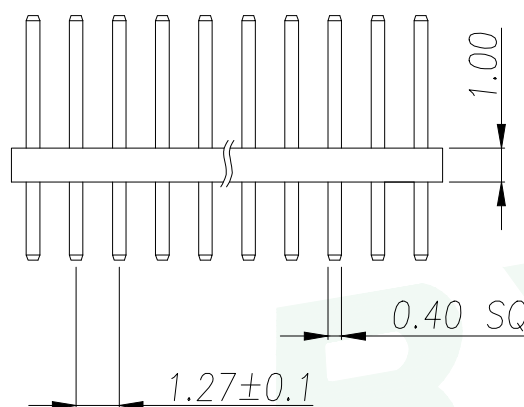

RECOMMEND P.C.B LAYOUT

---

PCB TOLERANCE:±0.05 (TOP VIEW)

|                                                                                       |  |                                                               |                |                  |                  |                  |                                                                                       |  |
|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------|----------------|------------------|------------------|------------------|---------------------------------------------------------------------------------------|--|
| GENERAL TOLERANCE                                                                     |  | DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD                 |                |                  |                  |                  |  |  |
| DIM. TOL.<br>X<br>X.X ±0.30<br>X.XX ±0.25<br>X.XXX ±0.15<br>GENERAL ANGLE: ±3°        |  | TITLE: 1.27PH H1.0 2xnPin 180度 W3.4 PC2.3 PA3.9 PB1.0 L7.2 6T |                |                  |                  |                  |  |  |
| DWG. NO.: A127UP-ZSNP                                                                 |  |                                                               |                |                  | DRAWN: MAX       |                  |                                                                                       |  |
| PART NO.: A127UP-ZSNP                                                                 |  |                                                               |                |                  | CHECKED: ELLA    |                  |                                                                                       |  |
|  |  | UNIT:<br>mm                                                   | SCALE:<br>none | SHEET:<br>1 of 1 | DWG. SIZE:<br>A4 | LAYER:<br>bxconn | APPROVED: WILL                                                                        |  |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Headers & Wire Housings](#) *category:*

*Click to view products by* [BXCONN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)  
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)  
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)  
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)  
[803-43-024-10-001000](#)