
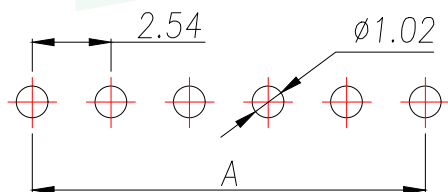
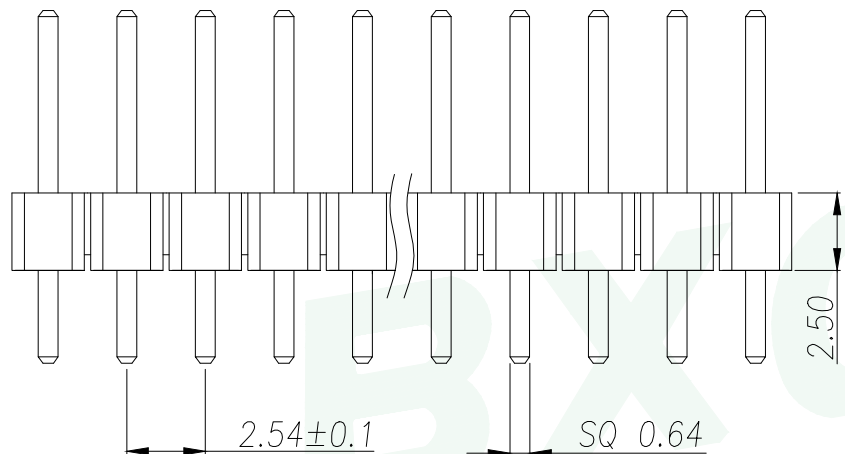


SPECIFICATIONS

SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for 30-60seconds
(260°C for 5seconds)

<i>P/N</i>	<i>PIN</i>	<i>DIM.A</i>	<i>DIM.B</i>
A254UP-ZD1P	1	0.00	2.54
A254UP-ZD2P	2	2.54	5.08
A254UP-ZD3P	3	5.08	7.62
A254UP-ZD4P	4	7.62	10.16
A254UP-ZD5P	5	10.16	12.70
A254UP-ZD6P	6	12.70	15.24
A254UP-ZD7P	7	15.24	17.78
A254UP-ZD8P	8	17.78	20.32
A254UP-ZD9P	9	20.32	22.86
.....			
A254UP-ZD40P	40	$(PIN-1) \times 2.54$	$(PIN) \times 2.54$

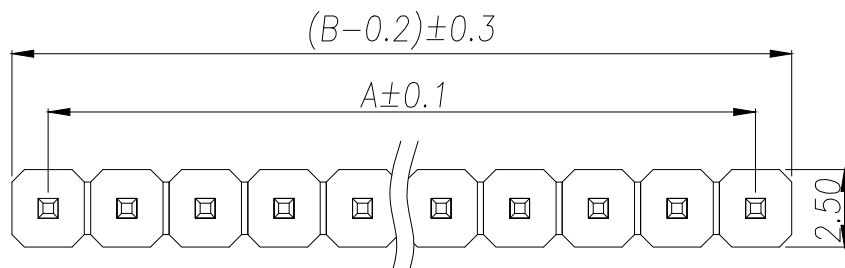

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE: ± 0.05 (TOP VIEW)

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD					
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°		TITLE: 2.54PH H2.5 1xPin 180度 PC3.0 PA6.0 PB2.5 L11.5 6T					
		DWG. NO.: A254UP-ZDNP		DRAWN: MAX			
		PART NO.: A254UP-ZDNP		CHECKED: ELLA			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [BXCONN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)