


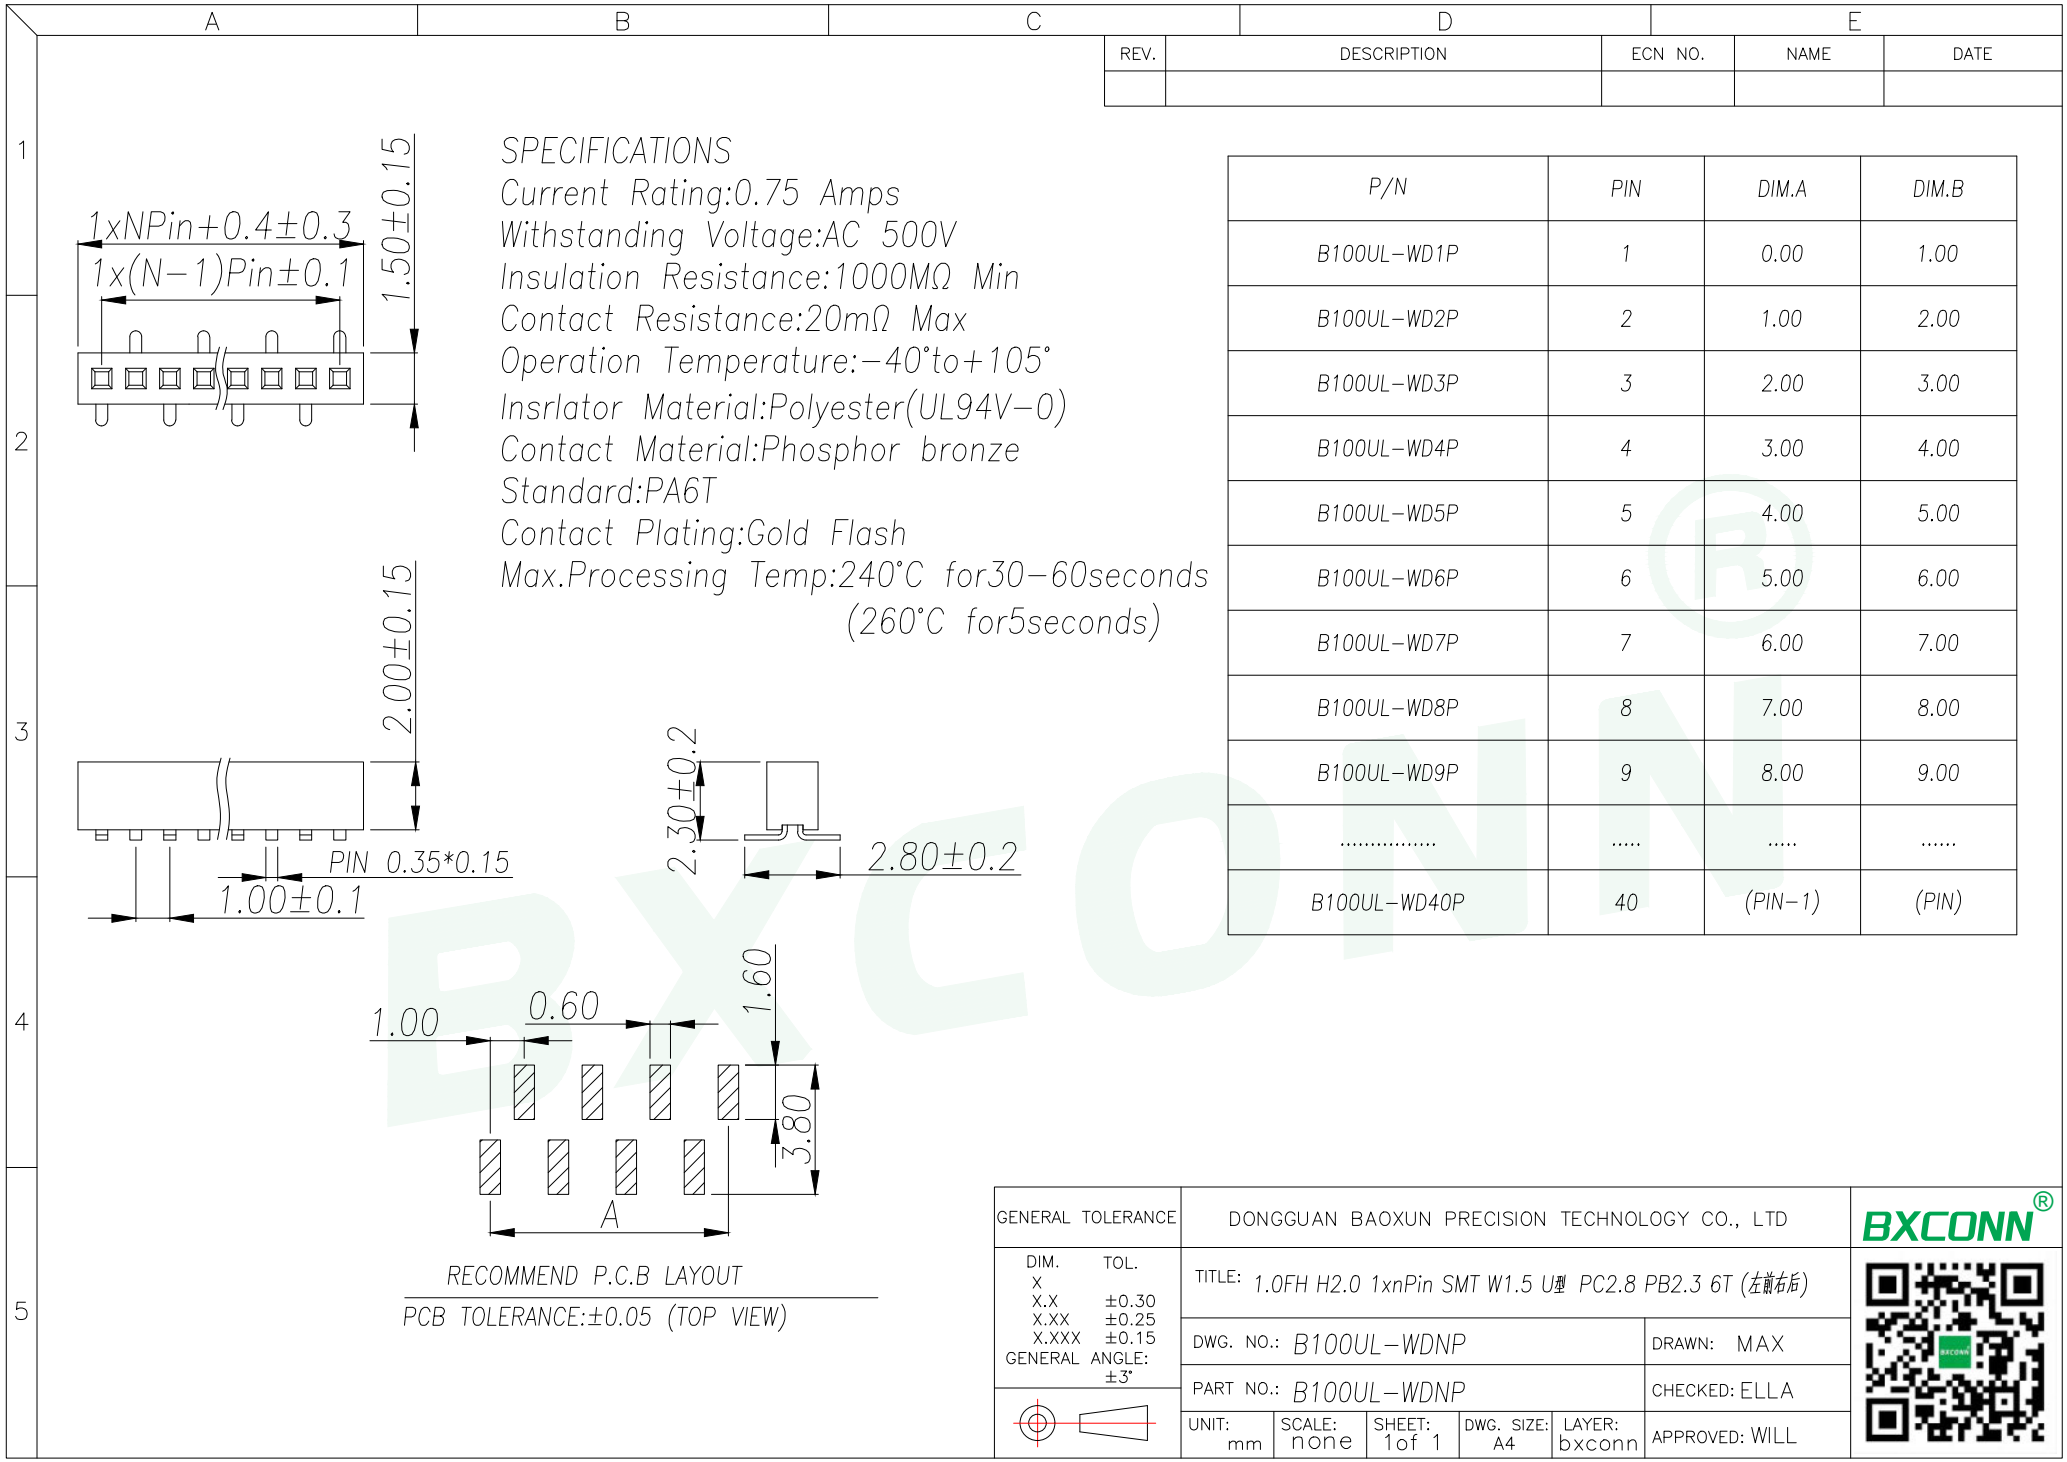

SPECIFICATIONS

Current Rating:0.75 Amps

Withstanding Voltage:AC 500V

Insulation Resistance:1000MΩ Min

Contact Resistance:20mΩ Max

Operation Temperature:-40°to+105°

Insrlator Material:Polyester(UL94V-0)

Contact Material:Phosphor bronze


Standard:PA6T

Contact Plating:Gold Flash

Max.Processing Temp:240°C for30-60seconds
(260°C for5seconds)

REV.	DESCRIPTION	ECN NO.	NAME	DATE

P/N	PIN	DIM.A	DIM.B
B100UL-WD1P	1	0.00	1.00
B100UL-WD2P	2	1.00	2.00
B100UL-WD3P	3	2.00	3.00
B100UL-WD4P	4	3.00	4.00
B100UL-WD5P	5	4.00	5.00
B100UL-WD6P	6	5.00	6.00
B100UL-WD7P	7	6.00	7.00
B100UL-WD8P	8	7.00	8.00
B100UL-WD9P	9	8.00	9.00
.....			
B100UL-WD40P	40	(PIN-1)	(PIN)

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD					BXCONN[®]	
DIM.	TOL.	TITLE: 1.0FH H2.0 1xnPin SMT W1.5 U型 PC2.8 PB2.3 6T (左前右后)						
X		DWG. NO.: B100UL-WDNP					DRAWN: MAX	
X.X	±0.30							
X.XX	±0.25							
X.XXX	±0.15							
GENERAL ANGLE: ±3°		PART NO.: B100UL-WDNP					CHECKED: ELLA	
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL	
								

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [BXCONN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)