


		D		E	
REV.	DESCRIPTION	ECN NO.	NAME	DATE	

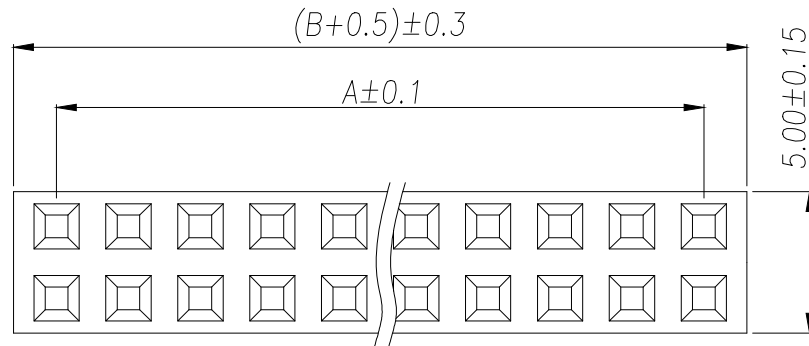

SPECIFICATIONS

Current Rating: 3Amps

Insulation Resistance: 1000MΩ Min

Contact Resistance: 20mΩ Max

Withstanding Voltage: AC 1000V

Operation Temperature: -40° to $+105^{\circ}$

Contact Material: Brass




Standard: PA6T

Insulator Material: Polyester(UL 94V-0)

Contact Plating: Gold Flash

Max. Processing Temp: 240°C for 30–60 seconds
(260°C for 5 seconds)

P/N	PIN	DIM.A	DIM.B
B254YP-ZS1P	1	0.00	2.54
B254YP-ZS2P	2	2.54	5.08
B254YP-ZS3P	3	5.08	7.62
B254YP-ZS4P	4	7.62	10.16
B254YP-ZS5P	5	10.16	12.70
B254YP-ZS6P	6	12.70	15.24
B254YP-ZS7P	7	15.24	17.78
B254YP-ZS8P	8	17.78	20.32
B254YP-ZS9P	9	20.32	22.86
.....			
B254YP-ZS40P	40	$(PIN-1) \times 2.54$ 4	$(PIN) \times 2.54$

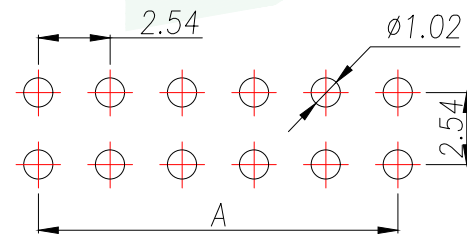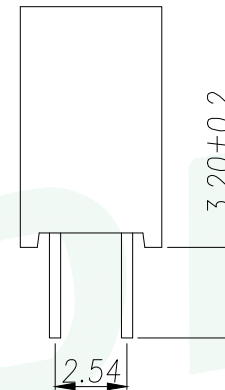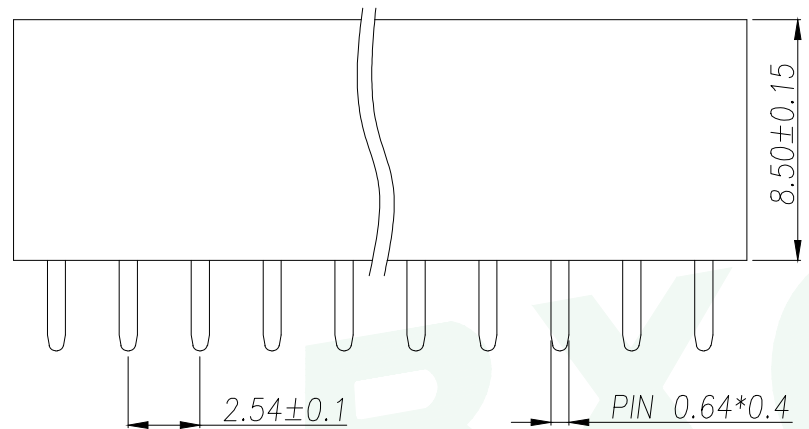

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD					
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°		TITLE: 2.54FH H8.5 2xPin 180度 Y型 PC3.2 6T					
		DWG. NO.: B254YP-ZSNP		DRAWN: MAX			
		PART NO.: B254YP-ZSNP		CHECKED: ELLA			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) *category:*

Click to view products by [BXCONN](#) *manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)