REV.	DESCRIPTION	ECN NO.	NAME	DATE

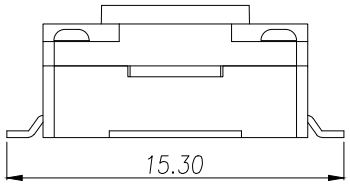





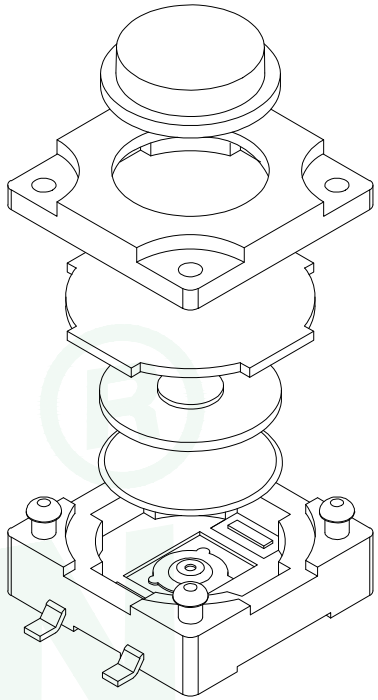

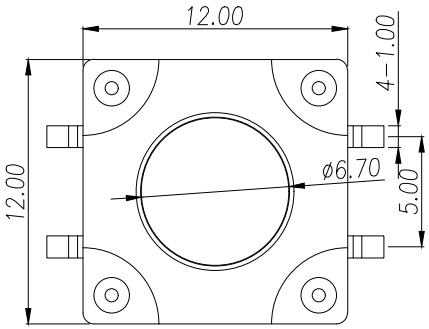

T	S	1	8	0	4	–					H		

安装方式:
T:贴片
C:插件
B:沉板
J:包脚

定位柱:
D:带柱
Z:不带柱

高度:
35:3.5H
38:3.8H
43:4.3H
.....

力度:
A:160g
B:260g

包装方式:
M:盘装
S:袋装

H
4.3
4.5
5.0
5.5
.....
12.0

主要技术参数、性能

The Main Thchnology Performance

额定电流、电压 Rate voltage.current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 Travel	0.30±0.10mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min



电路图

CIRCUIT DIAGRAM

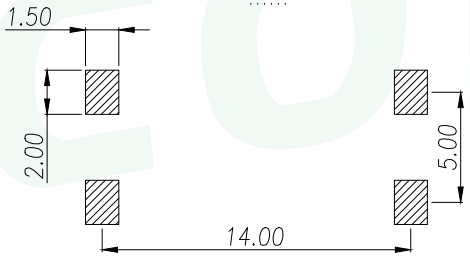

PCB.焊接图

PCB.WELDING DRAWING

ITEM 项目	DESCRIPTION 名称	MATERIAL 材质	QTY 数量	FINSH/COLOR 表面处理/颜色
G	按钮	PPA	1	黑色
F	盖板	PPA	1	黑色
E	防尘层	硅胶	1	黑色
D	小按钮	PPA	1	黑色
C	弹片	磷铜/不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银

GENERAL TOLERANCE	DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD	BXCONN®
DIM. TOL. X X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 GENERAL ANGLE: ±3°	TITLE: TACT SWITCH	
	DWG. NO.: TS1804-TZXXHXS	DRAWN: MAX
	PART NO.: TS1804-TZXXHXS	CHECKED: ELLA
	UNIT: mm / SCALE: none / SHEET: 1of 1 / DWG. SIZE: A4 / LAYER: bxconn	APPROVED: WILL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Tactile Switches ***category:***

Click to view products by BXCONN ***manufacturer:***

Other Similar products are found below :

6407-250V-25273P MJTPSHW ADTSA62NV B3F-3123 1977177-8 1977266-1 ADTSA63NV ADTSM21NSVTR ADTSM25RVTR ADTSM32NVTR ADTSMW64RV 1977120-6 FSMRA4JHA04 GS4.70F300QP KSC241J SP DELTA LFS 3FTL600RAS 3FTL640RAS Y96K132V0FPLFS 09158 6407-250V-25343P ADTSM31NVTR 2-1977120-7 TSJW-5.2-260-TR TME1-01-Z Y651050400P B3WN6002S ADTSG648NV ADTSM62KSVTR MJTP1138DTR ADTSM648NV 95C06E3RAT 3ATH9Q FSMRA8JHA04 Y33R411N9FPLFT Y33R51139FPLFT Y31C01402FPLFS PTS645SK50SMTR92 ADTSM32NVB KMS233GPWTLFG Y78B64124FP Y31CJ244KFP LFS Y31C2144LFP LFS Y33A812C5FP LFT Y56B2D120FP LFS Y31C5144KFP LFS PTS645 DVM83-BN125-2 LFS KSC621G OL LFS KT11P4SA1M35 LFG SS-FORM K5V1BA43TP3 K5V 5 WX 4 3 G