

承認書

SPECIFICATION FOR APPROVAL

客户名稱
CUSTOMER

客户料号
CUS. P/N

尺寸
DIMENSION

CRH-6.35x12.7x3.3

編號
SERIAL NO.

NO. CF1025657187

日期
DATE

2023年8月6日

出圖 DRAWING		
發行 ISSUE	復核 CHECKED	核準 APPROVAL
DATE: 2023/8/6		

承認 CUSTOMER APPROVAL



东莞市灿峰电子有限公司

DONG GUAN CITY CAN FENG ELETRONICS CO., LTD

网址: www.canfengele.com E-mail: canfengdianzi@163.com

联系方式

王小姐: 13556646144

洪先生: 13809826886

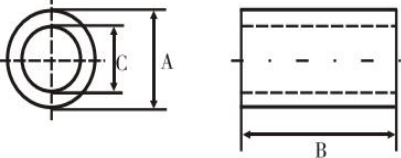
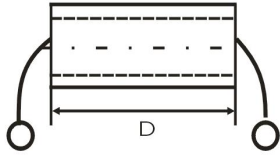



承認書

SPECIFICATION FOR APPROVAL

規格 ITEM	CRH-6.35x12.7x3.3		編號 SERIAL NO.	NO. CF1025657187	
1. 形狀尺寸 (單位mm) ; SHAPE & DIMENSION(unit/mm); 			A	6.35 ± 0.5 mm	
			B	12.70 ± 0.5 mm	
			C	3.30 ± 0.4 mm	
			D		
			E		
			F		
			G		
			2. 電器性能檢測項目 ELECTTRONICAL REQUIREMENTS;		
<input type="checkbox"/> L		TEST FREQ		測試儀器 TESTING INSTRUMENTS	
<input type="checkbox"/> Q		TEST FREQ	KHZ MHZ	1. Q-METER: <input type="checkbox"/> HP-4342A <input checked="" type="checkbox"/> MQ-172	
<input checked="" type="checkbox"/> Z	Z1=40 Ω MIN 25MHZ	KHZ	Z3=	KHZ MHZ	2. LCR-METER: <input type="checkbox"/> TH2826
	Z2=70 Ω MIN 100MHZ	KHZ	Z4=	KHZ MHZ	3. IMPEDANCE ANALYZER: <input checked="" type="checkbox"/> HP-4191A <input type="checkbox"/> Agilent 16092A <input type="checkbox"/> TH2826
溫度 TEMP	25±5℃	濕度 HUMIDITY	60±8%	4. L-METER: <input type="checkbox"/> TH-2775B	
繞線: WINDING	Z: Φ0.5*100L(mm)*0.5TS			5. DIGITAL MINI-OHM METER: VP2941A	
3. 外觀 THE LIMIT OF BREAKAGE:					
項目 Item			標準值 Standard Value		
一處缺陷的面积 Area of a breakage			≤1mm ²		
总缺陷面积 ALL area of the breakage			≤2mm ²		
缺陷深度 The depth of the breakage			≤0.4mm		
毛刺长度 The length of burr			≤0.2mm		
4. 包裝 PACKAGING: 內包裝采用泡塑盒, 外包裝采用紙箱, 每箱產品外面都蓋上标签 (包括品名、數量、批號、檢驗員)。 Inner packing gdopts foam plastics box, outer packing adopts carton and each carton should have a qualified label outside(include the variey, quantity, batch number and inspector).					

檢 測 數 據

INSPECTION DATA

規 格 ITEM	CRH-6.35x12.7x3.3					編 號 SERIAL NO.	NO. CF1025657187							
1. 形壯尺寸(单位/毫米): SHAPE & DIMENSION(unit/mm): = 							<input type="checkbox"/> L							
							<input type="checkbox"/> Q				KHZ MHZ			
							<input checked="" type="checkbox"/> Z		Z1=40 Ω MIN KHZ 25MHZ		Z1= KHZ MHZ			
									Z2=70 Ω MIN KHZ 100MHZ		Z4= KHZ MHZ			
							溫 度 TEMP		25±5°C		濕 度 HUMIDITY		60±8%	
							繞 线: WINDING		Z: Φ 0.5*100L(mm)*0.5TS					
項 目 ITEM	电 气 性 能 ELECTRONIC CHARACTERISTICS						尺 寸 DIMENSION(unit:mm)							
	Q	L(μH)	Z1(Ω)	Z2(Ω)	Z3(Ω)	Z4(Ω)	A	B	C	D	E	F		
			40	70			6.35	12.7	3.3					
+			/	/			0.5	0.5	0.4					
-			0	0			0.5	0.5	0.4					
1			56.8	99.4			6.34	12.74	3.31					
2			56.9	96.2			6.32	12.71	3.31					
3			57.6	96.6			6.36	12.75	3.30					
4			58.5	95.2			6.34	12.87	3.32					
5			59.8	98.7			6.32	12.70	3.30					
6			56.9	96.6			6.38	12.88	3.29					
7			60.3	93.8			6.36	12.73	3.32					
8			61.6	100.1			6.35	12.76	3.32					
9			55.6	98.5			6.36	12.79	3.30					
10			43.2	110.5			6.36	12.84	3.30					
X			56.7	98.6			6.35	12.78	3.31					
Y/N			Y	Y			Y	Y	Y					
2. 測試儀器 TESTING INSTRUMENTS E4991A 							檢 測 INSPECTION		復 核 CHECK		確 認 APPROVAL			
														

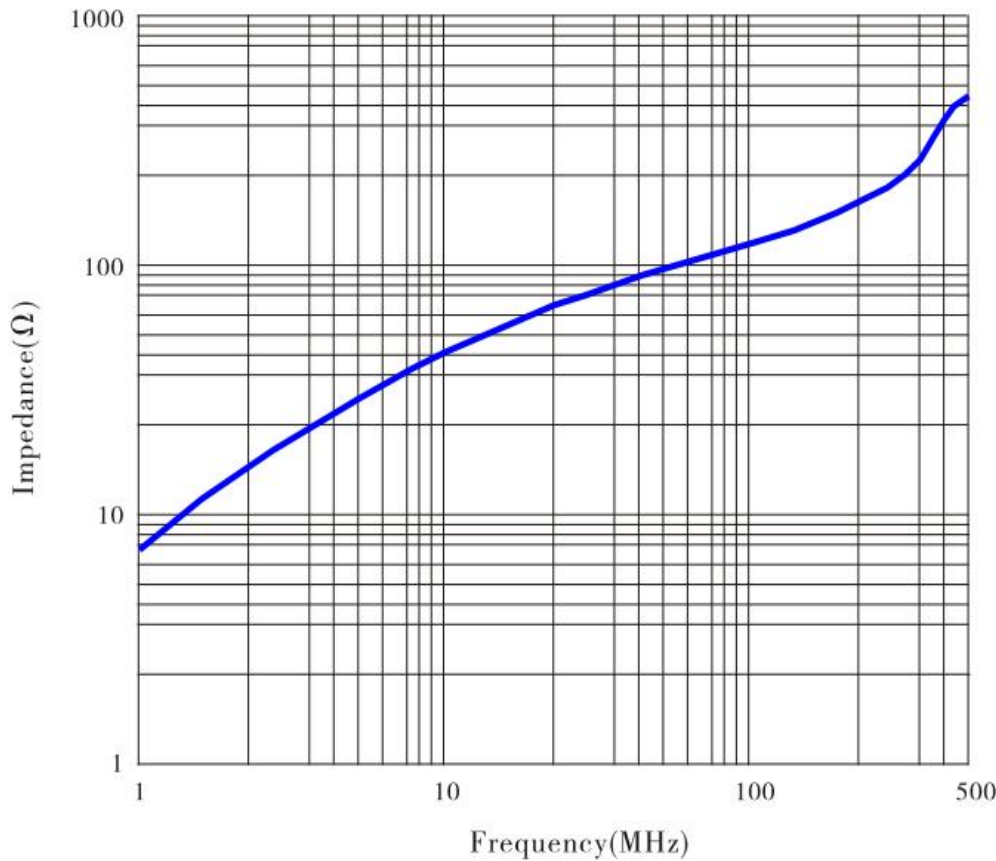
阻抗 - 頻率曲綫

IMPEDANCE V.S.FREQUENCY (Z-Y)

規格 ITEM	CRH-6.35x12.7x3.3	編號 SERIAL NO.	NO. CF1025657187
------------	-------------------	------------------	------------------

材质特性：
MATERIAL CHARACTERISTICS

材料 牌号 Material	初始磁 导率 Initial Permeability	比损耗因子 Relative Loss Factor	比温度系数 Relative Temperature Coefficient	饱和磁通密度 Saturation Magnetic Flux Density	剩磁 Reman- ence	矫顽力 Coercivi- ty	居里温度 Curie Tempera- ture	电阻率 Electric Resistiv- ity	使用范围 Applied Frequenc y Range	密度 Densit y
Unit symbol	μ_i $\pm 20\%$	$\tan \delta / \mu_i$ $\times 10^{-6}$	$\alpha \mu_i \gamma$ $\times 10^{-6}$	Bs (MT)	Br (MT)	HC (A/m)	Tc (°C)	ρ ($\Omega \cdot m$)	F Mhz	d g/cm ³
F9	850	16(0.1MHz)	5-10	350(1600A/m)	200	20	>110	>10 ⁵	0.1-1.5	4.7



测试条件； TESTING CONDITION;	檢 測 INSPECTION	復 核 CHECK	确 認 APPROVAL
1. 测试仪器： E4991A Testing Equipment:			
2. 测试频率区间： 1MHZ-500MHZ Testing Frequency Range:			
3. 测试绕组： $\Phi 0.5 \times 100L(mm) \times 0.5TS$ Testing Coil Specification:			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Screws & Fasteners](#) category:

Click to view products by [canfeng](#) manufacturer:

Other Similar products are found below :

[5721-1440-1/4-SS](#) [0098.0094](#) [0098.9206](#) [59781-6](#) [0098.9212](#) [618-00001](#) [6292-1](#) [6-306105-9](#) [690432-1](#) [699161-000](#) [700989](#) [7230-3](#) [72609-02](#) [CAPTIVE JACK SCREW](#) [73542-02](#) [CAPTIVE SHORT THUMBSCREW](#) [809704-1](#) [8700](#) [8860220](#) [992763-3](#) [A168P1](#) [1-24921-1](#) [125416-1](#) [1301810313](#) [1-306131-6](#) [1301830042](#) [1458](#) [18029-4](#) [NBDSCREW](#) [NUT-16-3P-HEX-NICKEL](#) [20993.45098](#) [21004-1](#) [21009-4](#) [21014-5](#) [21021-2](#) [CA24037A01](#) [22987-4](#) [2327](#) [240632-1](#) [240632-2](#) [89506-9801](#) [2504](#) [9031](#) [9-1393249-2](#) [26-0048PP](#) [27210-1](#) [27210-8](#) [9318](#) [9520](#) [29300](#) [#2x3/8 SCREW](#) [3000-07](#)