



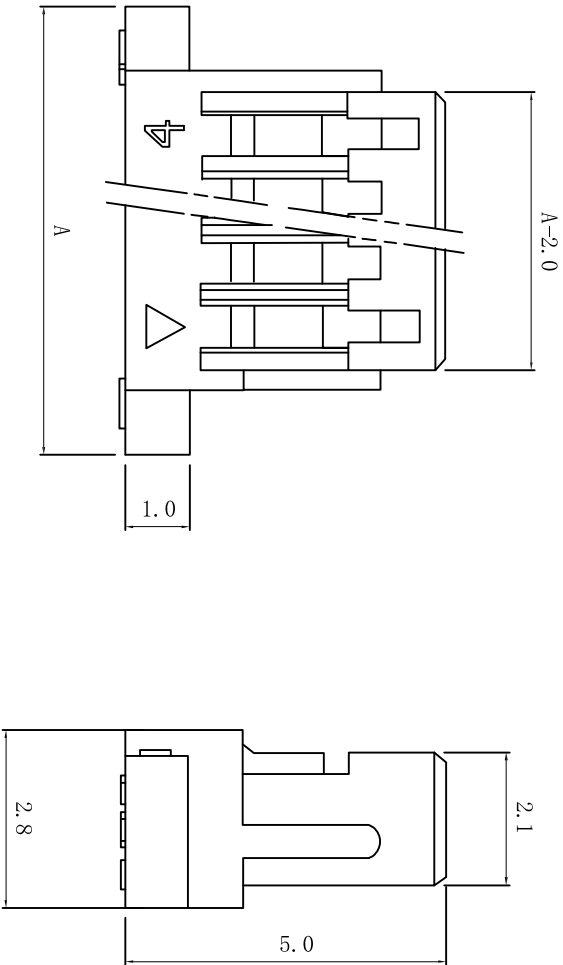

Specifications:
Current Rating: 1A
Voltage Rating: 50V AC/DC
Contact Resistance:20 Milliohms Max
Contact Resistance:100mW/min
Withstanding Voltage: 500V.AC/min
Operating TemPerture Range:-25°C~+85°C

Material:
Insulation: PA66

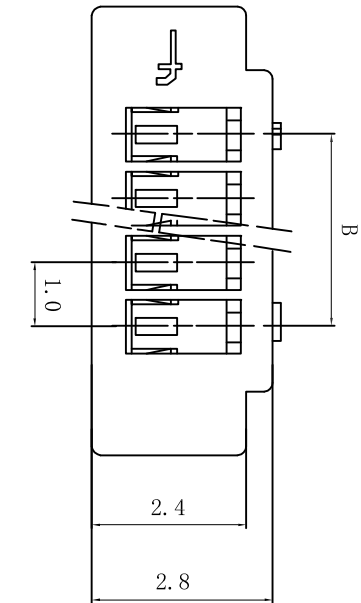

Poles	Part No.	Dimensions mm	
		A	B
2	2-1001H02P-0000	5.0	1.0
3	2-1001H03P-0000	6.0	2.0
4	2-1001H04P-0000	7.0	3.0
5	2-1001H05P-0000	8.0	4.0
6	2-1001H06P-0000	9.0	5.0
7	2-1001H07P-0000	10.0	6.0
8	2-1001H08P-0000	11.0	7.0
9	2-1001H09P-0000	12.0	8.0
10	2-1001H10P-0000	13.0	9.0
11	2-1001H11P-0000	14.0	10.0
12	2-1001H12P-0000	15.0	11.0
13	2-1001H13P-0000	16.0	12.0
14	2-1001H14P-0000	17.0	13.0
15	2-1001H15P-0000	18.0	14.0
16	2-1001H16P-0000	19.0	15.0

APPROVED:		DATE:	Ckmtw 深圳市灿科盟实业有限公司 CHANKLEMENT INDUSTRYCO., LTD			
CHECKED:		DATE:				
DRAWN:		DATE:				
LYF		2019-04-08	CLIENT P/N	/	UNIT	mm
			SCALE	free	REV.	A
			FILE NO.	Ckmtw-SH10-0020	REV.	JLXI

TOLERANCE TABLE

.0	±0.20
.00	±0.10
.000	±0.05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) ***category:***

Click to view products by [Cankemeng](#) ***manufacturer:***

Other Similar products are found below :

[892-18-020-10-001101](#) [0010894062](#) [0010977306](#) [0015477636](#) [0015917161](#) [0022104068](#) [0022121042](#) [0022155065](#) [0022281023](#) [57102-F02-18ULF](#) [PCN6B-10P-2.5DS](#) [58102-G61-06LF](#) [582553-1](#) [0015911208](#) [01.001.5753.1](#) [0022285048](#) [0050291907](#) [02.125.8002.8](#)
[CSU011177004](#) [622-0430](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#) [65781-047](#)
[65817-010LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#)
[71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)
[803-43-024-10-001000](#)